



(51) International Patent Classification:

F28F 3/12 (2006.01) *B01F 15/06* (2006.01)
C12M 1/02 (2006.01) *F28F 13/06* (2006.01)

(21) International Application Number:

PCT/US2010/047763

(22) International Filing Date:

3 September 2010 (03.09.2010)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/240,029 4 September 2009 (04.09.2009) US

(71) Applicant (for all designated States except US): **ABEC, INC.** [US/US]; 3998 Schelden Cir, Bethlehem, PA 18017-8936 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **KNIGHT, Cameron** [US/US]; 1543 N. Pearson, Springfield, MO 65802 (US).

(74) Agent: **HALLORAN, Patrick, J.**; 3141 Muirfield Road, Center Valley, PA 18034 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: HEAT TRANSFER BAFFLE SYSTEM AND USES THEREOF

FIGURE 3

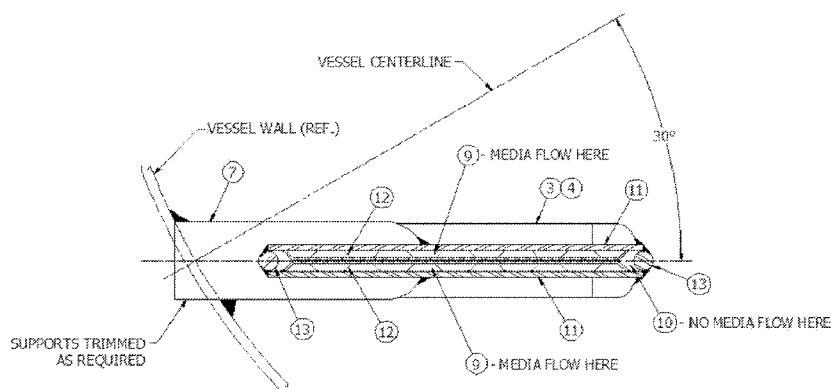

(57) Abstract: This disclosure describes an improved heat transfer system for use in reaction vessels used in chemical and biological processes. In one embodiment, a heat transfer baffle comprising at least one distribution channel and at least one relief channel are provided. In another embodiment two sub-assemblies comprising said distribution and relief channels adjoined to one another are provided.