



- (51) International Patent Classification: Not classified
- (21) International Application Number:  
PCT/US2013/041776
- (22) International Filing Date:  
20 May 2013 (20.05.2013)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
13/484,767 31 May 2012 (31.05.2012) US
- (71) Applicant: UNITED TECHNOLOGIES CORPORATION [US/US]; One Financial Plaza, Hartford, Connecticut 06101 (US).
- (72) Inventors: BEATTIE, Jeffrey S.; 255 Foote Road, South Glastonbury, Connecticut 06073 (US). JACQUES, Jeffrey Michael; 58 Shaughnessy Drive, East Hartford, Connecticut 06118 (US). PIGGUSH, Justin D.; 2120 Ferry Street, La Crosse, Wisconsin 54601 (US).
- (74) Agent: SIRAGUSA, John M.; CARLSON, GASKEY & OLDS/PRATT & WHITNEY, c/o CPA Global, P.O. Box 52050, Minneapolis, Minnesota 55402 (US).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

— without international search report and to be republished upon receipt of that report (Rule 48.2(g))

(54) Title: TURBINE BLADE ROOT WITH MICROCIRCUIT COOLING PASSAGES

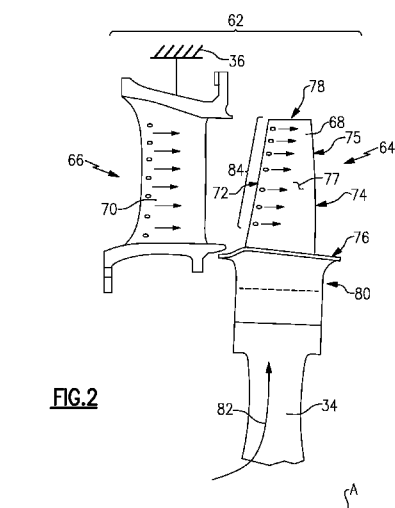

(57) Abstract: A method of fabricating an airfoil includes the steps of fabricating a first core including a first plurality of ribs defining a first plurality of passages of a completed airfoil, and fabricating a second core including a second plurality of ribs defining a second plurality of passages of the completed airfoil. The second plurality of ribs includes a plurality of standoffs. The plurality of standoffs set a spacing between the first plurality of ribs and the second plurality of ribs to define a spacing between the first plurality of channels and the second plurality of channels of the completed airfoil. The airfoil is then molded about the core assembly. Once completed, the core assembly is removed to provide a completed airfoil incorporating multiple microcircuits with a desired stability and structural integrity.