

16/03/03
2003028297

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
30 May 2002 (30.05.2002)

PCT

(10) International Publication Number
WO 02/42093 A1

(51) International Patent Classification⁷: **B60B 33/02**

[IE/IE]; 21 Glenarm Square, Drumcondra, Dublin 9 (IE).
WALSH, Thomas, Donal [IE/IE]; 114 Maelduin, Dun-
shaughlin, County Meath (IE).

(21) International Application Number: PCT/IE01/00146

(22) International Filing Date:
21 November 2001 (21.11.2001)

(74) Agents: **WELDON, Michael, J.** et al.: c/o John A.
O'Brien & Associates, Duncairn House, 3rd Floor, 14
Carysfort Avenue, Blackrock, County Dublin (IE).

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
20000949 21 November 2000 (21.11.2000) IE
S20010347 9 April 2001 (09.04.2001) IE

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DE (utility model), DK, DK (utility model), DM,
DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID,
IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT,
LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ,
OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM,
TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.

(71) Applicant (*for all designated States except US*): **ARROW
TECHNOLOGY SYSTEMS LIMITED** [IE/IE]; 78
Fitzroy Avenue, Drumcondra, Dublin 3 (IE).


(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR,
GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent

(72) Inventors; and


(75) Inventors/Applicants (*for US only*): **TIERNEY, Patrick**

[Continued on next page]

(54) Title: A TROLLEY WHEEL MECHANISM

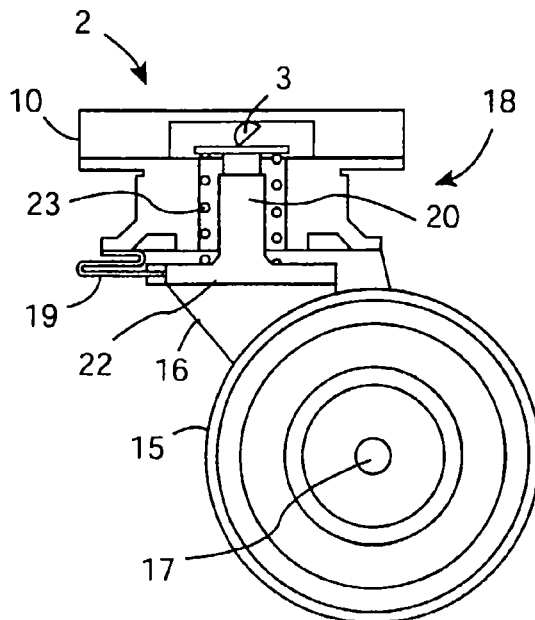

162162



ACTION

WO 02/42093 A1

(57) Abstract: A trolley wheel mechanism (1) has two caster wheel assemblies (2) each having a pair of wheels (15) mounted on a rotatable housing (18). In a free mode the wheels (15) are free to both rotate and to swivel. This is caused by the user pressing a release pedal (4). In a unidirectional mode a retainer lock (19) engages a brake disc (22) to prevent swivelling of the housing (18). This is caused by the user pressing both pedals (4, 5) simultaneously. A brake mode is caused by the user pressing the apply pedal (5).