

9801291-7


IPOS's copy

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6: E04F 15/04, F16B 5/00	A1	(11) International Publication Number: WO 97/47834 (43) International Publication Date: 18 December 1997 (18.12.97)
(21) International Application Number: PCT/EP97/03006 (22) International Filing Date: 7 June 1997 (07.06.97) (30) Priority Data: ① 9600527 11 June 1996 (11.06.96) BE ② 9700344 15 April 1997 (15.04.97) BE (71) Applicant: UNILIN BEHEER B.V. [NL/NL]; Hoogeveen- weg 28, NL-2913 LV Nieuwerkerk aan de IJssel (NL). (72) Inventors: MORIAU, Stefan, Simon, Gustaaf, Koningin Fabi- olalaan 39, B-9000 Gent (BE); CAPPELLE, Mark, Gas- ton, Maurits; Cardijnlaan 8, B-8840 Staden (BE); THIERS, Bernard, Paul, Joseph; Stationsstraat 134, B-8780 Oostroze- beke (BE). (74) Agent: DONNÉ, Eddy; Bureau M.F.J. Bockstael N.V., Aren- bergstraat 13, B-2000 Antwerpen (BE).	(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (Utility model), DE, DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG , SI, SK, SK (Utility model), TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published With international search report. ✓ 1 appl'n. 3 INVS.	

(54) Title: FLOOR COVERING, CONSISTING OF HARD FLOOR PANELS AND METHOD FOR MANUFACTURING SUCH FLOOR PANELS

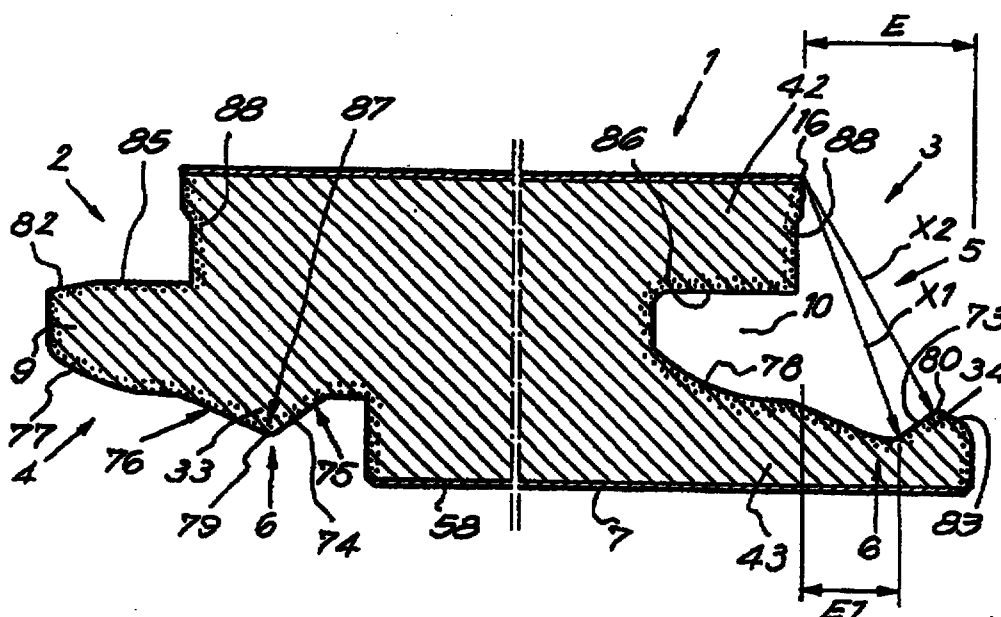

(57) Abstract

Floor covering, consisting of hard floor panels (1) which, at least at the edges of two opposite sides (2-3, 26-27), are provided with coupling parts (4-5, 28-29), cooperating with each other, substantially in the form of a tongue (9-31) and a groove (10-32), characterized in that the coupling parts (4-5, 28-29) are provided with integrated mechanical locking means (6) which prevent the drifting apart of two coupled floor panels into a direction (R) perpendicular to the related edges (2-3, 26-27) and parallel to the underside (7) of the coupled floor panels (1).