



(51) International Patent Classification:
H04W 24/08 (2009.01)

(21) International Application Number:
PCT/CN2024/130134

(22) International Filing Date:
06 November 2024 (06.11.2024)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
63/547,935 09 November 2023 (09.11.2023) US
18/593,234 01 March 2024 (01.03.2024) US

(71) Applicant: **HUAWEI TECHNOLOGIES CO., LTD.**
[CN/CN]; Huawei Administration Building, Bantian, Long-
gang District, Shenzhen, Guangdong 518129 (CN).

(72) Inventors: **XIN, Yan**; Huawei Administration Building,
Bantian, Longgang District, Shenzhen, Guangdong 518129
(CN). **AU, Kwok Shum**; Huawei Administration Building,
Bantian, Longgang District, Shenzhen, Guangdong 518129
(CN). **SUH, Jung Hoon**; Huawei Administration Building,
Bantian, Longgang District, Shenzhen, Guangdong 518129
(CN). **ABOUL-MAGD, Osama**; Huawei Administration

Building, Bantian, Longgang District, Shenzhen, Guang-
dong 518129 (CN).

(74) Agent: **SCIHEAD IP LAW FIRM**; Room 1508, Hui-
hua Commercial & Trade Building No.80, XianLie Zhong
Road, Yuexiu District, Guangzhou, Guangdong 510070
(CN).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CV, CZ, DE, DJ, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG,
KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY,
MA, MD, MG, MK, MN, MU, MW, MX, MY, MZ, NA,
NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO,
RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH,
TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS,
ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, CV,
GH, GM, KE, LR, LS, MW, MZ, NA, RW, SC, SD, SL, ST,
SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ,
RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ,

(54) Title: APPARATUS AND METHODS FOR MILLIMETER WAVE COORDINATED MONOSTATIC SENSING

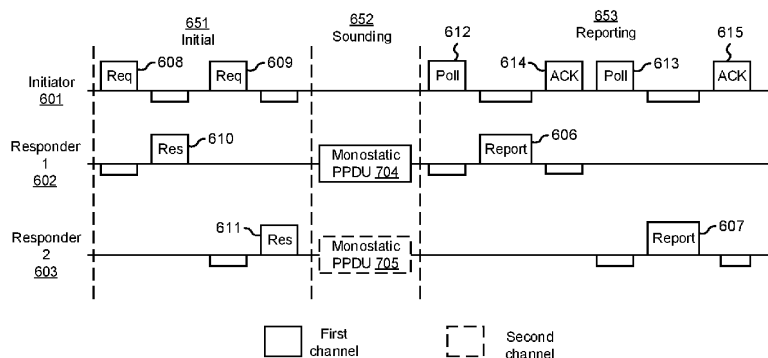


FIG. 7

(57) Abstract: Methods and apparatus for coordinated monostatic sensing are provided, for example in associated with IEEE 802.11 EDMG stations which simultaneously transmit monostatic sensing PPDU. DMG sensing request frames from a sensing initiator coordinate the sensing responders, and each frame includes a STA ID field, a Num of STAs in Exchange field and a BW field which are used to direct timing and channelization of the sensing PPDU. In some embodiments, IEEE 802.11 service periods are allocated for transmission operations such as simultaneous monostatic sensing PPDU on different channels, and related operations such as sensing request frames, sensing response frames, polls, reports, acknowledgments, etc. In some embodiments, IEEE 802.11 contention based access periods are used for the monostatic sensing. Responders determine whether or not they are recipient of a last sensing request frame and operate accordingly to transmit their monostatic sensing PPDU. Determination can be based on the STA ID field.

[Continued on next page]

DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT,
LU, LV, MC, ME, MK, MT, NL, NO, PL, PT, RO, RS, SE,
SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))