



- (51) **International Patent Classification:**
B63B 13/00 (2006.01) *B63B 21/04* (2006.01)
- (21) **International Application Number:**
PCT/EP2014/052781
- (22) **International Filing Date:**
13 February 2014 (13.02.2014)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
20130275 15 February 2013 (15.02.2013) NO
61/765,174 15 February 2013 (15.02.2013) US
- (71) **Applicant:** GVA CONSULTANTS AB [SE/SE]; P.O. Box 11450, S-404 29 Göteborg (SE).
- (72) **Inventor:** SCHLING, Martin; Jättekullsgatan 30, S-415 07 Göteborg (SE).
- (74) **Agent:** VALEA AB; Box 1098, S-405 23 Göteborg (SE).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

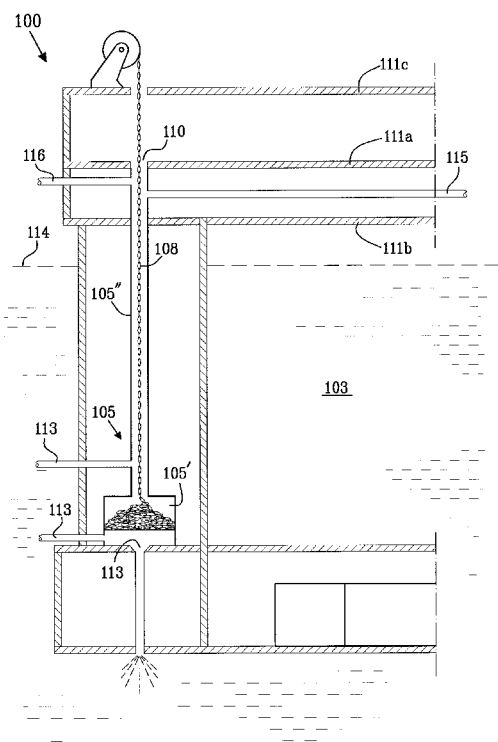
(54) **Title:** SYSTEM AND METHOD FOR DISCHARGING A WASTE FLUID

Fig. 1

(57) **Abstract:** The embodiments herein relate to a system for discharging a waste fluid from a floating unit (100) adapted to float in a body of water (103). The system is adapted to discharge said waste fluid to said body of water (103) surrounding the floating unit (100). The system comprises a mooring line compartment (105) adapted to accommodate at least part of a mooring line (108) for the floating unit (100) and a discharge portion (115) adapted to discharge the waste fluid into the mooring line compartment (105). The system comprises an outlet (113) adapted to discharge the waste fluid from the mooring line compartment (105) to the body of water (103).