



(51) International Patent Classification:
G10L 19/008 (2013.01) *H04S 7/00* (2006.01)

(21) International Application Number:
PCT/EP2023/069391

(22) International Filing Date:
12 July 2023 (12.07.2023)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
PCT/EP2022/069522
12 July 2022 (12.07.2022) EP

(71) Applicant: **FRAUNHOFER-GESELLSCHAFT ZUR
FÖRDERUNG DER ANGEWANDTEN FORSCHUNG
E.V.** [DE/DE]; Hansastraße 27c, 80686 München (DE).

(72) Inventor: **BORSS, Christian**; c/o Fraunhofer-Institut für
Integrierte Schaltungen IIS, Am Wolfsmantel 33, 91058 Er-
langen (DE).

(74) Agent: **SCHAIRER, Oliver** et al.; Schoppe, Zimmermann,
Stöckeler, Zinkler, Schenk & Partner mbB, Radlkoferstr. 2,
81373 München (DE).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CV, CZ, DE, DJ, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG,
KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY,
MA, MD, MG, MK, MN, MU, MW, MX, MY, MZ, NA,
NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO,
RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH,

(54) Title: APPARATUS AND METHOD FOR ENCODING OR DECODING OF PRECOMPUTED DATA FOR RENDERING
EARLY REFLECTIONS IN AR/VR SYSTEMS

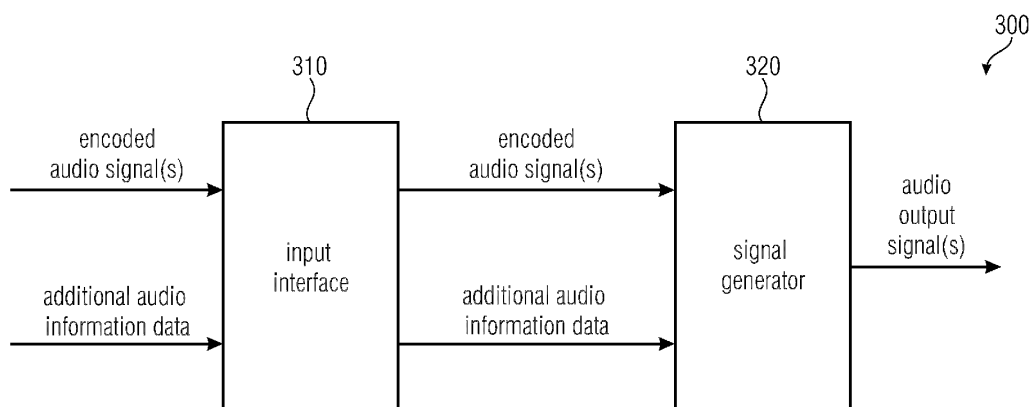


Fig. 9

(57) Abstract: An apparatus (300) for generating one or more audio output signals from one or more encoded audio signals according to an embodiment is provided. The apparatus (300) comprises an input interface (310) for receiving the one or more encoded audio signals and for receiving additional audio information data. Furthermore, the apparatus (300) comprises a signal generator (320) for generating the one or more audio output signals depending on the encoded audio signals and depending on second additional audio information. The signal generator (320) is configured to obtain the second additional audio information using the additional audio information data and using first additional audio information, if the additional audio information data exhibits a redundancy state. Moreover, the signal generator (320) is configured to obtain the second additional audio information using the additional audio information data without using the first additional audio information, if the additional audio information data exhibits a non-redundancy state.

[Continued on next page]

TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS,
ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, CV, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SC, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, ME, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))
