



- (51) **International Patent Classification:**
E05B 63/20 (2006.01) *E05B 65/44* (2006.01)
B64D 11/04 (2006.01)
- (21) **International Application Number:**
PCT/NL2013/050549
- (22) **International Filing Date:**
23 July 2013 (23.07.2013)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
2009218 23 July 2012 (23.07.2012) NL
- (71) **Applicant:** DRIESSEN AEROSPACE GROUP N.V.
[NL/NL]; Toermalijnstraat 16, NL-1812 RL Alkmaar (NL).
- (72) **Inventor:** PORTEGIES, Cornelis Petrus Maria; Hoefje
20, NL-1733 AC Nieuwe Niedorp (NL).
- (74) **Agent:** DE BOER, Henk; Nederlandsch Octrooibureau,
J.W. Frisolaan 13, NL-2517 JS The Hague (NL).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

- (54) **Title:** LOCKING MECHANISM FOR A GALLEY CONTAINER AND GALLEY CONTAINER PROVIDED WITH A LOCKING MECHANISM

Fig. 2

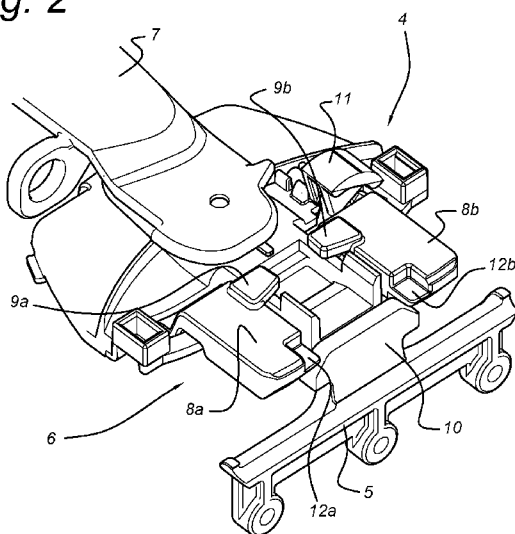

- (57) **Abstract:** The invention relates to a locking assembly for a galley container comprising: a picklock arranged on a first galley container part, a locking mechanism arranged on a second galley container part for engaging the picklock, the first and second galley container parts being moveable towards and away from each other to close and open the galley container, the locking mechanism being moveable between a release position, wherein the picklock is released from the locking mechanism, and a lock position wherein the locking mechanism can engage the picklock to lock the first container part to the second container part, characterized in that a blocking element is provided that in a block position prevents the locking mechanism from moving to the lock position and in an unblock position allows the locking mechanism to move to the lock position. Another aspect of the invention relates to a galley container provided with such a locking assembly.