

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
19 April 2007 (19.04.2007)

PCT

(10) International Publication Number
WO 2007/041803 A1

(51) International Patent Classification:

A44B 11/25 (2006.01) A45F 3/14 (2006.01)
A45F 5/00 (2006.01) A45C 1/04 (2006.01)

(21) International Application Number:

PCT/AU2006/001517

(22) International Filing Date: 13 October 2006 (13.10.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

2005905681 14 October 2005 (14.10.2005) AU

(71) Applicant and

(72) Inventor: LARUCCIA, John [AU/AU]; 373 Summerlakes Parade, Ballajura, Western Australia 6066 (AU).

(74) Agent: WRAY & ASSOCIATES; Level 4, The Quadrant, 1 William Street, Perth, Western Australia 6000 (AU).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.



(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: CONNECTOR, HOUSING AND BELT

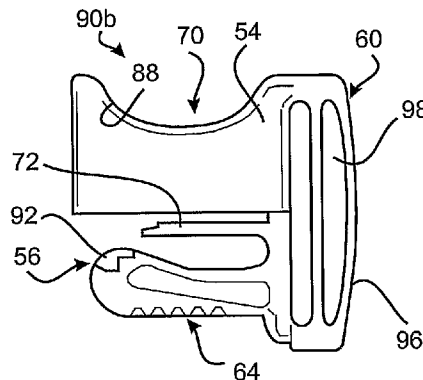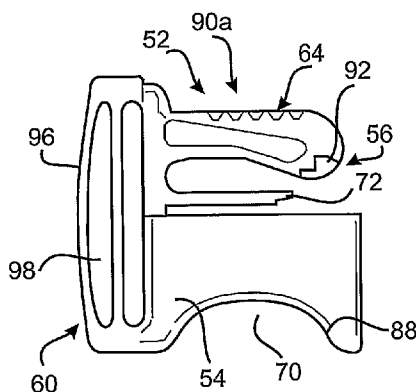

(57) Abstract: A connector (90) consists of a first connector component (52) and a second connector component (54) and an engagement mechanism (56, 58). A first connector component (52) and a second connector component (54) of a first connector (90a) are releasably engageable with a second connector component (54) and a first connector component (52) of a second connector (90b). In this way the first connector (90a) and the second connector (90b) are releasably connectable. The connector (90) of the present invention is releasably connectable with another like connector (90).