

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
12 March 2009 (12.03.2009)

PCT

(10) International Publication Number
WO 2009/032771 A4

(51) International Patent Classification:
B65D 83/00 (2006.01) **B67D 5/02** (2006.01)

(21) International Application Number:
PCT/US2008/074664

(22) International Filing Date: 28 August 2008 (28.08.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/968,510 28 August 2007 (28.08.2007) US
60/992,292 4 December 2007 (04.12.2007) US
61/025,547 1 February 2008 (01.02.2008) US
61/068,030 4 March 2008 (04.03.2008) US

(71) Applicant (for all designated States except US): **ENTE-GRIS, INC.** [US/US]; 3500 Lyman Boulevard, Chaska, MN 55318 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **LEYS, John, A.** [US/US]; 9325 Pierson Lake Drive, Chaska, MN 55318

(US). **HENNEN, John, M.** [US/US]; 736 Debbie Lane, Carver, MN 55315 (US). **JOHNSON, Michael, L.** [US/US]; 5514 Edgewater Boulevard, Minneapolis, MN 55417 (US).


(74) Agents: **CHRISTENSEN, Douglas, J.** et al.; Patterson, Thuente, Skaar & Christensen, P.A., 4800 IDS Center, 80 South Eighth Street, Minneapolis, MN 55402-2100 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH,

[Continued on next page]

(54) Title: METHOD AND APPARATUS FOR DISPENSING FLUIDS

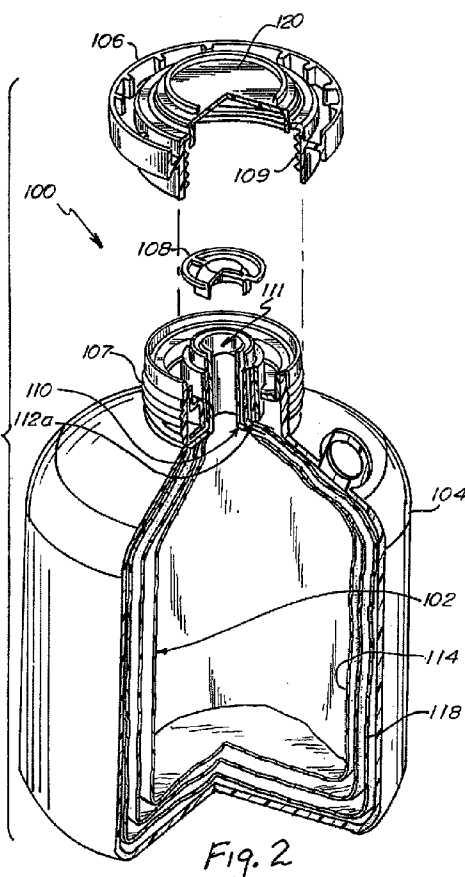

(57) Abstract: A bag-in-bag-in-bottle assembly formed by a flexible dispensing container with a dispensing fitment. The dispensing container is positioned adjacent or sandwiched between one or more flexible pressurization containers having a separate inlet/outlet path through a second fitment. The bag-in-bag assembly can then be placed in a containment vessel with the fitments mounted such that it is accessible on the vessel. A liquid can be extracted from the dispensing container by introducing a fluid into the pressurization container(s) with enough pressure to force the liquid out through the dispensing fitment. A contoured dispensing head may be coupled to the bag-in-bag-in-bottle assembly using a cam actuation arrangement for simultaneously locking the pressurization, vent and fluid extraction couplings. A key code system may be utilized wherein a universal key code ring is modified to enable key coding of the containment vessel for compatibility with only certain dispense heads.



GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(88) Date of publication of the international search report:
14 May 2009

Date of publication of the international search report:
9 July 2009

Published:

— *with international search report*