

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
19 September 2002 (19.09.2002)

PCT

(10) International Publication Number
WO 02/073080 A1

(51) International Patent Classification⁷: **F16L 55/10**,
55/105, 55/12, 55/124

(21) International Application Number: PCT/AU02/00281

(22) International Filing Date: 13 March 2002 (13.03.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
PCT/AU01/00279 14 March 2001 (14.03.2001) AU

(71) Applicants (*for all designated States except US*): **YARRA VALLEY WATER** [AU/AU]; Private Bag 1, Lucknow Street, Mitcham, Victoria 3132 (AU). **WANG INDUSTRIES PTY LTD** [AU/AU]; 8 Weir Street, Glen Iris, Victoria 3146 (AU).

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **BURLOCK, Richard** [AU/AU]; 19 Clearwater Drive, Lilydale, Victoria 3140 (AU). **EVANS, Craig** [AU/AU]; 77 Sutherland Road, Armadale, Victoria 3143 (AU).


(74) Agent: **FB RICE & CO**; PO Box 668, 139-141 Rathdowne Street, Carlton, Victoria 3053 (AU).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),

[Continued on next page]

(54) Title: IMPROVED PIPELINE ISOLATING DEVICE

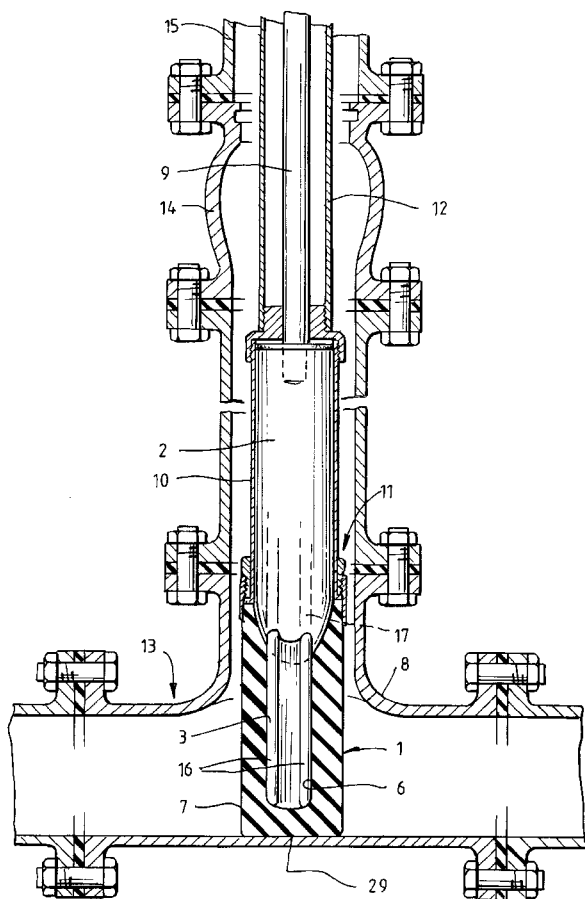

(57) Abstract: A pipeline isolating device for installation into and occlusion of a pressurised liquid or fluid supply pipe comprising a substantially solid and deformable boot (1) which is adapted to move between an expanded and an unexpanded state and a shaped plunger (2) adapted to move into and out of said boot (1) wherein the boot (1) has a hollow interior (3) with a displacement contour (6) adapted to receive and cooperate with said plunger (2) so as to cause said boot (1) to move between said expanded state when the plunger (2) is inserted into said hollow interior (3) of the boot (1) and said unexpanded state when said plunger (2) is withdrawn from the interior (3) of the boot (1).



WO 02/073080 A1



Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR,
GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent
(BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR,
NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*