

08 NOV 2004

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

162162

(43) International Publication Date
4 December 2003 (04.12.2003)

PCT

(10) International Publication Number
WO 03/101157 A1(51) International Patent Classification⁷: H05B 33/22

(21) International Application Number: PCT/US03/14590

(22) International Filing Date: 8 May 2003 (08.05.2003)

(25) Filing Language: English

(26) Publication Language: English


(30) Priority Data:
60/379,141 8 May 2002 (08.05.2002) US(71) Applicant: ZEOLUX CORPORATION [US/US]; 704
228th Street, Sammamish, WA 98704 (US).(72) Inventors: MAGNO, John N.; 7 Renier Court, Middle-
town, NJ 07748 (US). KOCH, Gene C.; 85 Ceder Run
Road, Bayville, NJ 08721 (US).(74) Agents: PARK, Eunhee et al.; Baker & McKenzie, 805
Third Avenue, New York, NY 10022 (US).(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD,
SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ,
VC, VN, YU, ZA, ZM, ZW.(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: LIGHTING DEVICES USING FEEDBACK ENHANCED LIGHT EMITTING DIODE

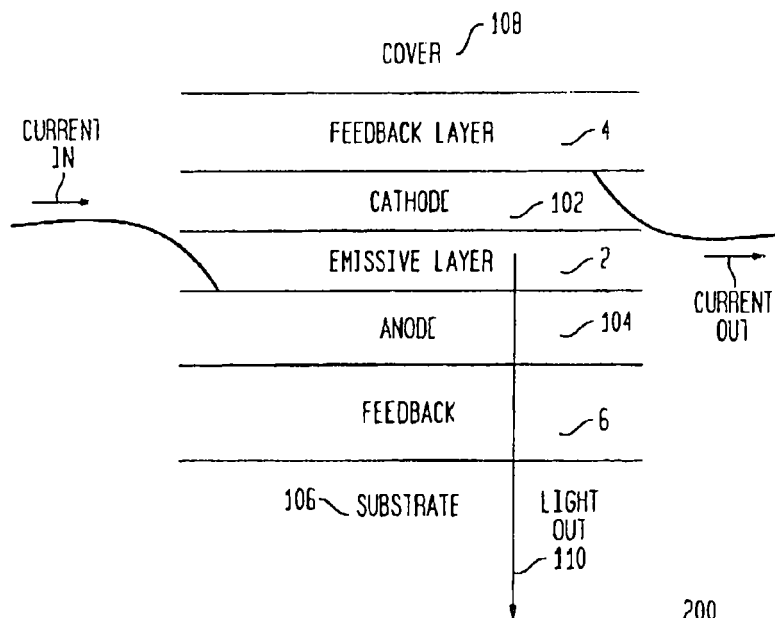

(57) Abstract: Lighting devices (200) using feedback-enhanced luminescent devices are disclosed. The position of the cathode (102) and the anode (104) may be interchanged. The device also may include a substrate (106) placed adjacent to the bottom feedback layer (106). A light emitting diode disposed between feedback elements (FE-LED) may be used as a light emitting element in the lighting devices. The light emitting element may be coupled to a light distribution element. In one aspect, the light emitting diode may be an organic light emitting diode (FE-OLED).

WO 03/101157 A1



ACTION