

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
21 May 2004 (21.05.2004)

PCT

(10) International Publication Number
WO 2004/041704 A1

(51) International Patent Classification⁷: **B66B 11/08**

Jorma [FI/FI]; Raivaajantie 13, FIN-05620 Hyvinkää (FI).
AULANKO, Esko [FI/FI]; Käenkatu 6 C 33, FIN-04230
Kerava (FI).

(21) International Application Number:
PCT/FI2003/000713

(74) Agent: **KONE CORPORATION/PATENT DEPART-
MENT**; P.O. Box 677, FIN-05801 Hyvinkää (FI).

(22) International Filing Date: 1 October 2003 (01.10.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
20021959 4 November 2002 (04.11.2002) FI

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE,
GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR,
KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK,
MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT,
RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(71) Applicant (*for all designated States except US*): **KONE
CORPORATION** [FI/FI]; Kartanontie 1, FIN-00330
Helsinki (FI).


(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **MUSTALAHTI,**

[Continued on next page]

(54) Title: ELEVATOR

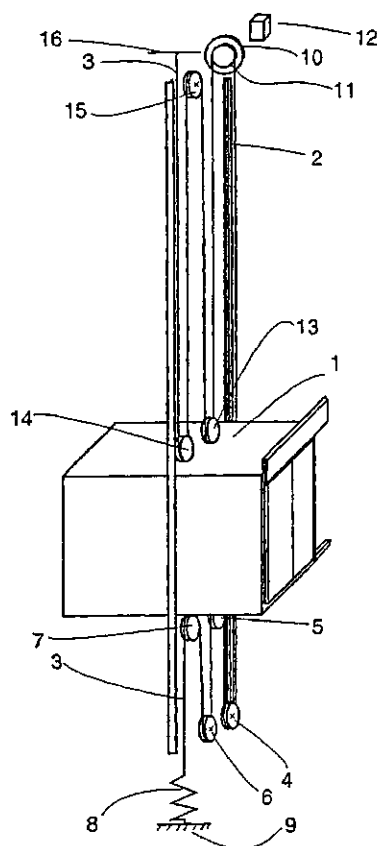

(57) Abstract: An elevator, preferably an elevator without machine room, in which the hoisting machine (10) engages the hoisting ropes (3) by means of a traction sheave (11), the elevator car (1) being at least partially supported by the hoisting ropes serving as a means of moving the elevator car (1). The elevator car is suspended on the hoisting ropes (3) by means of at least one diverting pulley (13, 14) from whose rim the hoisting ropes go upwards from both sides and at least one diverting pulley (7, 5) from whose rim the hoisting ropes go downwards from both sides of the diverting pulley. The traction sheave (11) engages the rope portion between these diverting pulleys (13, 5).



SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*