

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
4 December 2003 (04.12.2003)

PCT

(10) International Publication Number
WO 03/099689 A1

(51) International Patent Classification⁷: **B65G 65/00**,
69/02, B65D 19/40

(21) International Application Number: PCT/SE03/00861

(22) International Filing Date: 27 May 2003 (27.05.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0201592-3 28 May 2002 (28.05.2002) SE

(71) Applicant (for all designated States except US): **INTER
IKEA SYSTEMS B.V.** [NL/NL]; Olof Palmestraat 1,
NL-2616 LN Delft (NL).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **DICKNER, Allan**
[SE/SE]; Storkstigen 16, S-343 35 Ålmhult (SE).

(74) Agent: **STRÖM & GULLIKSSON IPC AB**; Box 4188,
S-203 13 Malmö (SE).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: A METHOD OF TRANSPORTING UNIT LOADS

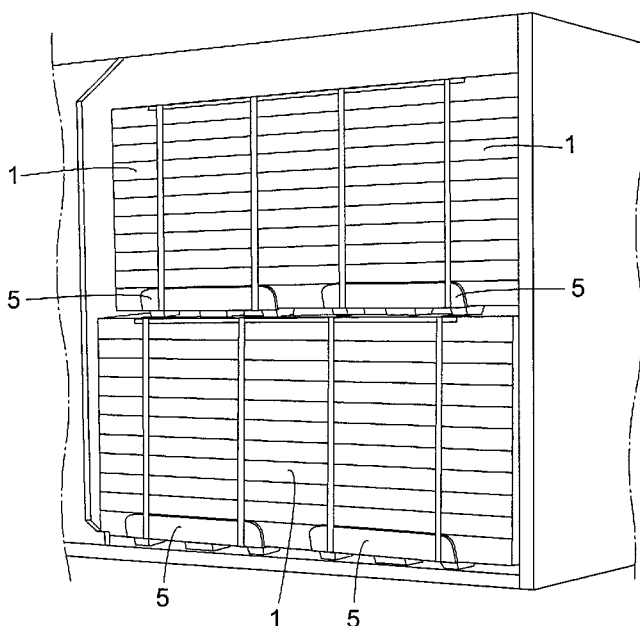

(57) **Abstract:** Unit loads (1) can be transported on an area having a certain length and width, the area for example being the bottom of a standardized container or a loading compartment of a railway goods wagon. In order to improve the filling rate and to obviate damages to the transported goods, the respective lengths and widths of the unit loads to be transported are adjusted to together correspond to the length and width of the area. Further, each unit load is placed on two or more loading ledges (5), each ledge comprising an L-shaped profile having projections (7) for supporting the unit load at a certain distance over its support and being positioned at a lower edge of the unit load.



WO 03/099689 A1