

Through-tubing lateral re-entry

The present invention relates to through-tubing lateral re-entry, by which is meant the ability to enter an existing lateral offshoot from a main borehole without removal of downstream completion tubing from the main borehole.

The need for such an ability has arisen because of the increasingly common practice of improving well output by drilling a lateral bore, or more often multiple lateral bores, from a common main borehole in order to gain access to different levels or zones of an oil or gas reservoir.

Typically, the main borehole, at least in the region of the multi-lateral offshoots, can be deviated from the vertical plane or even horizontal, and the multi-lateral offshoots can themselves be deviated from the vertical plane or even horizontal.

This means that the well needs to be serviced by coiled tube technology relying on hydraulics, rather than by traditional wireline technology relying on gravity.

It is known for a lateral bore to be drilled by providing a steel liner for the main borehole with a window which is closed by a softer material such as fibreglass. The liner is also provided upstream of the window with a latch down collar having an orienting device. Using conventional drilling technology, the steel liner is lowered into position and then fixed in position by cement, with the window facing in a predetermined direction.

A whipstock is run down through the liner until an orienting device on the whipstock locates with the orienting device on the liner to latch and hold the whipstock at a desired orientation.

Next, a drill string is run down through the liner and is deflected by the whipstock to drill through the softer material closing the window before drilling into the surrounding stratum. After the lateral bore has been drilled, the drill string is withdrawn and then the

whipstock is retrieved leaving the latch down collar with its orienting device. Finally, conventional completion tubing is run down through the main borehole to a desired position downstream of the lateral bore.

- 5 There are a number of reasons why it would be desirable to be able to re-enter a selected lateral bore after it has been drilled.

For example, there may be a wish for a particular lateral bore to be:-

- 10 a) plugged and isolated from the main borehole;
 b) acid washed or stimulated to remove unwanted mud from the lateral bore or the surrounding stratum;
 c) subjected to logging to give a series of
15 readings indicating the presence or absence of oil or water; or
 d) controlled by opening or closing a device, such as a slotted supporting sleeve, at an interface of the lateral bore and the surrounding stratum.

- 20 There are also, however, a number of reasons why it would not be desirable to remove the downstream completion tubing - not only does the downstream completion tubing protect the main borehole casing from corrosive well fluids and provide total control over the well fluids, but removal
25 in a so-called workover can cost up to \$1,000,000.

It has recently been proposed that a special small diameter whipstock be deployed through the completion tubing and then oriented directly in the large diameter liner to allow through-tubing lateral re-entry.

- 30 According to one aspect of the present invention, however, a method is provided for allowing entry of an existing lateral offshoot from a main borehole, without
~~removal of downstream completion tubing from the main~~
borehole, comprising the use of both a liner and a
35 whipstock inserted through the completion tubing to a position within the liner, characterised in that an intermediate device has been provided which, in use, is

located between the liner and the whipstock so that the whipstock merely needs to locate with the intermediate device rather than the liner.

Other aspects of the present invention reside in the provision of an intermediate device for use in the method and of a well assembly resulting from use of the method.

Such an intermediate device needs to be located in the liner before the completion tubing is located in the liner, and a separate intermediate device needs to be associated with each of the lateral bores for which re-entry is to be required.

Nevertheless, an advantage of the present invention is that the whipstock can be of a simple construction, because it merely needs to locate with the intermediate device, whose inner diameter can be chosen to be compatible with that of the completion tubing, rather than needing to locate with the much larger inner diameter of the liner.

A further advantage of the present invention, when there are multi-lateral offshoots, is that the whipstock can be arranged to recognise each of the intermediate devices sequentially, and locate with just a pre-selected intermediate device to provide access to a pre-selected lateral offshoot.

Preferably, in order to avoid potential disruption caused by running tool snagging at bends and kinks, the intermediate device has a passageway extending linearly therethrough.

Indeed, the intermediate device is preferably in the form of a hollow sleeve. It may be locatable by packers and orientable by a gyroscope. Preferably, however, the intermediate device has locating, latching and orienting components for co-operation with complementary components provided by the liner.

The liner may also be provided with a protrusion, such as a polished liner nipple, upstream of its window for sealing abutment with the outside of the intermediate device. Preferably, however, the liner is also provided

with a similar protrusion downstream of its window, for sealing abutment with the outside of the intermediate device. Thus, the intermediate device needs to be itself provided with a window.

5 The above-noted orientation ensures that the window in the intermediate device is aligned with the window in the liner.

Preferably, the whipstock has locating, latching and orienting components for co-operation with complementary
10 components provided by the intermediate device.

As already indicated, the whipstock is adapted to recognise each of the intermediate devices sequentially to enable locating, latching and orienting with just a pre-selected intermediate device to provide access to a pre-
15 selected lateral offshoot.

Indeed, said recognition preferably involves the use of locator keys of different profile rather than passageways of different diameter. The locator keys on the whipstock can stop and latch out when they see a matching
20 profile on the intermediate device. By avoiding the use of passageways of progressively decreasing diameter, there are no restrictions on the number of intermediate devices before running tool progress through the passageways is blocked.

25 The locating, latching and orienting components provided by the whipstock can all be of known type including, in addition to the locator keys, a trigger for moving along a helix presented by the intermediate device to orient the deflecting surface of the whipstock, which
30 can also have a known type of releasable connection with the running tool.

The intermediate device preferably also has parts thereof adapted for co-operation with plugs and an isolation sleeve to enable the lateral offshoot to be
35 sealed off from the main borehole.

An example of through-tubing lateral re-entry according to the present invention is shown in the accompanying drawings wherein:-

Figure 1 shows a typical oil well completion with two lateral bores;

Figure 2 shows an intermediate device associated with one of the lateral bores of Figure 1; and

Figure 3 shows a whipstock associated with the intermediate device of Figure 2.

In the accompanying drawings, conventional completion tubing 10 is shown extending through a main borehole casing 12 into a liner 14 from which extend two lateral bores 16a, 16b.

Although the liner 14 is shown in a vertical position in Figure 1 it is more likely in practice to extend horizontally.

As shown in Figure 2, an intermediate device 18 is located in the liner 14 opposite the lateral bore 16b. The liner 14 is formed with a pair of inwardly projecting protrusions 20a for abutment with complementary parts 20b of the intermediate device 18. The intermediate device 18 is also formed with a window 22 as well as a lower (upstream) locating, latching and orienting device 24 for co-operation with a latch down collar and orienting device 26 provided by the liner 14.

A whipstock 28 can be pushed by coiled tubing, acting as a running tool, through the completion tubing 10 and into the lower end of the intermediate device 18. The whipstock 28 can now be located, latched and oriented by co-operation of complementary components provided by the whipstock 28 and the intermediate device 18 when the coiled tubing is pulled upwards.

It will be appreciated that it is now possible for further operating equipment to be run through the completion tubing 10 and be deflected by the whipstock 28 thereby achieving through-tubing lateral re-entry.

CLAIMS

1. A method for allowing entry of an existing lateral offshoot from a main borehole, without removal of
5 downstream completion tubing from the main borehole, comprising the use of both a liner (14) and a whipstock (28) inserted through the completion tubing (10) to a position within the liner (14), characterised in that an intermediate device (18) has been provided which, in use,
10 is located between the liner (14) and the whipstock (28) so that the whipstock (28) merely needs to locate with the intermediate device (18) rather than the liner (14).
2. A method according to claim 1, characterised in that the intermediate device (18) is a hollow sleeve having a
15 window (22) positioned between a deflecting surface of the whipstock (28) and an associated window through the liner (14).
3. A method according to claim 1 or claim 2, characterised in that the intermediate device (18) has at
20 least one part (20b) thereof adapted for sealing abutment with a protrusion (20a) projecting inwardly of the liner (14).
4. A method according to any preceding claim, characterised in that the intermediate device (18) has
25 parts thereof adapted for co-operation with plugs and an isolation sleeve to enable the lateral offshoot to be sealed off from the main borehole.
5. A method according to any preceding claim, characterised in that the intermediate device (18) has
30 locating, latching and orienting components (24) for co-operation with complementary components (26) provided by the liner (14).
6. A method according to any preceding claim, characterised in that the intermediate device (18) has a
35 passageway extending linearly therethrough.
7. A method according to any preceding claim, characterised in that the whipstock (28) has locating,



latching and orienting components for co-operation with complementary components provided by the intermediate device (18).


5 8. A method according to any preceding claim, characterised in that a separate intermediate device (18) is provided for each of a plurality of lateral offshoots (16a, 16b).

9. A method according to claim 7 and claim 8, characterised in that the whipstock (28) is adapted to
10 recognise each of the intermediate devices (18) sequentially to enable locating, latching and orienting with just a pre-selected intermediate device (18) to provide access to a pre-selected lateral offshoot (16a, 16b).

15 10. A method according to claim 6 and claim 9, characterised in that said recognition involves the use of locator keys of different profile rather than passageways of different diameter.

20 11. An intermediate device having constructional features to permit use in a method according to any one of claims 1 to 10.

12. A well assembly, having a lateral offshoot from a main borehole, which contains completion tubing (10), a liner (14) and a whipstock (28), characterised in that an
25 intermediate device (18) is located between the liner (14) and the whipstock (28) as a result of following a method according to any one of claims 1 to 10.

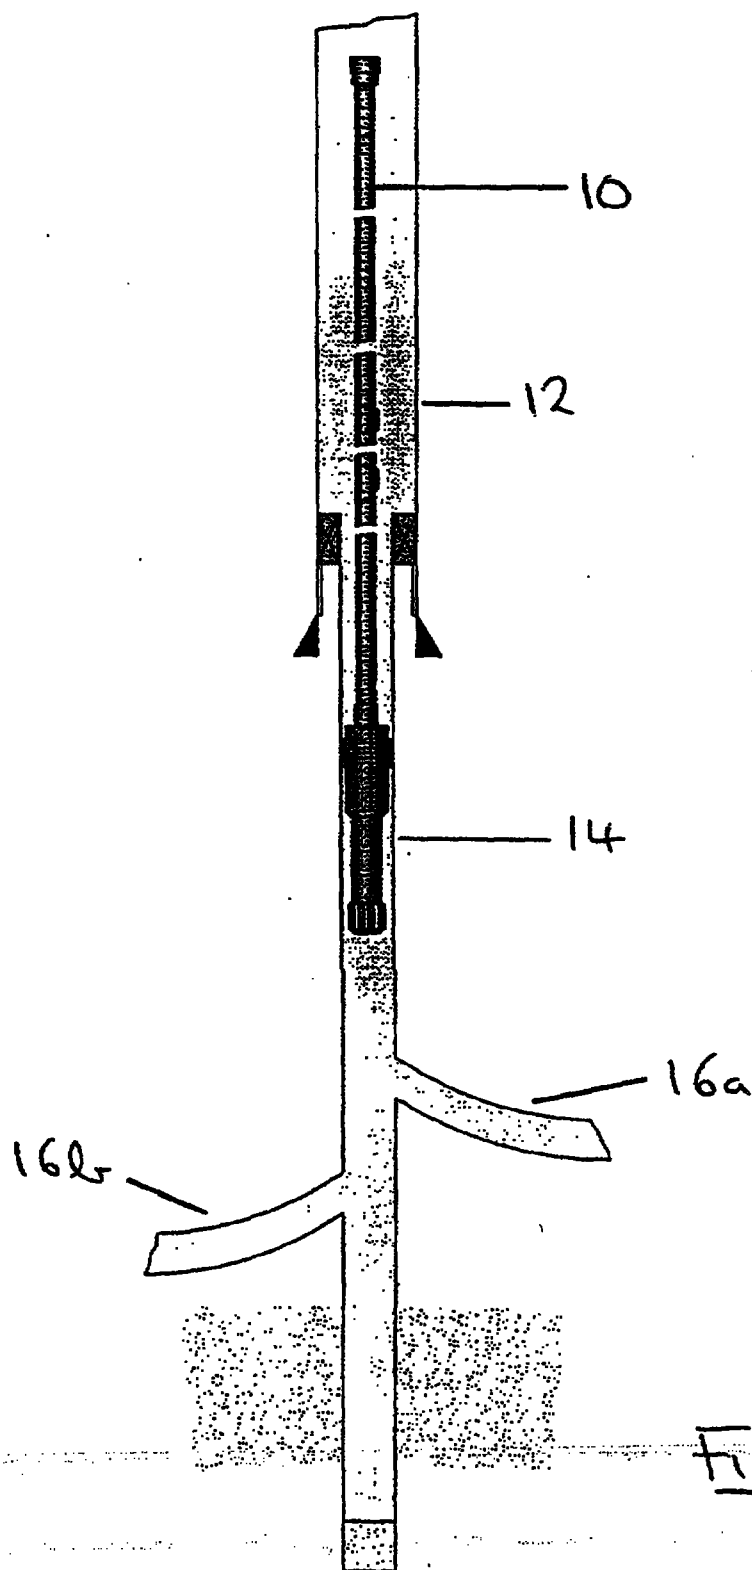

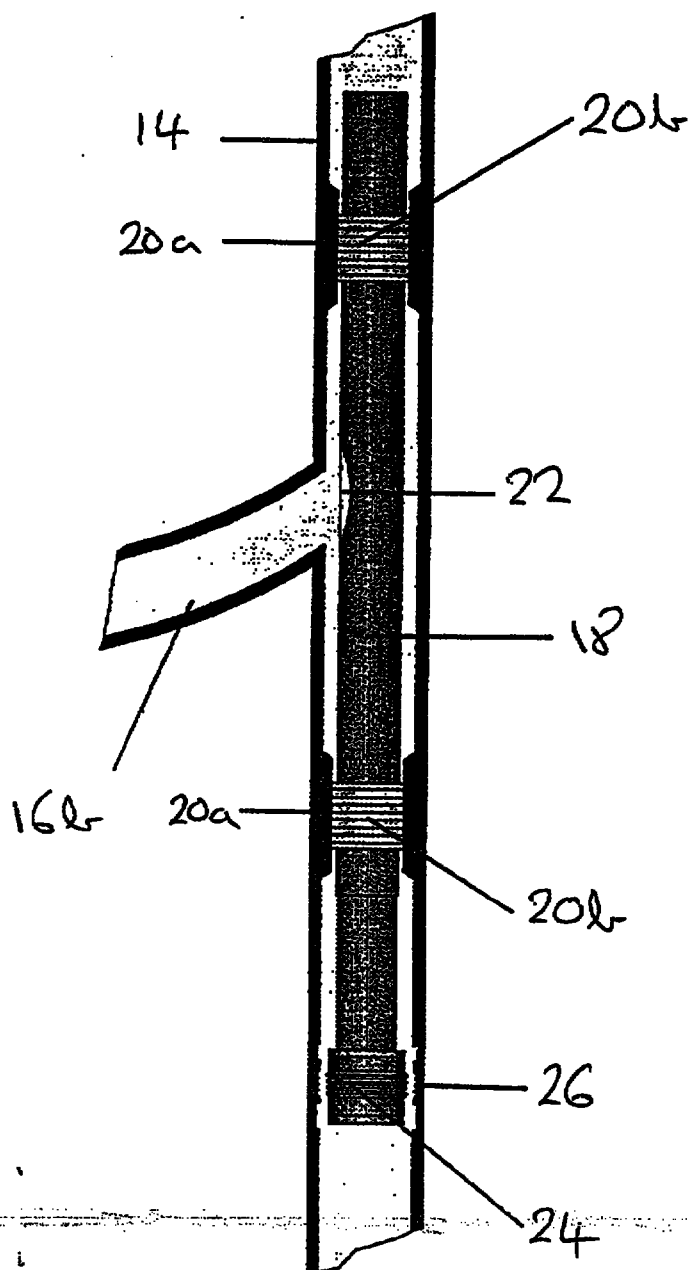


Fig. 2

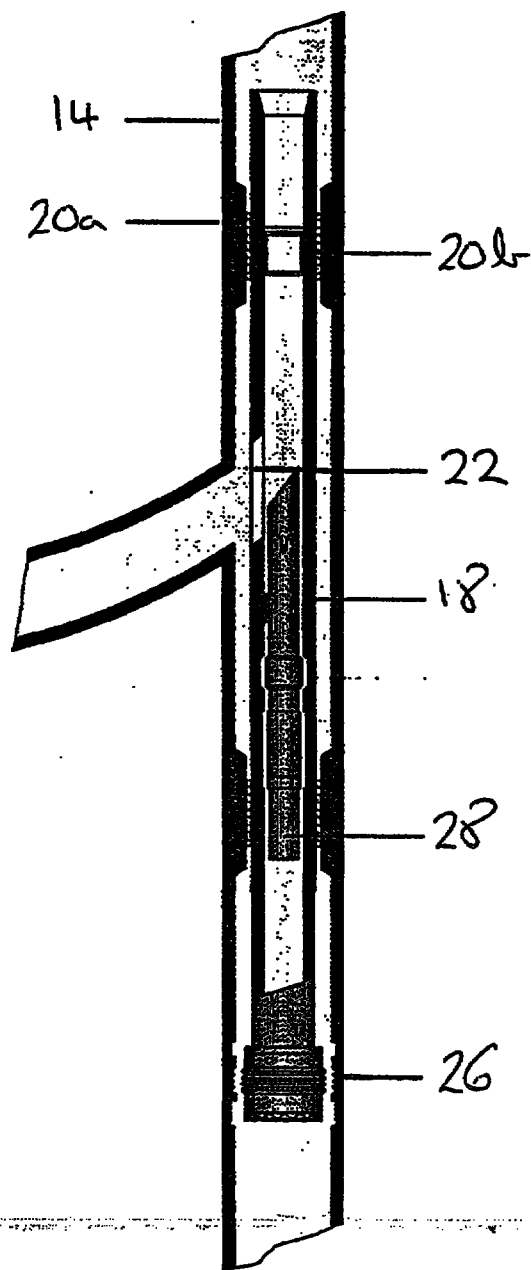



Fig. 3

9801949-0

PCT

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification⁶ : E21B 7/06, 43/30	A1	(11) International Publication Number: WO 97/07318 (43) International Publication Date: 27 February 1997 (27.02.97)
(21) International Application Number: PCT/GB96/01978 (22) International Filing Date: 13 August 1996 (13.08.96) (30) Priority Data: 9516632.8 14 August 1995 (14.08.95) GB (71) Applicant (for all designated States except US): PRESSURE CONTROL ENGINEERING LIMITED [GB/GB]; Badentoy Avenue, Badentoy Park, Portlethen, Aberdeen, Grampian AB12 4YB (GB). (72) Inventors; and (75) Inventors/Applicants (for US only): MORRELL, Terence, Robert [GB/GB]; The Old Manse, North Street, Wareham, Dorset BH20 4AG (GB). NORRIS, Robert, Martin [GB/GB]; 89 Northmoor Way, Wareham, Dorset BH20 4EG (GB). (74) Agent: GILL JENNINGS & EVERY; Broadgate House, 7 Eldon Street, London EC2M 7LH (GB).		(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published With international search report.
(54) Title: THROUGH-TUBING LATERAL RE-ENTRY (57) Abstract A method for allowing entry of an existing lateral offshoot from a main borehole, without removal of downstream completion tubing from the main borehole, comprising the use of both a liner (14) and a whipstock (28) inserted through the completion tubing (10) to a position within the liner (14), characterised in that an intermediate device (18) has been provided which, in use, is located between the liner (14) and the whipstock (28) so that the whipstock (28) merely needs to locate with the intermediate device (18) rather than the liner (14), the intermediate device (18) preferably having a passageway extending linearly therethrough, and the whipstock (28) preferably being provided with locator keys which are of different profile for different intermediate devices (18).		