9705739-2
IPOS

PCT WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : G06F 13/00

A1

(11) International Publication Number: WO 97/33229

(43) International Publication Date: 12 September 1997 (12.09.97)

(21) International Application Number: PCT/US97/03786

(22) International Filing Date: 7 March 1997 (07.03.97)

(30) Priority Data:
08/613,080 8 March 1996 (08.03.96) US

(71) Applicant: MYLEX CORPORATION [US/US]; 34551 Ardenwood Boulevard, Fremont, CA 94555 (US).


(72) Inventors: LIONG, Thomas, Singkiat; 1112 Casaba Creek Court, San Jose, CA 95120 (US). NAGARAJ, Ashwath; 33701 Whimbel Road, Fremont, CA 94555 (US). RAO, Krishnakumar; 32875 Bluebird Court, Fremont, CA 94555 (US).

(74) Agents: BOROVOY, Roger, S. et al.; Fish & Richardson P.C., Suite 100, 2200 Sand Hill Road, Menlo Park, CA 94025 (US).

(81) Designated States: AU, BR, CA, JP, KR, MX, SG, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

Published
With international search report.
Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(54) Title: A MODULAR MIRRORED CACHE MEMORY BATTERY BACKUP SYSTEM

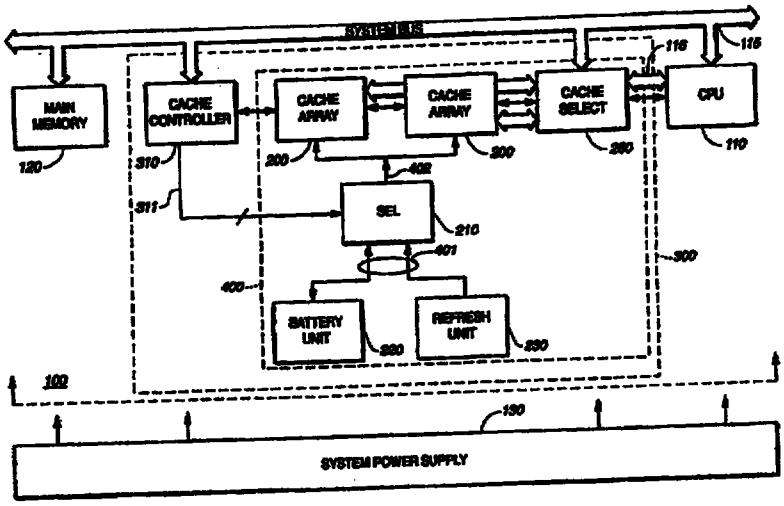

(57) Abstract

A battery backup mirrored cache memory module (210) for a cache dynamic random access memory (DRAM (200)) system that senses the V^{cc} level supplied through the cache controller (310) to the cache memory and, if the cache controller supplied V^{cc} falls below a preset threshold level, the battery backup apparatus (400) switches (210) the cache memory array to a backup battery V^{cc} source (220). and a backup refresh control generator unit (230) that is also powered by the backup battery V^{cc} source (220). The cache DRAM (200), backup battery (220), and backup refresh generator are physically contained in a single module (400) that can be disconnected from the cache controller and host while preserving cache memory contents. The backup system is installed in an operating system for recovery of the cache memory contents and/or resumption of execution of the program that was running when the V^{cc} power failure occurred.