

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
2 February 2006 (02.02.2006)

PCT

(10) International Publication Number
WO 2006/011808 A2

(51) International Patent Classification: Not classified

(21) International Application Number:
PCT/NO2005/000280

(22) International Filing Date: 28 July 2005 (28.07.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
20043203 28 July 2004 (28.07.2004) NO

(71) Applicant (for all designated States except US): **RKG HOLDING AS** [NO/NO]; Lønborglien 284, N-5039 Bergen (NO).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **SØRBY, Reidar** [NO/NO]; Lønborglien 284, N-5039 Bergen (NO).

(74) Agents: **ONSAGERS AS** et al.; P.O.Box 6963 St. Olavs plass, N-0130 Oslo (NO).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: A MOTOR DRIVEN BY PRESSURE MEDIUM SUPPLIED FROM AN EXTERNAL PRESSURE SOURCE

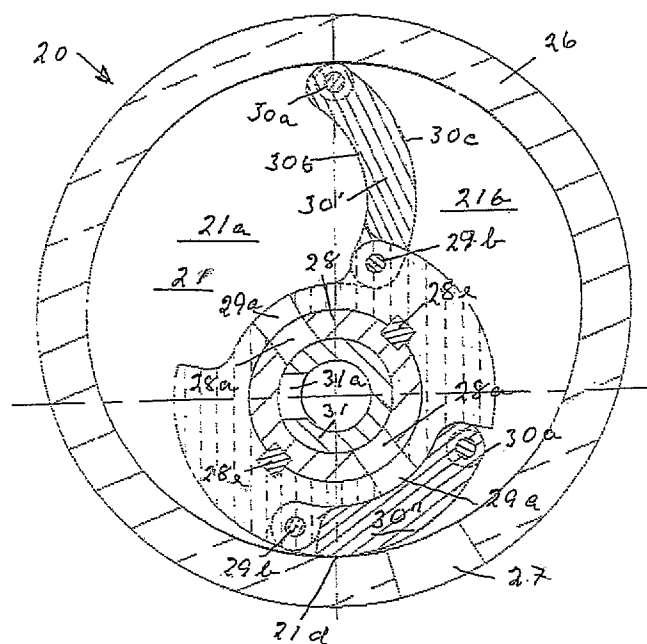

(57) Abstract: A motor (20) is driven by pressure medium delivered from an external pressure source. A rotor part (28) forms sealing abutment against a local area (21d) of the motor's (20) cylindrical inner wall (21c). A piston-forming plate part (30) is pivot-mounted at one end to the rotor part (28) and can be pivoted forwards and backwards in the motor casing's working chamber (21) relative to the rotor part (28). At the same time at its opposite end the piston-forming plate part (30) forms sealing abutment along the motor casing's (26) circular inner wall (21c).

WO 2006/011808 A2