



(51) International Patent Classification:

B01F 15/00 (2006.01) **B01F 7/22** (2006.01)
A01C 3/02 (2006.01) **C02F 11/04** (2006.01)
B01F 7/16 (2006.01) **C12M 1/107** (2006.01)

(21) International Application Number:

PCT/SE2011/050334

(22) International Filing Date:

24 March 2011 (24.03.2011)

(25) Filing Language:

Swedish

(26) Publication Language:

English

(30) Priority Data:

1050408-2 26 April 2010 (26.04.2010) SE

(71) Applicant (for all designated States except US): **ITT MANUFACTURING ENTERPRISES INC** [US/US];
1105 North Market Street, Wilmington, DE 19801 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **SELENIUS, Per** [SE/SE]; Blockhusvägen 16, S-187 46 Täby (SE).

(74) Agent: **BRANN AB**; P.O. Box 12246, S-102 26 Stockholm (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

Published:

— with international search report (Art. 21(3))

(54) Title: LEAD THROUGH FOR DIGESTION TANK

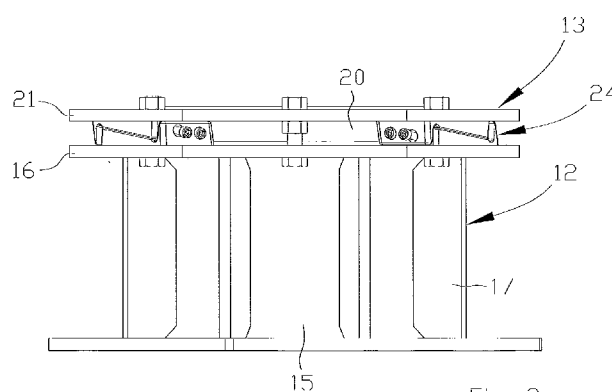


Fig. 3

(57) Abstract: The invention relates to a lead through for fluid tight connection of a mixer assembly to a roof of a fluid housing digestion tank, comprising a first element (12), which presents a central opening and an axially extending centre axis, and a second element (13), which presents a central opening and an axially extending centre axis, the extension of the centre axis of the second element (13) being adjustable in relation to the extension of the centre axis of the first element (12). According to the invention the lead through comprises a means for making an interface fluid tight located at the interface between the first element (12) and the second element (13), at least three positioning members being arranged to determine the mutual positions of the first element (12) and the second element (13) in the axial direction, at least two of said positioning members being constituted by mutually independent adjustment members (24), which in relation to said fluid housing tank (1) are located on the opposite side of said means for making an interface fluid tight.