

Reduction of Asphaltenes from Marine Fuels

Description

5 The present invention discloses a process for reduction of asphaltenes from marine fuels using quaternary ammonium compounds in certain marine fuels, the use of such quaternary ammonium compounds, and certain marine fuels comprising such quaternary ammonium compounds.

Asphaltenes are a widespread constituent of crude oils and refinery stream thereof. In fuels with
10 a certain composition such asphaltenes tend to precipitate from the fuels causing fouling of equipment in contact with the fuel, unless they are dissolved or dispersed.

The nature, chemical, and physical properties of asphaltenes are described in US 5214224, furthermore US 5214224 discloses certain copolymers for the dispersion of asphaltenes. Re-
15 gardless of their chemical composition and constitution asphaltenes in the context of the present invention are determined in accordance with ASTM D3279 and are defined as that part of a marine fuel which is determined according to this method.

WO 2014/193692 A1 discloses a method of asphaltene control in a hydrocarbon fluid using cer-
20 tain quaternary ammonium compounds. *Inter alia* as hydrocarbon fluids marine fuel oils are mentioned, the composition of such oils is not explicitly disclosed, it is mentioned that such oils include aliphatic or liquid aromatic oils.

It was an object of the present invention to provide a method for further reducing fouling caused
25 by asphaltenes in marine fuels.

The object was achieved by the use of at least one quaternary ammonium compound for dissolving or dispersing asphaltenes in marine fuels comprising
- 5 to 70 wt% saturates (determined according to SARA analysis using TLC-FID, IP 469), preferably 5 to 60, more preferably 10 to 50 wt%
30 - 10 to 85 wt% aromatics (determined according to SARA analysis using TLC-FID, IP 469), preferably 20 to 80, more preferably 30 to 70 wt%, and
- 1 to 30 wt% asphaltenes (determined according to ASTM D3279), preferably 3 to 25, more preferably 5 to 20 wt%,
35 with the proviso that the sum of saturates, aromatics, and asphaltenes is less than 100 wt%, wherein

the weight ratio of saturates to asphaltenes is at least 4.0, preferably at least 4.2, more preferably at least 4.5, even more preferably at least 4.75, and especially at least 5.0.

Another object of the present invention is a marine fuel composition, comprising

- 5 - 5 to 70 wt% saturates (determined according to SARA analysis using TLC-FID, IP 469), preferably 5 to 60, more preferably 10 to 50 wt%,
- 10 to 85 wt% aromatics (determined according to SARA analysis using TLC-FID, IP 469), preferably 20 to 80, more preferably 30 to 70 wt%,
- 1 to 30 wt% asphaltenes (determined according to ASTM D3279), preferably 3 to 25, more
10 preferably 5 to 20 wt%, and
- 50 to 2000 ppm by weight of at least one quaternary ammonium compound, preferably 60 to 1500, and more preferably 70 to 1000 ppm by weight,
wherein

- the weight ratio of saturates to asphaltenes is at least 4.0, preferably at least 4.2, more preferably
15 at least 4.5, even more preferably at least 4.75, and especially at least 5.0.

Another object of the present invention is a process for reducing or preventing fouling caused by asphaltenes in marine fuels comprising

- 5 to 70 wt% saturates (determined according to SARA analysis using TLC-FID, IP 469), preferably
20 erably 5 to 60, more preferably 10 to 50 wt%,
- 10 to 85 wt% aromatics (determined according to SARA analysis using TLC-FID, IP 469), preferably 20 to 80, more preferably 30 to 70 wt%,
- 1 to 30 wt% asphaltenes (determined according to ASTM D3279), preferably 3 to 25, more preferably 5 to 20 wt%, and
25 wherein

the weight ratio of saturates to asphaltenes is at least 4.0, preferably at least 4.2, more preferably at least 4.5, even more preferably at least 4.75, and especially at least 5.0

- by adding 50 to 2000 ppm by weight of at least one quaternary ammonium compound to the
30 said marine fuel, preferably 60 to 1500, and more preferably 70 to 1000 ppm by weight.

- In a preferred embodiment of this process according to the invention it is possible to reduce the potential total sediment (TSP) value, determined according to ISO 10307-2:2009(E), procedure A, of the unadditised marine fuel by at least 25 %, preferably by at least 30 %, more preferably
35 by at least 35 %, and even by at least 40 % by adding the indicated amounts of at least one quaternary ammonium compound to the said marine fuel.

The basis underlying this invention is the observation that quaternary ammonium compounds are more effective in dissolving or dispersing asphaltenes in marine fuels with a high content of saturates than in those with a lower content.

- 5 Therefore, the use of quaternary ammonium compounds is preferred in marine fuels with a content of saturates according to IP 469 of at least 15, preferably at least 20 wt%.

For the sake of simplicity within this text aromatics and polyaromatics according to IP 469 are collectively referred to as "aromatics" and polyaromatics are deemed to be included, even if not
10 explicitly mentioned.

With regard to marine fuels saturates, aromatics, and asphaltenes refer to those compounds which are determined according to the respective norm, i.e. SARA analysis in the case of saturates and aromatics or ASTM D3279 for asphaltenes.

15 It should be mentioned that the content of asphaltenes is independent of the content of saturates, aromatics, and resins in the marine fuel, so that the amounts of asphaltenes (determined according to ASTM D3279) in the marine fuel is from 1 to 30 wt% asphaltenes, preferably from 3 to 25, and more preferably from 5 to 20 wt% irrespective of the content of saturates, aromatics, and/or resins.
20

The invention is described in further detail as follows:

Marine Fuel

25 The fuel is a marine fuel, such as MGO (Marine gas oil), MDO (Marine diesel oil), IFO (Intermediate fuel oil), MFO (Marine fuel oil), or HFO (Heavy fuel oil). Further examples for marine fuel are IFO 380 (an Intermediate fuel oil with a maximum viscosity of 380 centistokes at 50 °C (<3.5% sulphur)), IFO 180 (an Intermediate fuel oil with a maximum viscosity of 180 centistokes
30 (<3.5% sulphur)), LS 380 (a Low-sulphur (<1.0%) intermediate fuel oil with a maximum viscosity of 380 centistokes), LS 180 (a Low-sulphur (<1.0%) intermediate fuel oil with a maximum viscosity of 180 centistokes), LSMGO (a Low-sulphur (<0.1%) Marine Gas Oil, which is often be used in European Ports and Anchorages according to EU Sulphur directive 2005/33/EC), or ULSMGO (a Ultra-Low-Sulphur Marine Gas Oil, also referred to as Ultra-Low-Sulfur Diesel (sulphur 0.0015% max). Further suitable marine fuels are according to DIN ISO 8217 of the category ISO-F- DMX, DMA, DFA, DMZ, DFZ, or DFB, or ISO-F RMA, RMB, RMD, RME, RMG, or
35 RMK. Further suitable marine fuel is distillate marine diesel or residual marine diesel.

The viscosity of the fuel, such as the marine fuel, can vary in a broad range, such as in the range from 1 to 10,000 mm²/s at 40 °C (ISO 3104) or 1 to 1000 mm²/s at 50°C (ISO 3104). Unless mentioned otherwise the viscosity is always measured at 50 °C throughout this text.

5

In a preferred embodiment the marine fuel is a very low sulfur fuel oil (VLSFO) with a sulfur content of not more than 0.5 %.

The sulphur content of a marine fuel depends on the crude oil origin and the refining process.

10 When a fuel burns, sulphur is converted into sulphur oxides. These oxides reach the lubricating oil via the blow-by gas and are corrosive to engine piston liners (see: Monique B. Vermeire, "Everything You Need to Know About Marine Fuels", published by Chevron Global Marine Products, June 2012)

15 For technical and ecological reasons low sulfur fuel are of increasing interest. Suitable low sulfur fuels may contain less than 1, 0.5, 0.2, or 0.1 wt% sulfur. An example is Shell® ULSFO with less than 0.1 wt% sulfur.

Quaternary ammonium compounds

20

The at least one quaternary nitrogen component refer, in the context of the present invention, to nitrogen compounds quaternized in the presence of an acid or in an acid-free manner, preferably obtainable by addition of a compound comprising at least one oxygen- or nitrogen-containing group reactive with an anhydride and additionally at least one quaternizable amino group onto a polycarboxylic anhydride compound and subsequent quaternization.

25

In most cases the quaternary nitrogen component is an ammonium compound, however in the context of the present document morpholinium, piperidinium, piperazinium, pyrrolidinium, imidazolinium or pyridinium cations are also encompassed by the phrase "quaternary nitrogen component".

30

The quaternary ammonium compounds are preferably of the formula



35

in which

A⁻ stands for an anion, preferably a carboxylate R⁵COO⁻ or a carbonate R⁵O-COO⁻,

and

- 5 R¹, R², R³, R⁴, and R⁵ independently of another are an organic residue with from 1 to 100 carbon atoms, substituted or unsubstituted, linear or branched alkyl, alkenyl or hydroxyalkyl residue with 1 to 100, more preferably 1 to 75, even more preferably 1 to 30, most preferably 1 to 25 and especially 1 to 20 carbon atoms,
- 10 R⁵ additionally may be substituted or unsubstituted cycloalkyl or aryl residues bearing 5 to 20, preferably 5 to 12 carbon atoms.

The organic residues R¹ to R⁵ independently of another are preferably unsubstituted.

- 15 It is also possible that the anion may be multiply charged negatively, e.g. if anions of dibasic acids are used, in this case the stoichiometric ratio of the ammonium ions to the anions corresponds to the ratio of positive and negative charges.

- The same is true for salts in which the cation bears more than one ammonium ion, e.g. of the
- 20 substituents connect two or more ammonium ions.

- In the organic residues the carbon atoms may be interrupted by one or more oxygen and/or sulphur atoms and/or one or more substituted or unsubstituted imino groups, and may be substituted by C₆-C₁₂-aryl, C₅-C₁₂-cycloalkyl or a five- or six-membered, oxygen-, nitrogen- and/or
- 25 sulphur-containing heterocycle or two of them together form an unsaturated, saturated or aromatic ring which may be interrupted by one or more oxygen and/or sulphur atoms and/or one or more substituted or unsubstituted imino groups, where the radicals mentioned may each be substituted by functional groups, aryl, alkyl, aryloxy, alkyloxy, halogen, heteroatoms and/or heterocycles.

- 30 Two of the residues R¹ to R⁴ may together form an unsaturated, saturated or aromatic ring, preferably a five-, six- or seven-membered ring (including the nitrogen atom of the ammonium ion).

- In this case the ammonium cation may be a morpholinium, piperidinium, piperazinium, pyrrolidinium, imidazolinium or pyridinium cation.
- 35

In these definitions

C₁–C₂₀-alkyl which may be substituted by functional groups, aryl, alkyl, aryloxy, alkyloxy, halogen, heteroatoms and/or heterocycles is, for example, methyl, ethyl, propyl, isopropyl, n-butyl, sec-butyl, tert-butyl, pentyl, hexyl, heptyl, octyl, 2-ethylhexyl, 2,4,4-trimethylpentyl, decyl, dodecyl, tetradecyl, heptadecyl, octadecyl, eicosyl, 1,1-dimethylpropyl, 1,1-dimethylbutyl, 1,1,3,3-tetramethylbutyl, benzyl, 1-phenylethyl, 2-phenylethyl, α,α -dimethylbenzyl, benzhydryl, p-tolylmethyl, 1-(p-butylphenyl)ethyl, p-chlorobenzyl, 2,4-dichlorobenzyl, p-methoxybenzyl, m-ethoxybenzyl, 2-cyanoethyl, 2-cyanopropyl, 2-methoxycarbonylethyl, 2-ethoxycarbonylethyl, 2-butoxycarbonylpropyl, 1,2-di-(methoxycarbonyl)ethyl, 2-methoxyethyl, 2-ethoxyethyl, 2-butoxyethyl, diethoxymethyl, diethoxyethyl, 1,3-dioxolan-2-yl, 1,3-dioxan-2-yl, 2-methyl-1,3-dioxolan-2-yl, 4-methyl-1,3-dioxolan-2-yl, 2-isopropoxyethyl, 2-butoxypropyl, 2-octyloxyethyl, chloromethyl, 2-chloroethyl, trichloromethyl, trifluoromethyl, 1,1-dimethyl-2-chloroethyl, 2-methoxyisopropyl, 2-ethoxyethyl, butylthiomethyl, 2-dodecylthioethyl, 2-phenylthioethyl, 2,2,2-trifluoroethyl, 2-hydroxyethyl, 2-hydroxypropyl, 3-hydroxypropyl, 4-hydroxybutyl, 6-hydroxyhexyl, 2-aminoethyl, 2-aminopropyl, 3-aminopropyl, 4-aminobutyl, 6-aminoethyl, 2-methylaminoethyl, 2-methylaminopropyl, 3-methylaminopropyl, 4-methylaminobutyl, 6-methylaminoethyl, 2-dimethylaminoethyl, 2-dimethylaminopropyl, 3-dimethylaminopropyl, 4-dimethylaminobutyl, 6-dimethylaminoethyl, 2-hydroxy-2,2-dimethylethyl, 2-phenoxyethyl, 2-phenoxypropyl, 3-phenoxypropyl, 4-phenoxybutyl, 6-phenoxyhexyl, 2-methoxyethyl, 2-methoxypropyl, 3-methoxypropyl, 4-methoxybutyl, 6-methoxyhexyl, 2-ethoxyethyl, 2-ethoxypropyl, 3-ethoxypropyl, 4-ethoxybutyl or 6-ethoxyhexyl, and

C₂–C₂₀-alkyl interrupted by one or more oxygen and/or sulphur atoms and/or one or more substituted or unsubstituted imino groups is, for example, 5-hydroxy-3-oxa-pentyl, 8-hydroxy-3,6-dioxaoctyl, 11-hydroxy-3,6,9-trioxaundecyl, 7-hydroxy-4-oxaheptyl, 11-hydroxy-4,8-dioxaundecyl, 15-hydroxy-4,8,12-trioxapentadecyl, 9-hydroxy-5-oxanonyl, 14-hydroxy-5,10-oxatetradecyl, 5-methoxy-3-oxapentyl, 8-methoxy-3,6-dioxaoctyl, 11-methoxy-3,6,9-trioxaundecyl, 7-methoxy-4-oxaheptyl, 11-methoxy-4,8-dioxaundecyl, 15-methoxy-4,8,12-trioxapentadecyl, 9-methoxy-5-oxanonyl, 14-methoxy-5,10-oxatetradecyl, 5-ethoxy-3-oxapentyl, 8-ethoxy-3,6-dioxaoctyl, 11-ethoxy-3,6,9-trioxaundecyl, 7-ethoxy-4-oxaheptyl, 11-ethoxy-4,8-dioxaundecyl, 15-ethoxy-4,8,12-trioxapentadecyl, 9-ethoxy-5-oxanonyl or 14-ethoxy-5,10-oxatetradecyl.

If two radicals form a ring, they can together be 1,3-propylene, 1,4-butylene, 1,5-pentylene, 2-oxa-1,3-propylene, 1-oxa-1,3-propylene, 2-oxa-1,3-propylene, 1-oxa-1,3-propenylene, 1-aza-1,3-propenylene, 1-C₁-C₄-alkyl-1-aza-1,3-propenylene, 1,4-buta-1,3-dienylene, 1-aza-1,4-buta-1,3-dienylene or 2-aza-1,4-buta-1,3-dienylene.

The number of oxygen and/or sulphur atoms and/or imino groups is not subject to any restrictions. In general, there will be no more than 5 in the radical, preferably no more than 4 and very particularly preferably no more than 3.

5

Furthermore, there is generally at least one carbon atom, preferably at least two carbon atoms, between any two heteroatoms.

Substituted and unsubstituted imino groups can be, for example, imino, methylimino, isopropylimino, n-butylimino or tert-butylimino.

10

Furthermore,

functional groups can be carboxy, carboxamide, hydroxy, di(C₁-C₄-alkyl)amino, C₁-C₄-alkyloxycarbonyl, cyano or C₁-C₄-alkyloxy,

15

C₆-C₁₂-aryl which may be substituted by functional groups, aryl, alkyl, aryloxy, alkyloxy, halogen, heteroatoms and/or heterocycles is, for example, phenyl, tolyl, xylyl, α-naphthyl, β-naphthyl, 4-diphenyl, chlorophenyl, dichlorophenyl, trichlorophenyl, difluorophenyl, methylphenyl, dimethylphenyl, trimethylphenyl, ethylphenyl, diethylphenyl, isopropylphenyl, tert-butylphenyl, dodecylphenyl, methoxyphenyl, dimethoxyphenyl, ethoxyphenyl, hexyloxyphenyl, methylnaphthyl, isopropynaphthyl, chloronaphthyl, ethoxynaphthyl, 2,6-dimethylphenyl, 2,4,6-trimethylphenyl, 2,6-dimethoxyphenyl, 2,6-dichlorophenyl, 4-bromophenyl, 2- or 4-nitrophenyl, 2,4- or 2,6-dinitrophenyl, 4-dimethylaminophenyl, 4-acetylphenyl, methoxyethylphenyl or ethoxymethylphenyl,

25

C₅-C₁₂-cycloalkyl which may be substituted by functional groups, aryl, alkyl, aryloxy, alkyloxy, halogen, heteroatoms and/or heterocycles is, for example, cyclopentyl, cyclohexyl, cyclooctyl, cyclododecyl, methylcyclopentyl, dimethylcyclopentyl, methylcyclohexyl, dimethylcyclohexyl, diethylcyclohexyl, butylcyclohexyl, methoxycyclohexyl, dimethoxycyclohexyl, diethoxycyclohexyl, butylthiocyclohexyl, chlorocyclohexyl, dichlorocyclohexyl, dichlorocyclopentyl or a saturated or unsaturated bicyclic system such as norbornyl or norbornenyl,

30

a five- or six-membered, oxygen-, nitrogen- and/or sulphur-containing heterocycle is, for example, furyl, thienyl, pyrrol, pyridyl, indolyl, benzoxazolyl, dioxolyl, dioxyl, benzimidazolyl, benzothiazolyl, dimethylpyridyl, methylquinolyl, dimethylpyrrol, methoxyfuryl, dimethoxypyridyl, difluoropyridyl, methylthienyl, isopropylthienyl or tert-butylthienyl and

35

C₁ to C₄-alkyl is, for example, methyl, ethyl, propyl, isopropyl, n-butyl, sec-butyl or tert-butyl.

The residues R¹ to R⁵ are preferably C₂-C₁₈-alkyl or C₆-C₁₂-aryl, more preferably C₄-C₁₆-alkyl or C₆-C₁₂-aryl, and even more preferably C₄-C₁₆-alkyl or C₆-aryl.

5

The residues R¹ to R⁵ may be saturated or unsaturated, preferably saturated.

Preferred residues R¹ to R⁵ do not bear any heteroatoms other than carbon or hydrogen.

10 Preferred examples of R¹ to R⁴ are methyl, ethyl, propyl, isopropyl, n-butyl, sec-butyl, tert-butyl, pentyl, hexyl, heptyl, octyl, 2-ethylhexyl, 2,4,4-trimethylpentyl, 2-propylheptyl, decyl, dodecyl, tetradecyl, heptadecyl, octadecyl, eicosyl, 1,1-dimethylpropyl, 1,1-dimethylbutyl, 1,1,3,3-tetramethylbutyl, benzyl, 1-phenylethyl, 2-phenylethyl, α,α -dimethylbenzyl, benzhydryl, p-tolylmethyl or 1-(p-butylphenyl)ethyl.

15

In a preferred embodiment at least one of the residues R¹ to R⁴ is selected from the group consisting of 2-hydroxyethyl, hydroxyprop-1-yl, hydroxyprop-2-yl, 2-hydroxybutyl or 2-hydroxy-2-phenylethyl.

20 In one embodiment R⁵ is a polyolefin-homo- or copolymer, preferably a polypropylene, polybutene or polyisobutene residue, with a number-average molecular weight (M_n) of 85 to 20000, for example 113 to 10 000, or 200 to 10000 or 350 to 5000, for example 350 to 3000, 500 to 2500, 700 to 2500, or 800 to 1500. Preferred are polypropenyl, polybutenyl and polyisobutenyl radicals, for example with a number-average molecular weight M_n of 3500 to 5000, 350 to 3000, 500 to 2500, 700 to 2500 and 800 to 1500 g/mol.

25

Preferred examples of anions A⁻ are the anions of acetic acid, propionic acid, butyric acid, 2-ethylhexanoic acid, trimethylhexanoic acid, 2-propylheptanoic acid, isononanoic acid, versatic acids, decanoic acid, undecanoic acid, dodecanoic acid, saturated or unsaturated fatty acids with 12 to 24 carbon atoms, or mixtures thereof, salicylic acid, oxalic acid mono-C₁-C₄-alkyl ester, phthalic acid mono-C₁-C₄-alkyl ester, C₁₂-C₁₀₀-alkyl- and -alkenyl succinic acid, especially dodecenyl succinic acid, hexadecenyl succinic acid, eicosenyl succinic acid, and polyisobutenyl succinic acid. Further examples are methyl carbonate, ethyl carbonate, n-butyl carbonate, 2-hydroxyethyl carbonate, and 2-hydroxypropyl carbonate.

30

In one preferred embodiment the nitrogen compounds quaternized in the presence of an acid or in an acid-free manner are obtainable by addition of a compound which comprises at least one


35

oxygen- or nitrogen-containing group reactive with an anhydride and additionally at least one quaternizable amino group onto a polycarboxylic anhydride compound and subsequent quaternization, especially with an epoxide, e.g. styrene or propylene oxide, in the absence of free acid, as described in WO 2012/004300, or with a carboxylic ester, e.g. dimethyl oxalate or methyl salicylate. Suitable compounds having at least one oxygen- or nitrogen-containing group reactive with anhydride and additionally at least one quaternizable amino group are especially polyamines having at least one primary or secondary amino group and at least one tertiary amino group, especially N,N-dimethyl-1,3-propane diamine, N,N-dimethyl-1,2-ethane diamine or N,N,N'-trimethyl-1,2-ethane diamine. Useful polycarboxylic anhydrides are especially dicarboxylic acids such as succinic acid, having a relatively long-chain hydrocarbyl substituent, preferably having a number-average molecular weight M_n for the hydrocarbyl substituent of 200 to 10.000, in particular of 350 to 5000. Such a quaternized nitrogen compound is, for example, the reaction product, obtained at 40°C, of polyisobutenylsuccinic anhydride, in which the polyisobutenyl radical typically has an M_n of 1000, with 3-(dimethylamino)propylamine, which constitutes a polyisobutenylsuccinic monoamide and which is subsequently quaternized with dimethyl oxalate or methyl salicylate or with styrene oxide or propylene oxide in the absence of free acid.

Further quaternized nitrogen compounds suitable as compounds are described in WO 2006/135881 A1, page 5, line 13 to page 12, line 14;
WO 10/132259 A1, page 3, line 28 to page 10, line 25;
WO 2008/060888 A2, page 6, line 15 to page 14, line 29;
WO 2011/095819 A1, page 4, line 5 to page 9, line 29;
GB 2496514 A, paragraph [00012] to paragraph [00041];
WO 2013/117616 A1, page 3, line 34 to page 11, line 2;
WO 14/202425 A2, page 3, line 14 to page 5, line 9;
WO 14/195464 A1, page 15, line 31 to page 45, line 26 and page 75, lines 1 to 4;
WO 15/040147 A1, page 4, line 34 to page 5, line 18 and page 19, line 11 to page 50, line 10;
WO 14/064151 A1, page 5, line 14 to page 6, line 17 and page 16, line 10 to page 18, line 12;
WO 2013/064689 A1, page 18, line 16 to page 29, line 8; and
WO 2013/087701 A1, page 13, line 25 to page 19, line 30,
WO 13/000997 A1, page 17, line 4 to page 25, line 3,
WO 12/004300, page 5, lines 20 to 30, page 8, line 1 to page 10, line 10, and page 19, line 29 to page 28, line 3,
each of which is incorporated herein by reference.

35


In one embodiment the quaternized ammonium compound is of formula

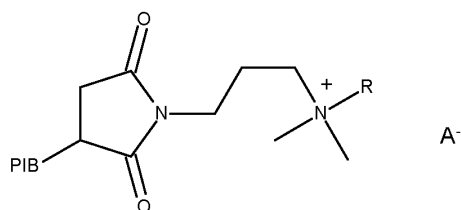

wherein in this formula

- 5 PIB stands for a polyisobutenyl residue having a number average molecular weight M_n of from 550 to 2300, preferably from 650 to 1500 and more preferably from 750 to 1300 g/mol, R stands for an C_1 - to C_4 -alkyl or hydroxy- C_1 - to C_4 -alkyl, preferably methyl or 2-hydroxypropyl, and
- A⁻ stands for an anion, preferably carboxylate R^5COO^- or a carbonate R^5O-COO^- as defined
- 10 above, more preferably acetate, salicylate or methyloxalate.

In another preferred embodiment the quaternized ammonium compound is of formula

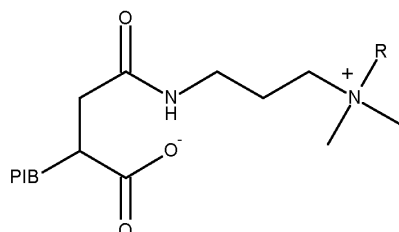


15

wherein in this formula

- PIB stands for a polyisobutenyl residue having a number average molecular weight M_n of from 550 to 2300, preferably from 650 to 1500 and more preferably from 750 to 1300 g/mol,
- 20 R stands for a hydroxy- C_1 - to C_4 -alkyl, preferably 2-hydroxypropyl.

In another embodiment the quaternized compound is of formula

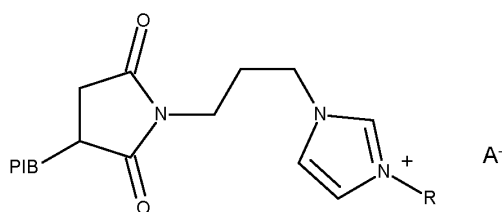


wherein in this formula

- 5 PIB stands for a polyisobutenyl residue having a number average molecular weight M_n of from 550 to 2300, preferably from 650 to 1500 and more preferably from 750 to 1300 g/mol, R stands for an C_{1-} to C_{4-} alkyl or hydroxy- C_{1-} to C_{4-} alkyl, preferably methyl, and A^- stands for an anion, preferably carboxylate R^5COO^- or a carbonate R^5O-COO^- as defined above, more preferably salicylate or methyloxalate.

10

In another embodiment the quaternized ammonium compound is of formula



- 15 wherein in this formula


R^a stands for C_1 – C_{20} -alkyl, preferably C_9 - to C_{17} -alkyl, more preferably for undecyl, tridecyl, pentadecyl or heptadecyl,

R^b stands for a hydroxy- C_{1-} to C_{4-} alkyl, preferably 2-hydroxypropyl or 2-hydroxybutyl, and

- 20 A^- stands for an anion, preferably carboxylate R^5COO^- , as defined above, more preferably R^5COO^- being a carboxylate of a fatty acid, especially A^- being acetate, 2-ethylhexanoate, oleate, polyisobutenyl succinate or monoesters of polyisobutenyl succinate.

In one embodiment the quaternized ammonium compound is of formula

25




wherein in this formula

X_i for $i = 1$ to n and 1 to m are independently of another selected from the group consisting of -
 5 $\text{CH}_2\text{-CH}_2\text{-O-}$, $\text{-CH}_2\text{-CH(CH}_3\text{)-O-}$, $\text{-CH(CH}_3\text{)-CH}_2\text{-O-}$, $\text{-CH}_2\text{-C(CH}_3\text{)}_2\text{-O-}$, $\text{-C(CH}_3\text{)}_2\text{-CH}_2\text{-O-}$, $\text{-CH}_2\text{-CH(C}_2\text{H}_5\text{)-O-}$, $\text{-CH(C}_2\text{H}_5\text{)-CH}_2\text{-O-}$ and $\text{-CH(CH}_3\text{)-CH(CH}_3\text{)-O-}$, preferably selected from the group consisting of $\text{-CH}_2\text{-CH(CH}_3\text{)-O-}$, $\text{-CH(CH}_3\text{)-CH}_2\text{-O-}$, $\text{-CH}_2\text{-C(CH}_3\text{)}_2\text{-O-}$, $\text{-C(CH}_3\text{)}_2\text{-CH}_2\text{-O-}$, $\text{-CH}_2\text{-CH(C}_2\text{H}_5\text{)-O-}$, $\text{-CH(C}_2\text{H}_5\text{)-CH}_2\text{-O-}$ and $\text{-CH(CH}_3\text{)-CH(CH}_3\text{)-O-}$, more preferably selected from the group consisting of $\text{-CH}_2\text{-CH(CH}_3\text{)-O-}$, $\text{-CH(CH}_3\text{)-CH}_2\text{-O-}$, $\text{-CH}_2\text{-C(CH}_3\text{)}_2\text{-O-}$, $\text{-C(CH}_3\text{)}_2\text{-CH}_2\text{-O-}$, -
 10 $\text{CH}_2\text{-CH(C}_2\text{H}_5\text{)-O-}$ and $\text{-CH(C}_2\text{H}_5\text{)-CH}_2\text{-O-}$, most preferably selected from the group consisting of $\text{-CH}_2\text{-CH(C}_2\text{H}_5\text{)-O-}$, $\text{-CH(C}_2\text{H}_5\text{)-CH}_2\text{-O-}$, $\text{-CH}_2\text{-CH(CH}_3\text{)-O-}$ and $\text{-CH(CH}_3\text{)-CH}_2\text{-O-}$, and especially selected from the group consisting of $\text{-CH}_2\text{-CH(CH}_3\text{)-O-}$ and $\text{-CH(CH}_3\text{)-CH}_2\text{-O-}$,

m and n independently of another are positive integers, with the proviso that the sum ($m + n$) is
 15 from 2 to 50, preferably from 5 to 40, more preferably from 10 to 30, and especially from 15 to 25,

R stands for an $\text{C}_1\text{-}$ to $\text{C}_4\text{-alkyl}$, preferably methyl, and
 A^- stands for an anion, preferably carboxylate R^5COO^- or a carbonate $\text{R}^5\text{O-COO}^-$ as defined
 20 above, more preferably salicylate or methyloxalate.

In another preferred embodiment the quaternized ammonium compound is of formula




25

wherein in this formula

R^a and R^b independently of another stand for $\text{C}_1\text{-C}_{20}\text{-alkyl}$ or hydroxy- $\text{C}_1\text{-}$ to $\text{C}_4\text{-alkyl}$, preferably
 R^a stands for $\text{C}_1\text{-C}_{20}\text{-alkyl}$, preferably ethyl, n-butyl, n-octyl, n-dodecyl, tetradecyl or hexadecyl,
 30 and R^b stands for hydroxy- $\text{C}_1\text{-}$ to $\text{C}_4\text{-alkyl}$, preferably 2-hydroxypropyl,
 A^- stands for an anion, preferably carboxylate R^5COO^- or a carbonate $\text{R}^5\text{O-COO}^-$ as defined
 above, more preferably $\text{C}_{12}\text{-C}_{100}\text{-alkyl-}$ and -alkenyl succinic acid, especially dodecenyl succinic
 acid, hexadecenyl succinic acid, eicosenyl succinic acid, and polyisobutenyl succinic acid.


Preferred quaternary ammonium compounds are selected from the group consisting of

- quaternized ammonium compounds of formula

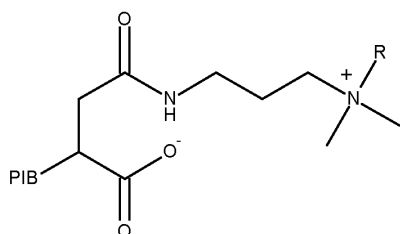


5

- and quaternized ammonium compounds of formula



very preferred are quaternized ammonium compounds of formula

10

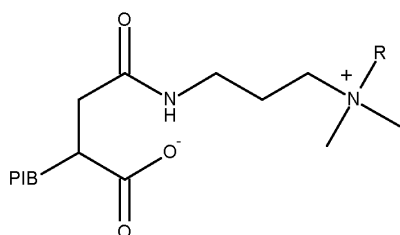

Usually at least one quaternary ammonium compound is used in the marine fuel, for example one to three, preferably one or two and especially one quaternary ammonium compound.

15

The at least one quaternary ammonium compound is used in the marine fuels in amounts of from 50 to 2000 ppm by weight, preferably 60 to 1500, and more preferably 70 to 1000 ppm by weight.

20 In exceptional cases, especially for testing purposes, the at least one quaternary ammonium compound is used in the marine fuels in amounts of from 20 to 5000 ppm by weight, preferably from 30 to 4000, and more preferably from 40 to 3000 ppm by weight.

In general the at least one quaternary ammonium compound is metered into the marine fuel as a solution in at least one solvent, for example, nonpolar organic solvents such as aromatic and aliphatic hydrocarbons, for example toluene, xylenes, white spirit and products sold under the trade names SHELLSOL (Royal Dutch/Shell Group) and EXXSOL (ExxonMobil), and also polar
5 organic solvents, for example, alcohols such as 2-ethylhexanol, decanol and isotridecanol.

The mixing of the fuel and the at least one quaternary ammonium compound may be achieved by application of mechanical shear energy, e.g. in a stirred vessel or tank, shaking, rotor stator mixing, the turbulent flow through a pipe conveyed by pumps or by gravity, static mixers and
10 counter current flow mixers. The mixing may also be achieved by a circulating the fuel through a loop, e.g. by pumping them from the bottom of a tank to the top of the tank, where they are dumped on the surface of the tank content. Prior to the circulating of the fuel and the water a pre-stirring is possible, but not required. In a preferred embodiment the at least one quaternary ammonium compound may be metered into the loop during circulation.

15 In another embodiment that at least one quaternary ammonium compound may be metered into the fuel pipe before the fuel is conveyed into the combustion chamber.

The quaternary ammonium compounds may be part of additive packages, which further to the
20 quaternary ammonium compounds may comprise one or more selected from the group consisting of dehazers, antioxidants, metal deactivators, and solvents

Dehazer

25 Suitable dehazer are, for example, the alkali metal or alkaline earth metal salts of alkyl-substituted phenol- and naphthalenesulfonates and the alkali metal or alkaline earth metal salts of fatty acids, and also neutral compounds such as alcohol alkoxylates, e.g. alcohol ethoxylates, phenol alkoxylates, e.g. tert-butylphenol ethoxylate or tert-pentylphenol ethoxylate, fatty acids, alkylphenols, condensation products of ethylene oxide (EO) and propylene oxide (PO), for ex-
30 ample including in the form of EO/PO block copolymers, polyethyleneimines or else polysiloxanes.

Further suitable dehazers are EO/PO-based alkoxylates of alkylphenol-formaldehyde condensates (Novolac, resol or calixarene type), EO/PO-based alkoxylates of diols (e.g. propandiol,
35 ethylene glycole), triols (e.g. glycerol or trimethylolpropane), ethylene diamine, or polyethyleneimine. Further suitable dehazers are alkylbenzene sulfonic acids, dialkylsulfosuccinates or alkali

metal or ammonium salts thereof. Suitable dehazers are described in WO 96/22343. Further suitable dehazers based on diglycidyl ethers are described in US 3383326 and US 3511882.

5 Other suitable dehazers are, for example, alkoxyated phenol-formaldehyde condensates, for example the products available under the trade names NALCO 7D07 (Nalco) and TOLAD 2683 (Petrolite).

Antioxidants

10 Suitable antioxidants are, for example, substituted phenols, such as 2,6-di-tert-butylphenol, 2,6-di-tert-butyl-4-methyl phenol, 2,4-di-tert-butyl-6-methylphenol, preferably hindered phenols with an ester group bearing radical in para position, such as 3-[3,5-bis-(dimethylethyl)-4-hydroxy-phenyl] propanoic acid C₆- to C₂₀-alkyl esters, e.g. 2-ethylhexyl- or stearylester, and also phenylenediamines such as N,N'-di-sec-butyl-p-phenylenediamine.

15

Metal deactivators

Suitable metal deactivators are, for example, salicylic acid derivatives such as N,N'-disalicylidene-1,2-propanediamine.

20

Solvents

25 Suitable solvents are, for example, nonpolar organic solvents such as aromatic and aliphatic hydrocarbons, for example toluene, xylenes, white spirit and products sold under the trade names SHELLSOL (Royal Dutch/Shell Group) and EXXSOL (ExxonMobil), and also polar organic solvents, for example, alcohols such as 2-ethylhexanol, 2-propylheptanol, decanol, isotridecanol and isoheptadecanol. Such solvents are usually added to the fuel together with the aforementioned additives and coadditives, which they are intended to dissolve or dilute for better handling.

30

The above-mentioned quaternary ammonium compounds dissolve or disperse asphaltenes in marine fuels and are especially effective in marine fuels with a high weight ratio of saturates to asphaltenes. Thus, the quaternary ammonium compounds are especially effective against fouling of asphaltenes precipitating from marine fuels.

35

They are especially useful for removing and/or preventing precipitates from the marine-fuels in tanks, nozzles, flanges, pumps, fuel pipelines, fuel filters and/or separators.

The amounts given throughout the text refer to the pure components excluding e.g. solvent, unless stated otherwise.

5 Examples

Analytical Methods

SARA analyses were performed on the components according to IP 469 via TLC-FID using a Latroscan® MK 6 from company NTS America, Inc.

- 10 In addition, asphaltene contents according to ASTM D3279 and sulfur contents via EN ISO 8754:2003-12 were determined. Values are given in weight%, unless stated otherwise.

Total sediment (TSE) was determined according to ISO 10307-1:2009(E).

- Potential total sediment (TSP) was determined according to ISO 10307-2:2009(E), procedure A.
Accelerated total sediment (TSA) was determined according to ISO 10307-2:2009(E), procedure B.

Materials

4-Dodecylbenzenesulfonic acid (DBSA, CAS 121-65-3) was obtained from Aldrich.

N-Vinylpyrrolidone-Hexadecen-Copolymer Ganex™ V-216 (see WO 2012/039900) was obtained from company Ashland.

- 20 The inventive quaternary ammonium compound Quat1 was prepared from polyisobutene-substituted succinic anhydride (from polyisobutene with a molecular weight of 1000), 3-dimethylamino-propane-1-amine and propylene oxide (PO) in analogy to Herstellungsbeispiel 1 from WO 2012/004300 by replacing styrene oxide by PO.

- 25 Fuel components 1 to 4 were used for blending of Marine fuels:

	Component 1	Component 2	Component 3	Component 4
Saturates(1) [%]	6.38	6.45	42.67	11.14
Aromatics and Polyaromatics(1) [%]	34.23	82.78	17.87	85.24
Resins(1) [%]	47.6	9.94	18.84	3.07
Asphaltenes [%] (ASTM D3279)	8.7	1.5	1.1	0.1
Sulfur content [%]	0.77	0.94	0.03	0.066

TSE [%]	0.06	0.04	0.01	0.01
TSP [%]	0.06	0.04	0.01	0.01
TSA [%]	0.06	0.04	0.01	0.01

(1) Measured according to IP 469

Marine fuels 1-3 were blended according to the following table (wt%):

	Component 1	Component 2	Component 3	Component 4
Marine fuel 1	45%	10%	35%	10%
Marine fuel 2	32%	20%	38%	10%
Marine fuel 3	35%	20%	18%	27%

For Marine fuels 1-3 the following properties were calculated from their compositions:

	Marine fuel 1	Marine fuel 2	Marine fuel 3
Saturates(1) [%]	19.56	20.66	14.21
Aromatics and Poly-aromatics(1) [%]	38.46	42.83	54.77
Resins(1) [%]	29.32	24.69	22.87
Asphaltenes [%] (ASTM D3279)	4.5	3.5	3.6
Sulfur content [%]	0.46	0.45	0.48
Wt Ratio Saturates : Asphaltenes	4.3	5.9	3.9

5 (1) Measured according to IP 469

The components were blended in the order 2, 4, 1, 3. In the case of dispersant addition, the respective additive was dissolved in component 2 and then blended in the other components were added in the order 4, 1, 3.

Type	Marine fuel	Additive	Additive dosage active compound [ppm]	TSP [%]	TSP improvement over reference
Reference	1	None		0.16	
Inventive Example 1	1	Quat1	250	0.11	-34%
Comparative Example 1	1	DBSA	562	0.17	+5%
Comparative Example 2	1	Ganex™ V-216	511	0.12	-25%
Reference	2	None		0.10	
Inventive Example 2	2	Quat1	250	0.06	-40%
Reference	3	None		0.03	
Inventive Example 3	3	Quat1	250	0.02	-26%

10 The potential total sediment (TSP value, total sediment aged) is the total amount of sediment that can be formed under normal storage conditions, excluding external influences. If the potential total sediment aged of the heavy fuel oil markedly exceeds the specification value (0.10%

m/m maximum) for all grades of intermediate (IFOs) and heavy fuel oils (HFOs)), problems with the fuel cleaning system can occur, fuel filters can get plugged and combustion can become erratic.

	Marine fuel 1	Marine fuel 2	Marine fuel 3
Saturates(1) [%]	19.56	20.66	14.21
Aromatics and Poly-aromatics(1) [%]	38.46	42.83	54.77
Resins(1) [%]	29.32	24.69	22.87
Asphaltenes [%] (ASTM D3279)	4.5	3.5	3.6
Wt Ratio Saturates : Asphaltenes	4.3	5.9	3.9
TSP Improvement	-34%	-40%	-26%

5 (1) Measured according to IP 469

It can easily be seen that the quaternary compound according to the invention reduces the potential total sediment more than compounds known from the prior art. This effect is more pronounced the higher the weight ratio of saturates to asphaltenes is.

10

Marine fuels 4 and 5 were commercially available with compositions as follows:

	Marine fuel 4	Marine fuel 5
Saturates(1) [%]	67.85	63.90
Aromatics and Poly-aromatics(1) [%]	14.38	12.73
Resins(1) [%]	11.20	17.03
Asphaltenes [%] (ASTM D3279)	3.93	4.29
Sulfur content [%]	0.47	0.47
Wt Ratio Saturates (1) : Asphaltenes (ASTM D3279)	17.26	14.90

(1) Measured according to IP 469

Type	Marine fuel	Additive	Additive dosage active compound [ppm]	TSP [%]	TSP improvement over reference
Reference	4	None		0.22	
Inventive Example 4	4	Quat1	250	0.09	-55%
Reference	5	None		0.10	
Inventive Example 5	5	Quat1	250	0.07	-30%

Claims

1. Use of at least one quaternary ammonium compound for dissolving or dispersing asphalt-
tenes in marine fuels comprising
 - 5 - 5 to 70 wt% saturates (determined according to SARA analysis using TLC-FID, IP 469), preferably 5 to 60, more preferably 10 to 50 wt%
 - 10 to 85 wt% aromatics (determined according to SARA analysis using TLC-FID, IP 469), preferably 20 to 80, more preferably 30 to 70 wt%, and
 - 10 - 1 to 30 wt% asphaltenes (determined according to ASTM D3279), preferably 3 to 25, more preferably 5 to 20 wt%,
with the proviso that the sum of saturates, aromatics, and asphaltenes is less than 100 wt%,
wherein
the weight ratio of saturates to asphaltenes is at least 4.0, preferably at least 4.2, more
15 preferably at least 4.5, even more preferably at least 4.75, and especially at least 5.0.
2. Marine fuel composition, comprising
 - 5 to 70 wt% saturates (determined according to SARA analysis using TLC-FID, IP 469), preferably 5 to 60, more preferably 10 to 50 wt%,
 - 20 - 10 to 85 wt% aromatics (determined according to SARA analysis using TLC-FID, IP 469), preferably 20 to 80, more preferably 30 to 70 wt%,
 - 1 to 30 wt% asphaltenes (determined according to ASTM D3279), preferably 3 to 25, more preferably 5 to 20 wt%, and
 - 50 to 2000 ppm by weight of at least one quaternary ammonium compound, prefera-
25 bly 60 to 1500, and more preferably 70 to 1000 ppm by weight,
wherein
the weight ratio of saturates to asphaltenes is at least 4.0, preferably at least 4.2, more
preferably at least 4.5, even more preferably at least 4.75, and especially at least 5.0.
- 30 3. Process for reducing or preventing fouling caused by asphaltenes in marine fuels compris-
ing
 - 5 to 70 wt% saturates (determined according to SARA analysis using TLC-FID, IP 469), preferably 5 to 60, more preferably 10 to 50 wt%,
 - 10 to 85 wt% aromatics (determined according to SARA analysis using TLC-FID, IP

469), preferably 20 to 80, more preferably 30 to 70 wt%,
- 1 to 30 wt% asphaltenes (determined according to ASTM D3279), preferably 3 to 25,
more preferably 5 to 20 wt%, and
wherein

5 the weight ratio of saturates to asphaltenes is at least 4.0, preferably at least 4.2, more
preferably at least 4.5, even more preferably at least 4.75, and especially at least 5.0.

10 by adding 50 to 2000 ppm by weight of at least one quaternary ammonium compound
to the said marine fuel, preferably 60 to 1500, and more preferably 70 to 1000 ppm by
weight.

4. Process according to Claim 3, wherein the potential total sediment (TSP) value, deter-
mined according to ISO 10307-2:2009(E), procedure A, of the unadditised marine fuel
is reduced by at least 25 %, preferably by at least 30 %, more preferably by at least 35
15 %, and even by at least 40 % by adding the indicated amounts of at least one quater-
nary ammonium compound to the said marine fuel.

5. Use according to Claim 1, marine fuel according to Claim 2 or process according to Claim
3 or 4, wherein the marine fuel is selected from the group consisting of ISO-F- DMX,
20 DMA, DFA, DMZ, DFZ, or DFB, or ISO-F RMA, RMB, RMD, RME, RMG, and RMK ac-
cording to DIN ISO 8217.

6. Use according to Claim 1, marine fuel according to Claim 2 or process according to Claim
3 or 4, wherein the marine fuel is selected from the group consisting of MGO (Marine
25 gas oil), MDO (Marine diesel oil), IFO (Intermediate fuel oil), MFO (Marine fuel oil),
HFO (Heavy fuel oil), IFO 380 (<3.5% sulphur), IFO 180 (<3.5% sulphur), LS 380
(<1.0% sulphur), LS 180 (<1.0% sulphur), LSMGO (<0.1% sulphur, and ULSMGO
(sulphur 0.0015% max), especially a very low sulfur fuel oil (VLSFO) with a sulfur con-

tent of not more than 0.5 %.

7. Use, marine fuel, and process according to any one of the preceeding claims, wherein the at least one quaternary ammonium compound is of the formula

5



in which


- 10 A^- stands for an anion, preferably a carboxylate R^5COO^- or a carbonate R^5O-COO^- ,

and

- 15 R^1 , R^2 , R^3 , R^4 , and R^5 independently of another are an organic residue with from 1 to 100 carbon atoms, substituted or unsubstituted, linear or branched alkyl, alkenyl or hydroxyalkyl residue with 1 to 100, more preferably 1 to 75, even more preferably 1 to 30, most preferably 1 to 25 and especially 1 to 20 carbon atoms,

- 20 R^5 additionally may be substituted or unsubstituted cycloalkyl or aryl residues bearing 5 to 20, preferably 5 to 12 carbon atoms.

8. Use, marine fuel, and process according to any one of the preceeding claims, wherein the at least one quaternary ammonium compound is of formula

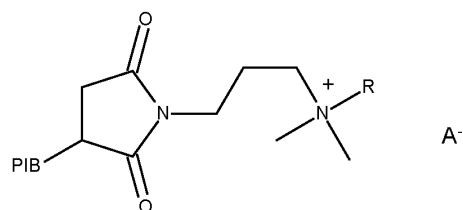

wherein in this formula


5 PIB stands for a polyisobutenyl residue having a number average molecular weight M_n of from 550 to 2300, preferably from 650 to 1500 and more preferably from 750 to 1300 g/mol,

R stands for an C_1 - to C_4 -alkyl or hydroxy- C_1 - to C_4 -alkyl, preferably methyl or 2-hydroxypropyl, and

10 A^- stands for an anion, preferably carboxylate R^5COO^- or a carbonate R^5O-COO^- as defined above, more preferably acetate, salicylate or methyloxalate.

9. Use, marine fuel, and process according to any one of the preceeding claims, wherein the at least one quaternary ammonium compound is of formula

15

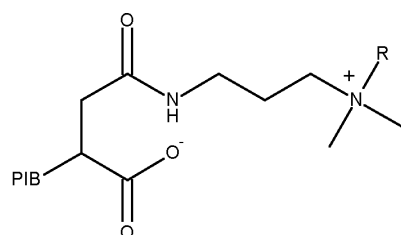


wherein in this formula

PIB stands for a polyisobutenyl residue having a number average molecular weight M_n of from 550 to 2300, preferably from 650 to 1500 and more preferably from 750 to 1300 g/mol,

5 R stands for a hydroxy- C_1 - to C_4 -alkyl, preferably 2-hydroxypropyl.

10. Use, marine fuel, and process according to any one of the preceeding claims, wherein the at least one quaternary ammonium compound is of formula

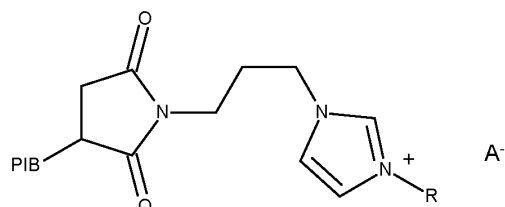

10

wherein in this formula

PIB stands for a polyisobutenyl residue having a number average molecular weight M_n of from 550 to 2300, preferably from 650 to 1500 and more preferably from 750 to 1300 g/mol,


15

R stands for an C_1 - to C_4 -alkyl or hydroxy- C_1 - to C_4 -alkyl, preferably methyl, and

A^- stands for an anion, preferably carboxylate R^5COO^- or a carbonate R^5O-COO^- as defined above, more preferably salicylate or methyloxalate.

20

11. Use, marine fuel, and process according to any one of the preceeding claims, wherein the at least one quaternary ammonium compound is of formula



wherein in this formula

5


R^a stands for C_1 – C_{20} -alkyl, preferably C_9 - to C_{17} -alkyl, more preferably for undecyl, tridecyl, pentadecyl or heptadecyl,

R^b stands for a hydroxy- C_1 - to C_4 -alkyl, preferably 2-hydroxypropyl or 2-hydroxybutyl, and

10

A^- stands for an anion, preferably carboxylate R^5COO^- , as defined above, more preferably R^5COO^- being a carboxylate of a fatty acid, especially A^- being acetate, 2-ethylhexanoate, oleate, polyisobutenyl succinate or monoesters of polyisobutenyl succinate.

- 15 12. Use, marine fuel, and process according to any one of the preceeding claims, wherein the at least one quaternary ammonium compound is of formula



20

wherein in this formula

X_i for $i = 1$ to n and 1 to m are independently of another selected from the group consisting of $-\text{CH}_2-\text{CH}_2-\text{O}-$, $-\text{CH}_2-\text{CH}(\text{CH}_3)-\text{O}-$, $-\text{CH}(\text{CH}_3)-\text{CH}_2-\text{O}-$, $-\text{CH}_2-\text{C}(\text{CH}_3)_2-\text{O}-$, $-\text{C}(\text{CH}_3)_2-\text{CH}_2-\text{O}-$, $-\text{CH}_2-\text{CH}(\text{C}_2\text{H}_5)-\text{O}-$, $-\text{CH}(\text{C}_2\text{H}_5)-\text{CH}_2-\text{O}-$ and $-\text{CH}(\text{CH}_3)-\text{CH}(\text{CH}_3)-\text{O}-$, preferably selected from the group consisting of $-\text{CH}_2-\text{CH}(\text{CH}_3)-\text{O}-$, $-\text{CH}(\text{CH}_3)-\text{CH}_2-\text{O}-$, $-\text{CH}_2-\text{C}(\text{CH}_3)_2-\text{O}-$, $-\text{C}(\text{CH}_3)_2-\text{CH}_2-\text{O}-$, $-\text{CH}_2-\text{CH}(\text{C}_2\text{H}_5)-\text{O}-$, $-\text{CH}(\text{C}_2\text{H}_5)-\text{CH}_2-\text{O}-$ and $-\text{CH}(\text{CH}_3)-\text{CH}(\text{CH}_3)-\text{O}-$, more preferably selected from the group consisting of $-\text{CH}_2-\text{CH}(\text{CH}_3)-\text{O}-$, $-\text{CH}(\text{CH}_3)-\text{CH}_2-\text{O}-$, $-\text{CH}_2-\text{C}(\text{CH}_3)_2-\text{O}-$, $-\text{C}(\text{CH}_3)_2-\text{CH}_2-\text{O}-$, $-\text{CH}_2-\text{CH}(\text{C}_2\text{H}_5)-\text{O}-$ and $-\text{CH}(\text{C}_2\text{H}_5)-\text{CH}_2-\text{O}-$, most preferably selected from the group consisting of $-\text{CH}_2-\text{CH}(\text{C}_2\text{H}_5)-\text{O}-$, $-\text{CH}(\text{C}_2\text{H}_5)-\text{CH}_2-\text{O}-$, $-\text{CH}_2-\text{CH}(\text{CH}_3)-\text{O}-$ and $-\text{CH}(\text{CH}_3)-\text{CH}_2-\text{O}-$, and especially selected from the group consisting of $-\text{CH}_2-\text{CH}(\text{CH}_3)-\text{O}-$ and $-\text{CH}(\text{CH}_3)-\text{CH}_2-\text{O}-$,


m and n independently of another are positive integers, with the proviso that the sum $(m + n)$ is from 2 to 50, preferably from 5 to 40, more preferably from 10 to 30, and especially from 15 to 25,

15

R stands for an C_1 - to C_4 -alkyl, preferably methyl, and

A^- stands for an anion, preferably carboxylate R^5COO^- or a carbonate $\text{R}^5\text{O}-\text{COO}^-$ as defined above, more preferably salicylate or methyloxalate.

20 13. Use, marine fuel, and process according to any one of the preceeding claims, wherein the at least one quaternary ammonium compound is of formula



wherein in this formula

5 R^a and R^b independently of another stand for C_1 – C_{20} -alkyl or hydroxy- C_1 - to C_4 -alkyl, preferably R^a stands for C_1 – C_{20} -alkyl, preferably ethyl, n-butyl, n-octyl, n-dodecyl, tetradecyl or hexadecyl, and R^b stands for hydroxy- C_1 - to C_4 -alkyl, preferably 2-hydroxypropyl,

10 A^- stands for an anion, preferably carboxylate R^5COO^- or a carbonate R^5O-COO^- as defined above, more preferably C_{12} – C_{100} -alkyl- and -alkenyl succinic acid, especially do-
decenyl succinic acid, hexadecenyl succinic acid, eicosenyl succinic acid, and polyiso-
butenyl succinic acid.

14. Use of quaternary ammonium compounds as described in any one of Claims 7 to 13 in
marine fuels with a content of saturates according to IP 469 of at least 15, preferably at
15 least 20 wt%.

15. Use, marine fuel, and process according to any one of the preceeding claims, wherein the
at least one quaternary ammonium compound is used in the marine fuel in amounts of
from 20 to 5000 ppm by weight, preferably from 30 to 4000, and more preferably from
20 40 to 3000 ppm by weight.