



- (51) **International Patent Classification:**  
*E21B 10/567* (2006.01) *E21B 10/55* (2006.01)  
*E21B 10/43* (2006.01)
- (21) **International Application Number:**  
PCT/US2013/039393
- (22) **International Filing Date:**  
3 May 2013 (03.05.2013)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**  
13/492,267 8 June 2012 (08.06.2012) US
- (71) **Applicant:** BAKER HUGHES INCORPORATED  
[US/US]; P.o. Box 4740, Houston, Texas 77210-4740 (US).
- (72) **Inventor:** STOWE, II, Calvin J.; 4327 Verone, Bellaire, Texas 77401 (US).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,

KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


**Declarations under Rule 4.17:**

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

**Published:**

- with international search report (Art. 21(3))

(54) **Title:** CUTTING ELEMENT, CUTTER TOOL AND METHOD OF CUTTING WITHIN A BOREHOLE

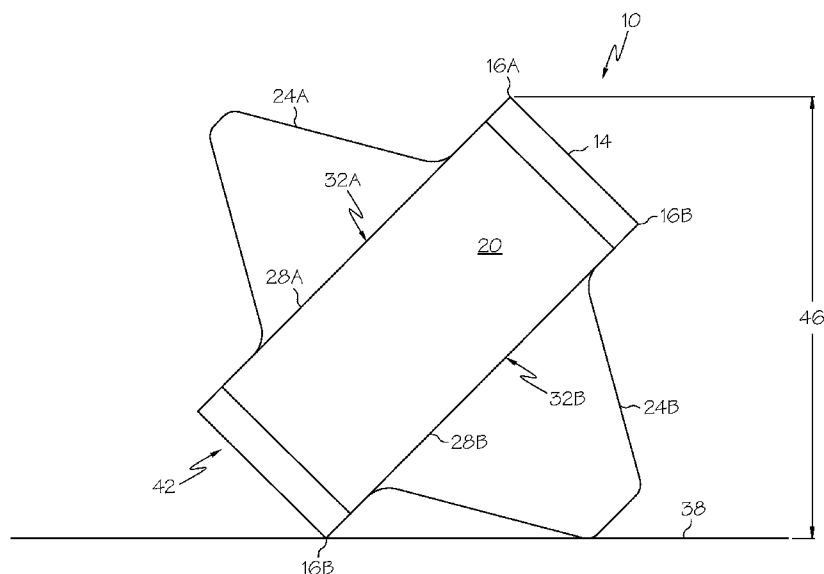

(57) **Abstract:** A cutting element includes a modified gilmoid having two planes defining a plurality of cutting edges thereon, and a first support extending from a central area of a first of the two planes and a second support extending from a central area of a second of the two planes. The supports are sized and positioned such that when the cutting element is resting against a planar surface such that one of the plurality of cutting edges and the first support are in contact with the planar surface the first plane forms an acute angle with the planar surface.

