



(51) International Patent Classification:
C02F 1/44 (2006.01) *E21B 43/20* (2006.01)

(21) International Application Number:
PCT/GB2010/001988

(22) International Filing Date:
26 October 2010 (26.10.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0918800.4 27 October 2009 (27.10.2009) GB

(71) Applicant (for all designated States except US): **VWS WESTGARTH LIMITED** [GB/GB]; Gloucester Business Park, 1380 Montpellier Court, Hucclecote, Glouc GL3 4AH (GB).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **BOUDINAR, Mourad Ben** [GB/GB]; 5 Ballater Drive, Bearsden, Glasgow G61 1 BY (GB).

(74) Agent: **DOCHERTY, Andrew**; Marks & Clerk LLP, Aurora, 120 Bothwell Street, Glasgow G2 7JS (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: FLUID TREATMENT APPARATUS AND METHOD

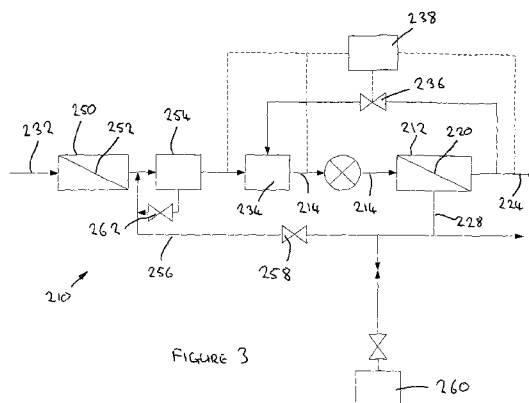


FIGURE 3

(57) Abstract: A method of treating a fluid comprises producing a permeate fluid (24) from an outlet (22) of a filtration unit (12), delivering the permeate fluid (24) to be injected into a subterranean formation, and recirculating at least a portion of the permeate fluid to be mixed with a source fluid (32) to produce a feed fluid (14) to be treated within the filtration unit (12).