

(19) World Intellectual Property Organization
International Bureau



162162

(43) International Publication Date
9 January 2003 (09.01.2003)

PCT


(10) International Publication Number
WO 03/003719 A1

- (51) International Patent Classification⁷: H04N 5/217, 1/407, 3/15, 5/235 (72) Inventor: NAKAMURA, Yoshiaki; 5-402, Kasumidai-Daiichi-Jutaku, 9-7-1, Kabemachi, Ome-shi, Tokyo 198-0036 (JP).
- (21) International Application Number: PCT/JP01/09438 (74) Agents: SUZUYE, Takehiko et al.; c/o SUZUYE & SUZUYE, 7-2, Kasumigaseki 3-chome, Chiyoda-ku, Tokyo 100-0013 (JP).
- (22) International Filing Date: 26 October 2001 (26.10.2001)
- (25) Filing Language: English (81) Designated States (national): AU, CA, CN, IN, KR, NO, SG.
- (26) Publication Language: English (84) Designated States (regional): Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, ES, FI, FR, GB, IT, NL, SE).
- (30) Priority Data: 2001-198615 29 June 2001 (29.06.2001) JP (71) Applicant: CASIO COMPUTER CO., LTD. [JP/JP]; 6-2, Hon-machi 1-chome, Shibuya-ku, Tokyo 151-8543 (JP).
- Published:
with international search report

[Continued on next page]

(54) Title: PHOTSENSOR SYSTEM AND DRIVE CONTROL METHOD THEREOF

G00002

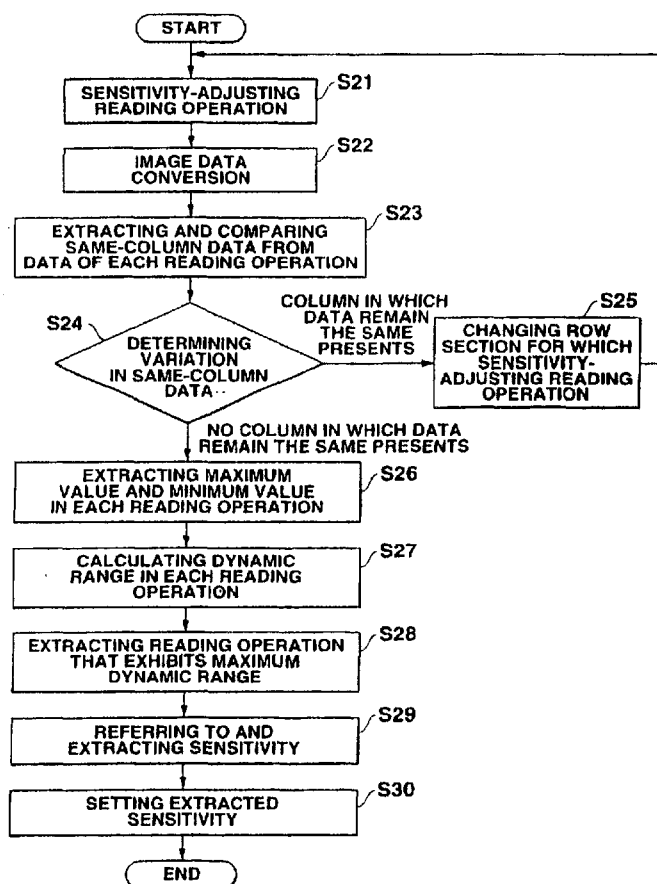

(57) Abstract: A photosensor system performs a sensitivity-adjusting reading operation with respect to a subject image, while simultaneously changing the image reading sensitivity stepwise for each of rows of a photosensor array or for specific rows thereof. The dynamic ranges of the lightness data on the read subject image are checked to see how they are distributed in relation to the image reading sensitivities. On the basis of this distribution, an image reading sensitivity that contributes to an optimal image reading state is extracted as an optimal image reading sensitivity.

WO 03/003719 A1

WO 03/003719 A1

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.