

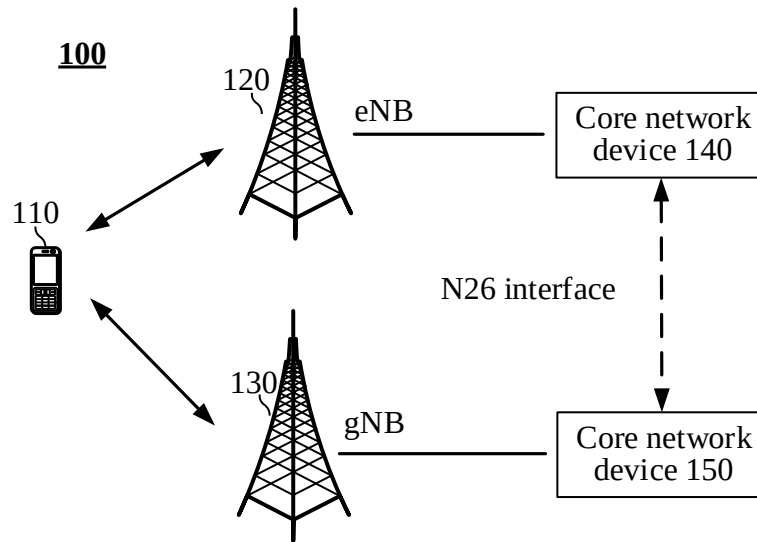


FIG. 1

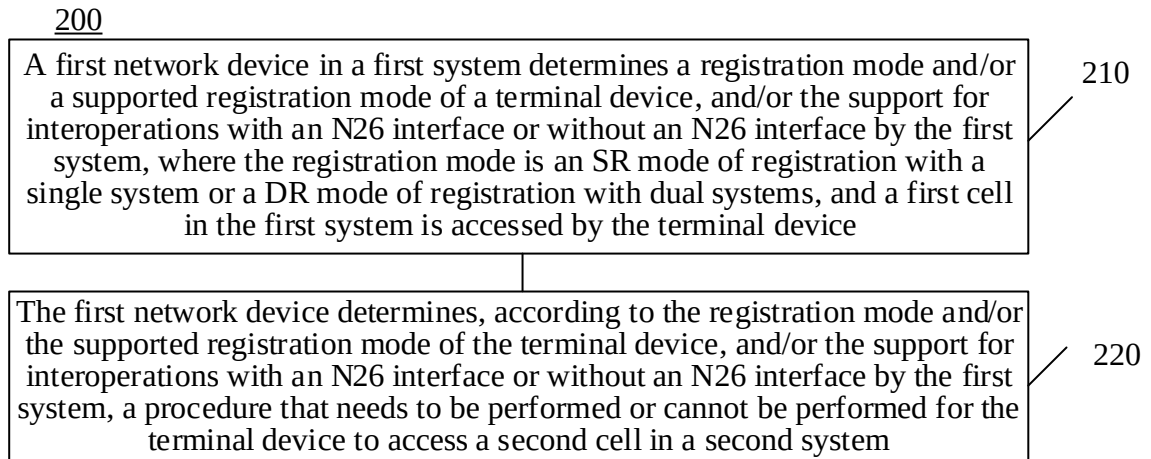


FIG. 2

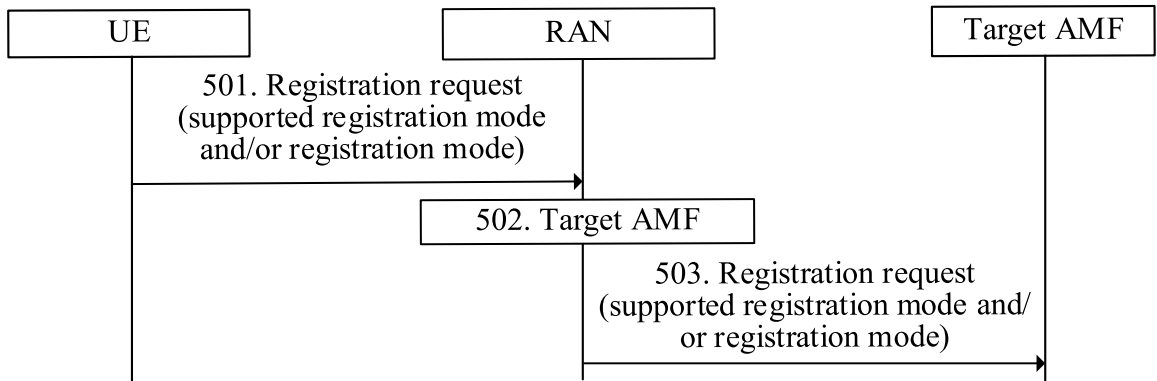


FIG. 3

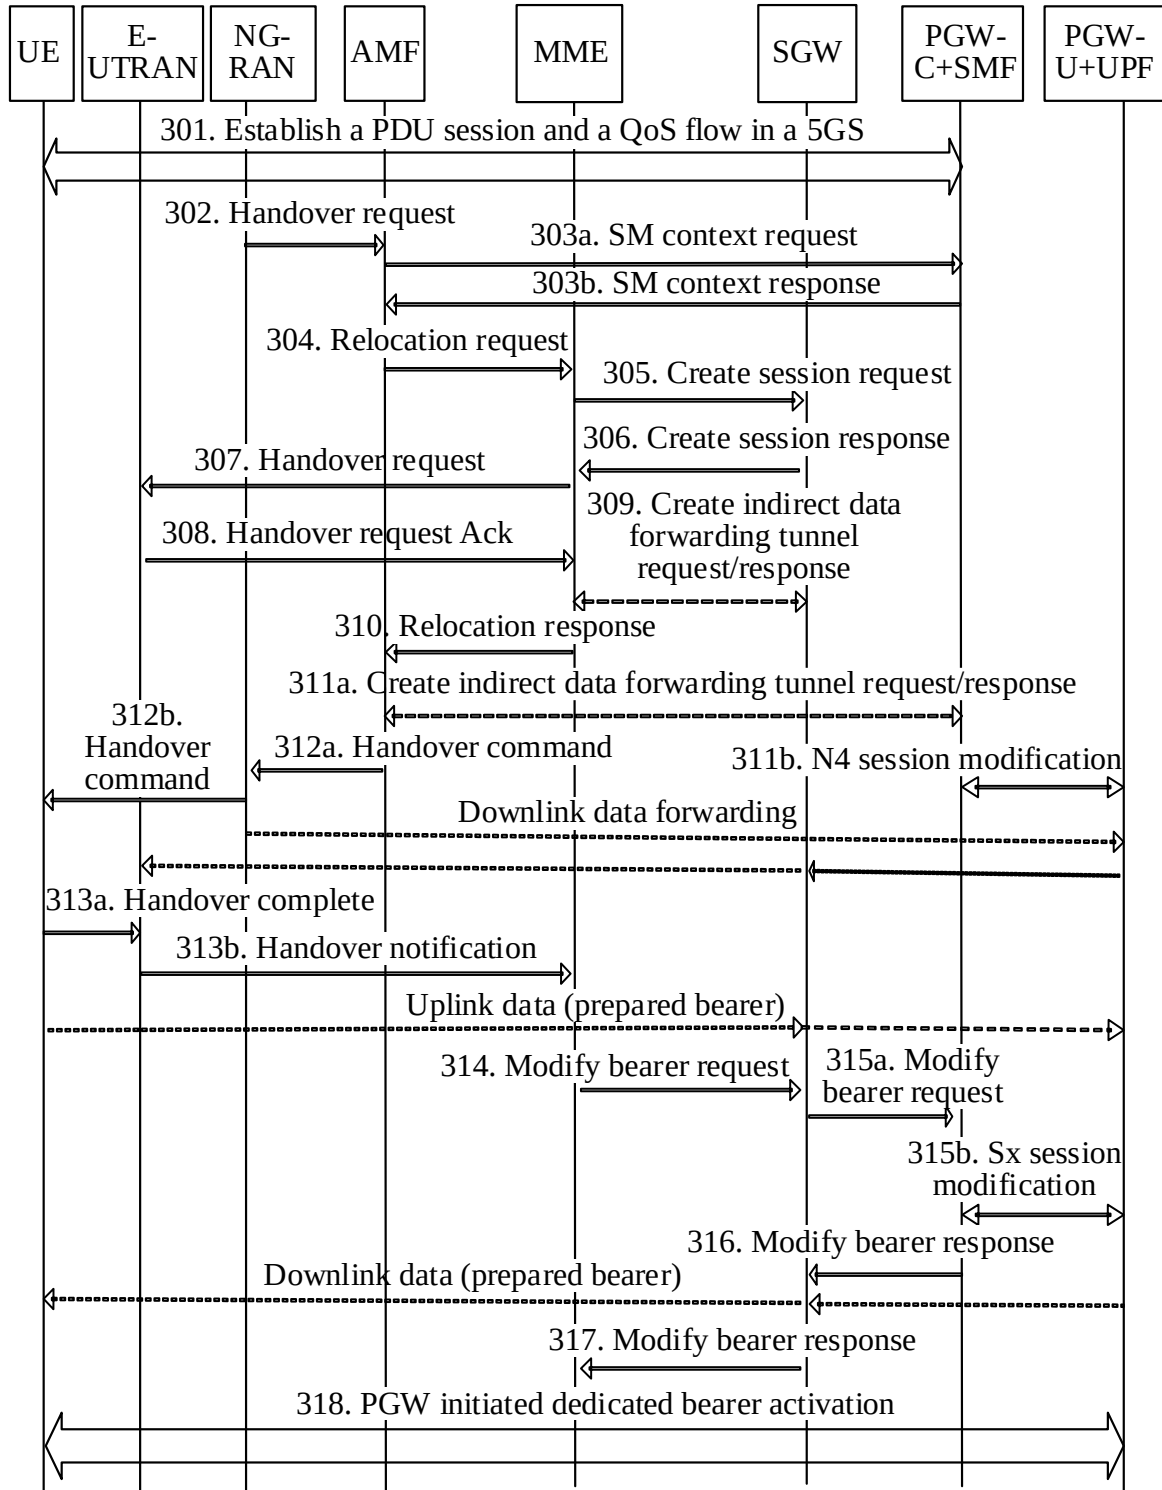


FIG. 4

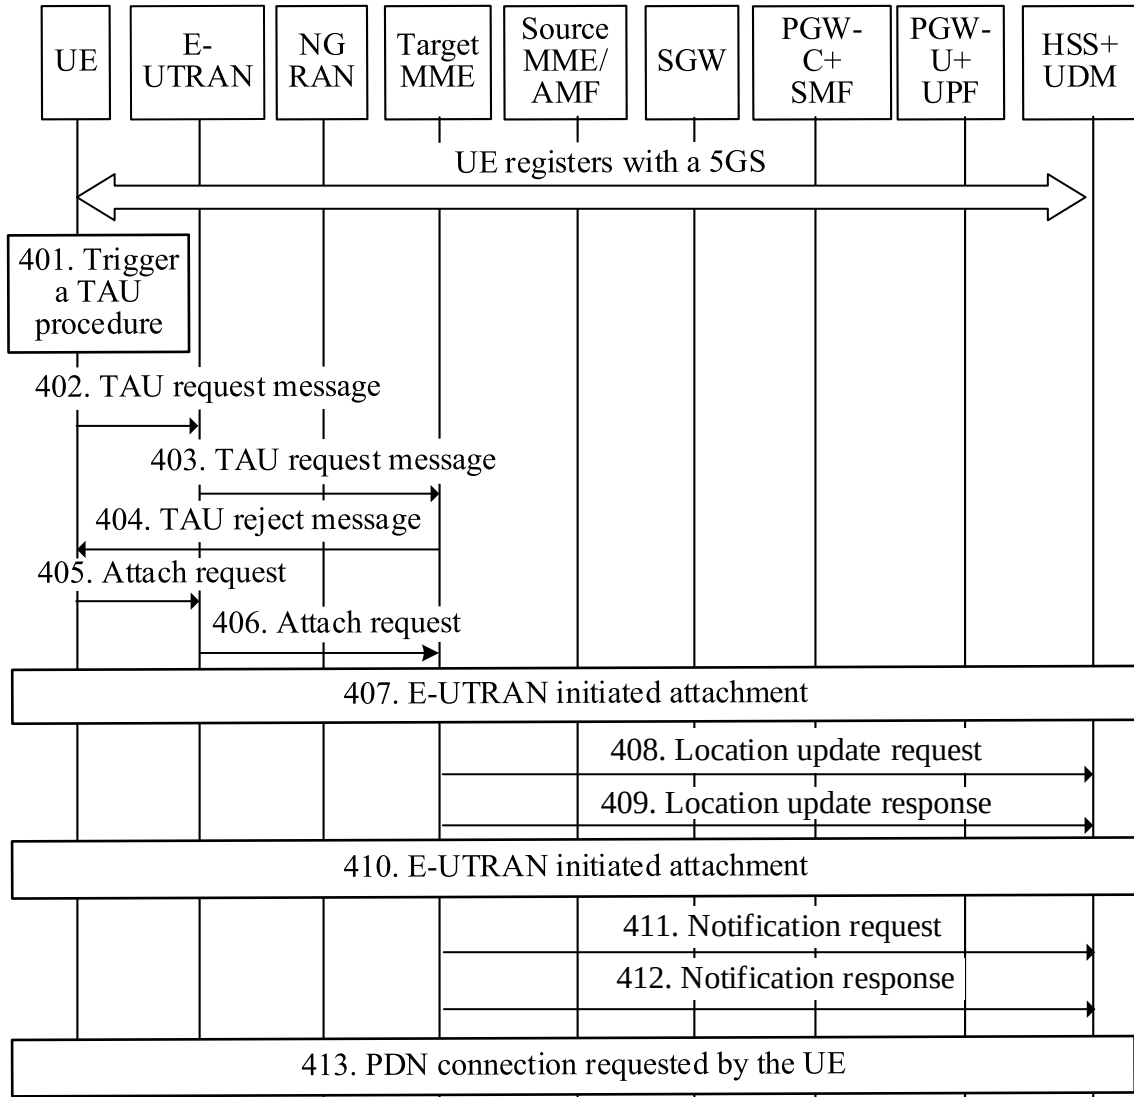


FIG. 5

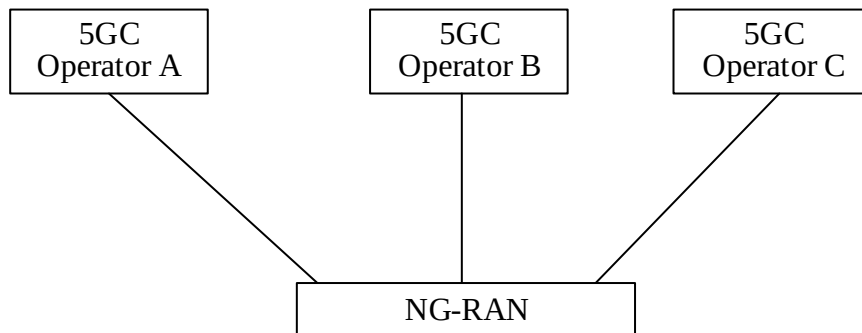


FIG. 6

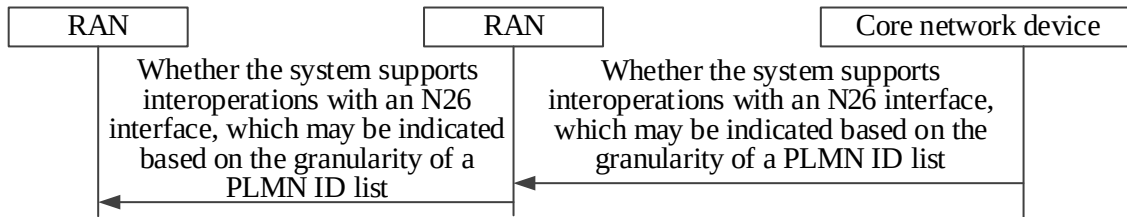


FIG. 7

600

A second network device determines at least one of a registration mode and a supported registration mode of a terminal device, the support for interoperations with an N26 interface or without an N26 interface by a first system, the support for interoperations with an N26 interface or without an N26 interface by a system corresponding to at least one PLMN, and registration of the terminal device with a second system

610

The second network device sends indication information to a first network device in the first system, where the indication information is used to indicate at least one of the registration mode and the supported registration mode of the terminal device, the support for interoperations with an N26 interface or without an N26 interface by the first system, the support for interoperations with an N26 interface or without an N26 interface by the system corresponding to at least one PLMN, and the registration of the terminal device with the second system

620

FIG. 8

700

A second network device determines at least one of a registration mode and a supported registration mode of a terminal device and registration of the terminal device with a second system

710

The second network device sends indication information to a first network device in the first system, where the indication information is used to indicate at least one of the registration mode and the supported registration mode of the terminal device and the registration of the terminal device with the second system

720

FIG. 9

1300

A terminal device receives indication information sent by a network device, where the indication information is used to indicate the support for interoperations with an N26 interface or without an N26 interface by a system corresponding to at least one PLMN

1310

Choose, based on the support for interoperations with an N26 interface or without an N26 interface by the system corresponding to the at least one PLMN, a PLMN for access

1320

FIG. 10

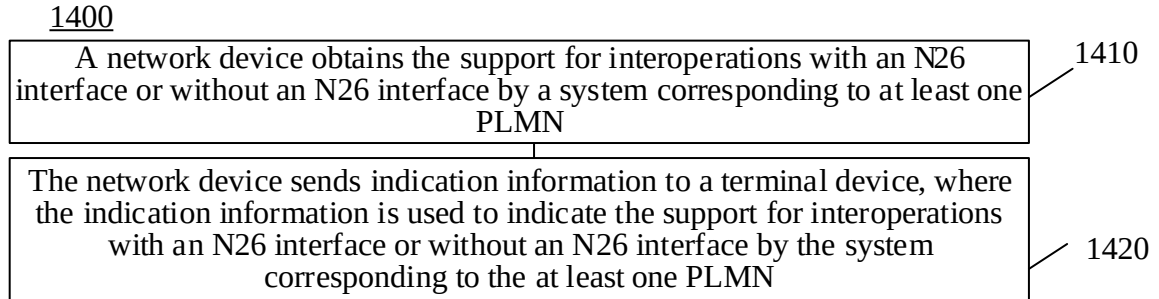


FIG. 11

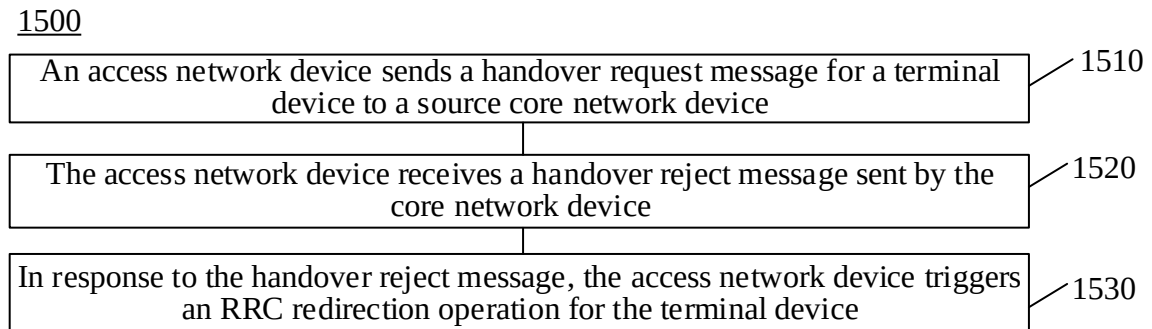


FIG. 12

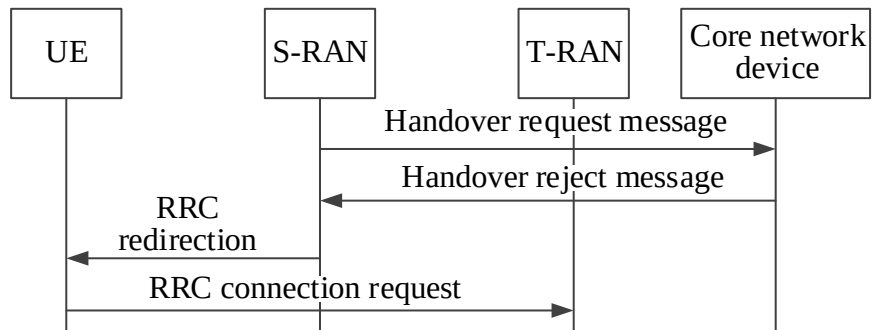


FIG. 13

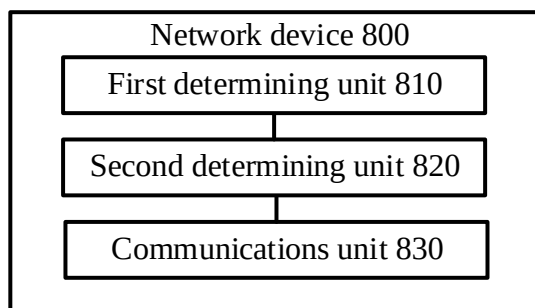


FIG. 14

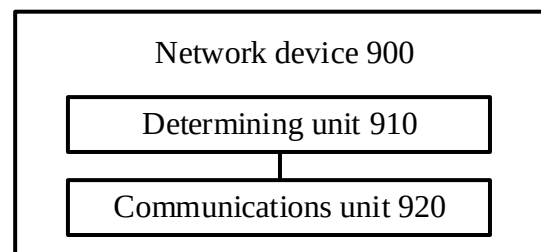


FIG. 15

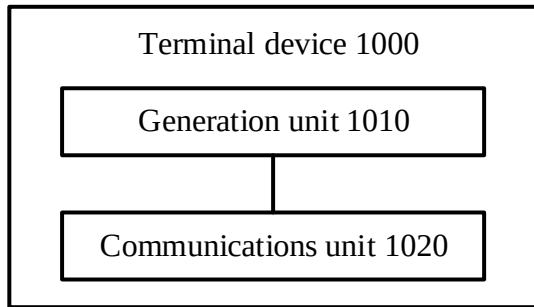


FIG. 16

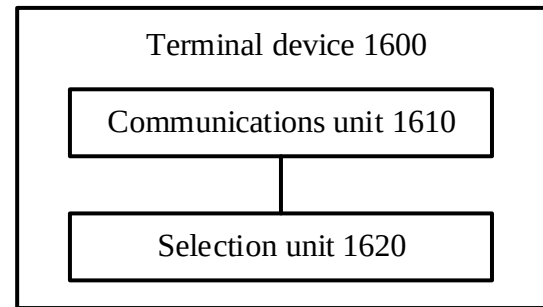


FIG. 17

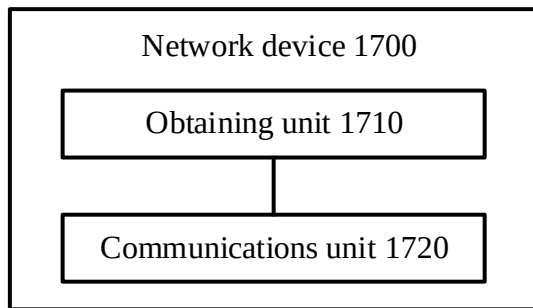


FIG. 18

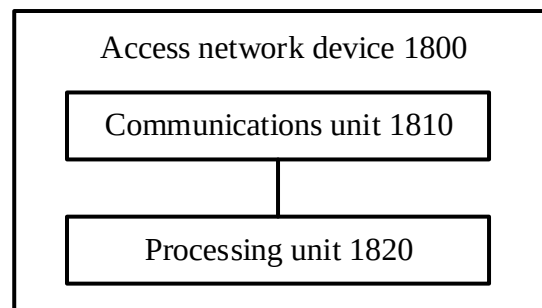


FIG. 19

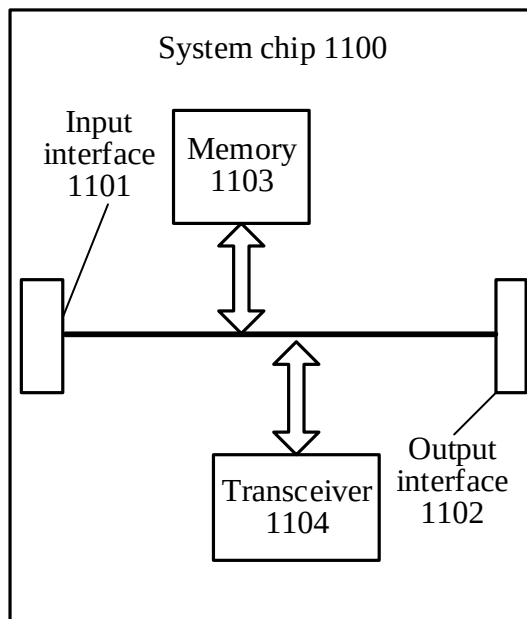


FIG. 20

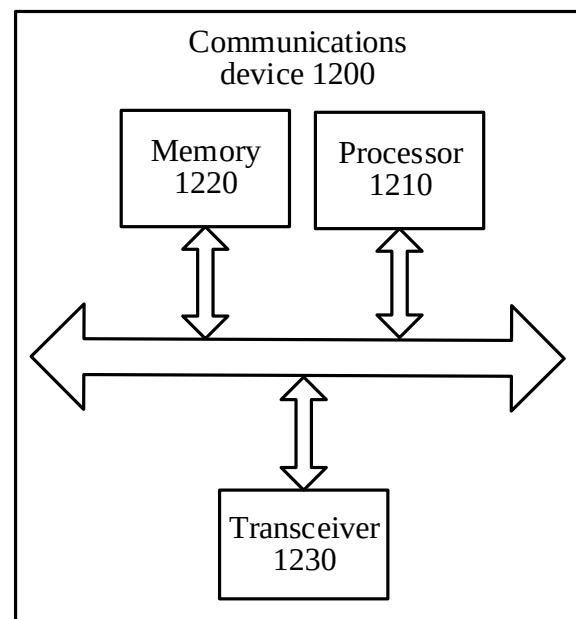


FIG. 21