

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
20 March 2003 (20.03.2003)

PCT

(10) International Publication Number
WO 03/023905 A3

(51) International Patent Classification⁷: **H01R 12/20**

(21) International Application Number: PCT/US02/29040

(22) International Filing Date:
12 September 2002 (12.09.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2001/278258 13 September 2001 (13.09.2001) JP

(71) Applicant (*for all designated States except US*): **MOLEX INCORPORATED** [US/US]; 2222 Wellington Court, Lisle, IL 60532 (US).

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): **TAKAHASHI, Kazuya** [JP/JP]; 4-2729-7-305 Iriya, Zama-shi, Kanagawa 228-0024 (JP).


(74) Agent: **ZEITLER, Robert, J.**; Molex Incorporated, 2222 Wellington Court, Lisle, IL 60532 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: NUT HOLDING STRUCTURE FOR CONNECTOR

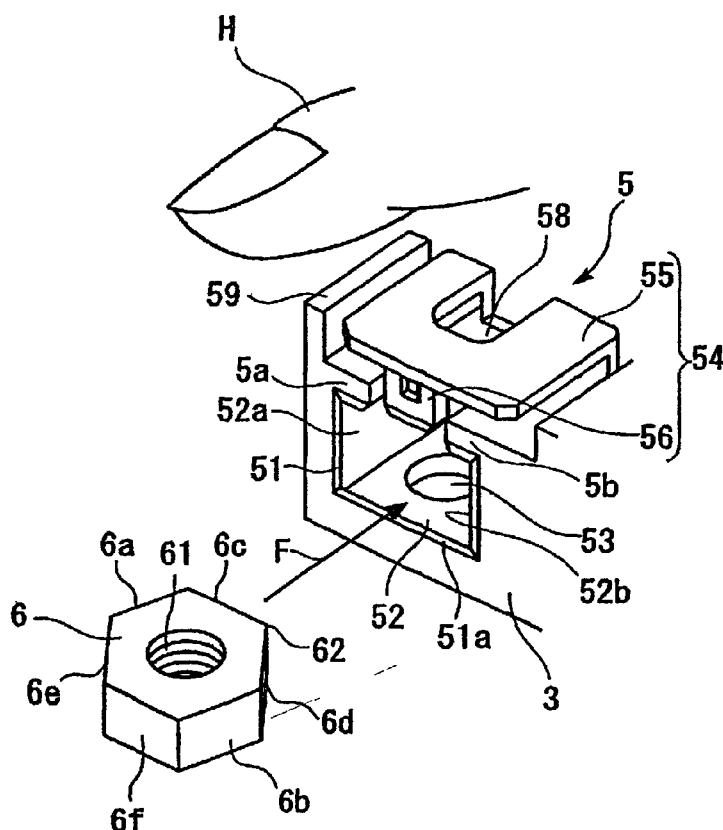

(57) Abstract: A nut holding structure for a connector having nut holding portions (5) formed integrally with a resin housing (3) of a connector, and nuts (6) detachably held in the nut holding portions (5). Each nut holding portion (5) is equipped with a nut accommodating chamber (52) having an in-and-out opening (51) for the nut (6), a screw member insertion hole (53) provided coaxially with a screw hole (61) of the nut (6) accommodated in the nut accommodating chamber (52), and a lock member (54) for preventing the nut (6) accommodated in the nut accommodating chamber (52) from coming out through the in-and-out opening (51) for the nut (6).

WO 03/023905 A3



Published:

- *with international search report*
- *with amended claims*

Date of publication of the amended claims: 18 December 2003

(88) Date of publication of the international search report:
6 November 2003

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.