



(51) International Patent Classification:
B65D 5/38 (2006.01) **B65D 5/42** (2006.01)

(21) International Application Number:
PCT/EP2009/008831

(22) International Filing Date:
10 December 2009 (10.12.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
08253965.1 11 December 2008 (11.12.2008) EP

(71) Applicant (for all designated States except US): **PHILIP MORRIS PRODUCTS S.A.** [CH/CH]; Quai Jeanrenaud 3, CH-2000 Neuchâtel (CH).

(72) Inventor: **CHATELAIN, Lucas**; Eden-Roc 11, CH-1073 Savigny (CH).

(74) Agent: **MILLBURN, Julie Elizabeth**; Reddie & Grose, 16 Theobalds Road, London WC1X 8PL (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: SLIDE AND SHELL CONTAINER WITH HINGED FLAP

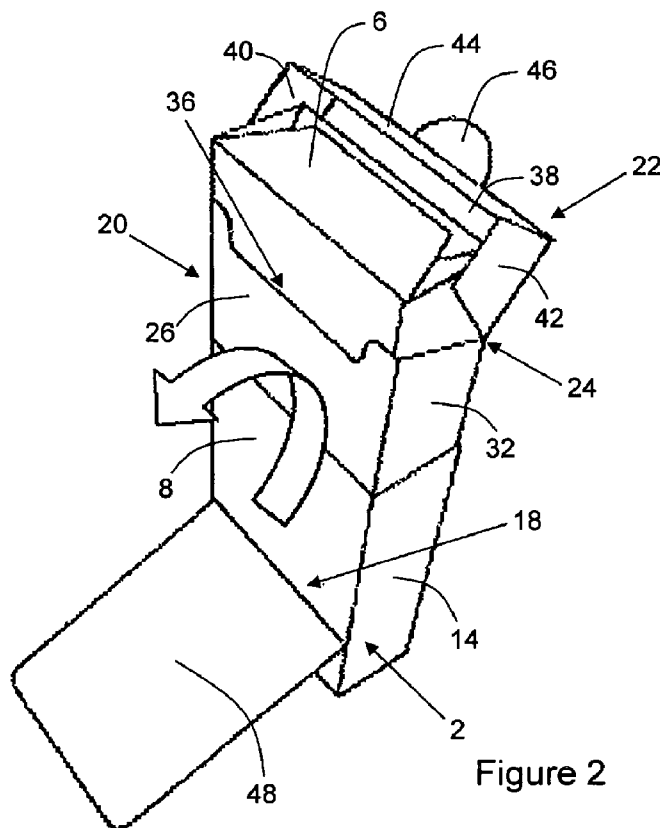


Figure 2

(57) Abstract: A slide and shell container comprises an outer shell (2) having a first wall (8) with an aperture (18) provided therein; an inner slide (4) slidable within the outer shell (2) between a closed position in which the interior of the inner slide (4) is inaccessible and an open position in which the interior of the inner slide (4) is accessible; and a hinged flap (48) connected to the inner slide (4) that protrudes through the aperture (18) in the first wall (8) of the outer shell (2). The hinged flap (48) is pivotable between a first position in which the flap (48) rests against the first wall (8) of the outer shell (2) and a second position in which the flap (48) is hinged outwardly from the first wall (8) of the outer shell (2) upon slidable movement of the inner slide (4) between the closed position and the open position.



Published:

— with international search report (Art. 21(3))

— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))