

(43) International Publication Date
16 January 2014 (16.01.2014)

(51) International Patent Classification:

B62M 3/08 (2006.01) *B62M 1/00* (2010.01)
B62M 5/00 (2006.01)

(21) International Application Number:

PCT/AU2013/000766

(22) International Filing Date:

10 July 2013 (10.07.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2012902965	11 July 2012 (11.07.2012)	AU
2012903760	31 August 2012 (31.08.2012)	AU
2012905686	31 December 2012 (31.12.2012)	AU

(72) Inventor; and

(71) Applicant : **ANDREWS, William** [AU/AU]; 69 Emerys Road, Cambewarra, New South Wales 2540 (AU).(74) Agent: **WALSH, John Richard**; Walsh & Associates, Locked Bag 2011, Glebe, New South Wales 2037 (AU).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: NEW AND IMPROVED BICYCLE PEDAL MECHANISM

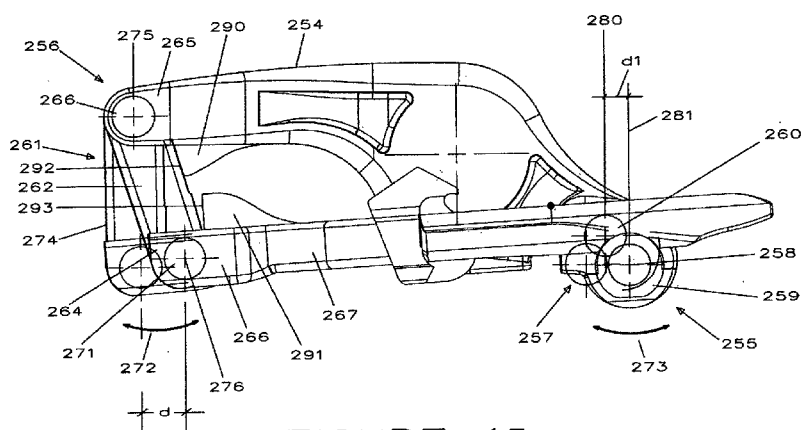


FIGURE 15

(57) Abstract: A pedal assembly mountable on a bicycle crank arm associated with a bicycle drive assembly; the pedal assembly comprising: a pedal which is operably connected to a retaining member; the retaining member including a first end and a second end and on one side a spigot which engages the crank arm to enable support of the pedal assembly by the crank arm; the pedal including a first connection which engages the first end of the retaining member and a second connection which engages the second end of the retaining member, wherein the first and second connections allow the pedal to move relative to the retaining arm during rotation of the crank arm.