



(51) International Patent Classification:
E21B 33/035 (2006.01) *E21B 23/00* (2006.01)
E21B 33/043 (2006.01)

(21) International Application Number:
PCT/US2011/022641

(22) International Filing Date:
26 January 2011 (26.01.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
12/757,348 9 April 2010 (09.04.2010) US

(71) Applicant (for all designated States except US):
CAMERON INTERNATIONAL CORPORATION
[US/US]; 1333 W Loop South, Suite 1700, Houston,
Texas 77027 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **JUNE, David** [US/
US]; 14622 Carols Way, Houston, Texas 77070 (US).

SANTILLI, Claudio [BR/US]; 17403 Turquoise Stream
Dr., Houston, Texas 77095 (US).


(74) Agent: **SWANSON, Tait, R.**; Fletcher Yoder PC, P.O.
Box 692289, Houston, TX 77269-2289 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG,
ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,

[Continued on next page]

(54) Title: TUBING HANGER RUNNING TOOL WITH INTEGRATED LANDING FEATURES

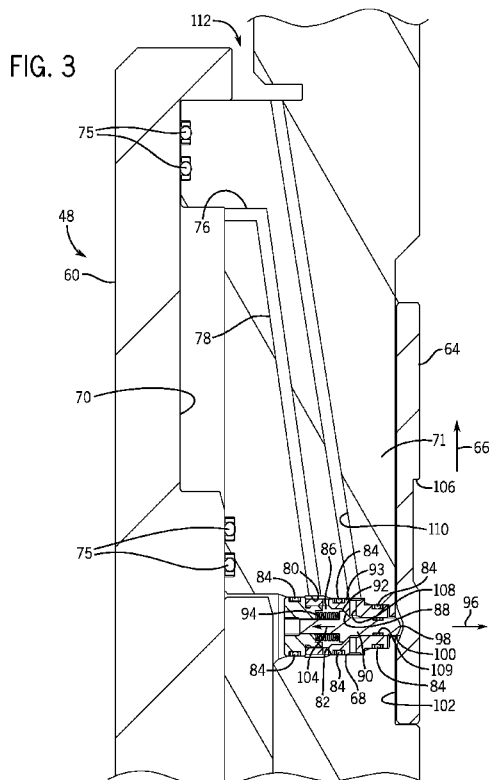

(57) Abstract: A system, in certain embodiments, includes a tubing hanger running tool (THRT) configured to position a tubing hanger within a wellhead. The THRT includes an integrated pressure equalization system including a tube having a first end in fluid communication with an annulus of the wellhead, and a second end in fluid communication with a control line. The integrated pressure equalization system also includes a piston disposed within the tube. The piston is configured to move within the tube to balance a pressure differential between a first fluid within the annulus and a second fluid within the control line.



LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:**Declarations under Rule 4.17:**

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

— *with international search report (Art. 21(3))*

— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

(88) Date of publication of the international search report:

3 May 2012