




[図1]

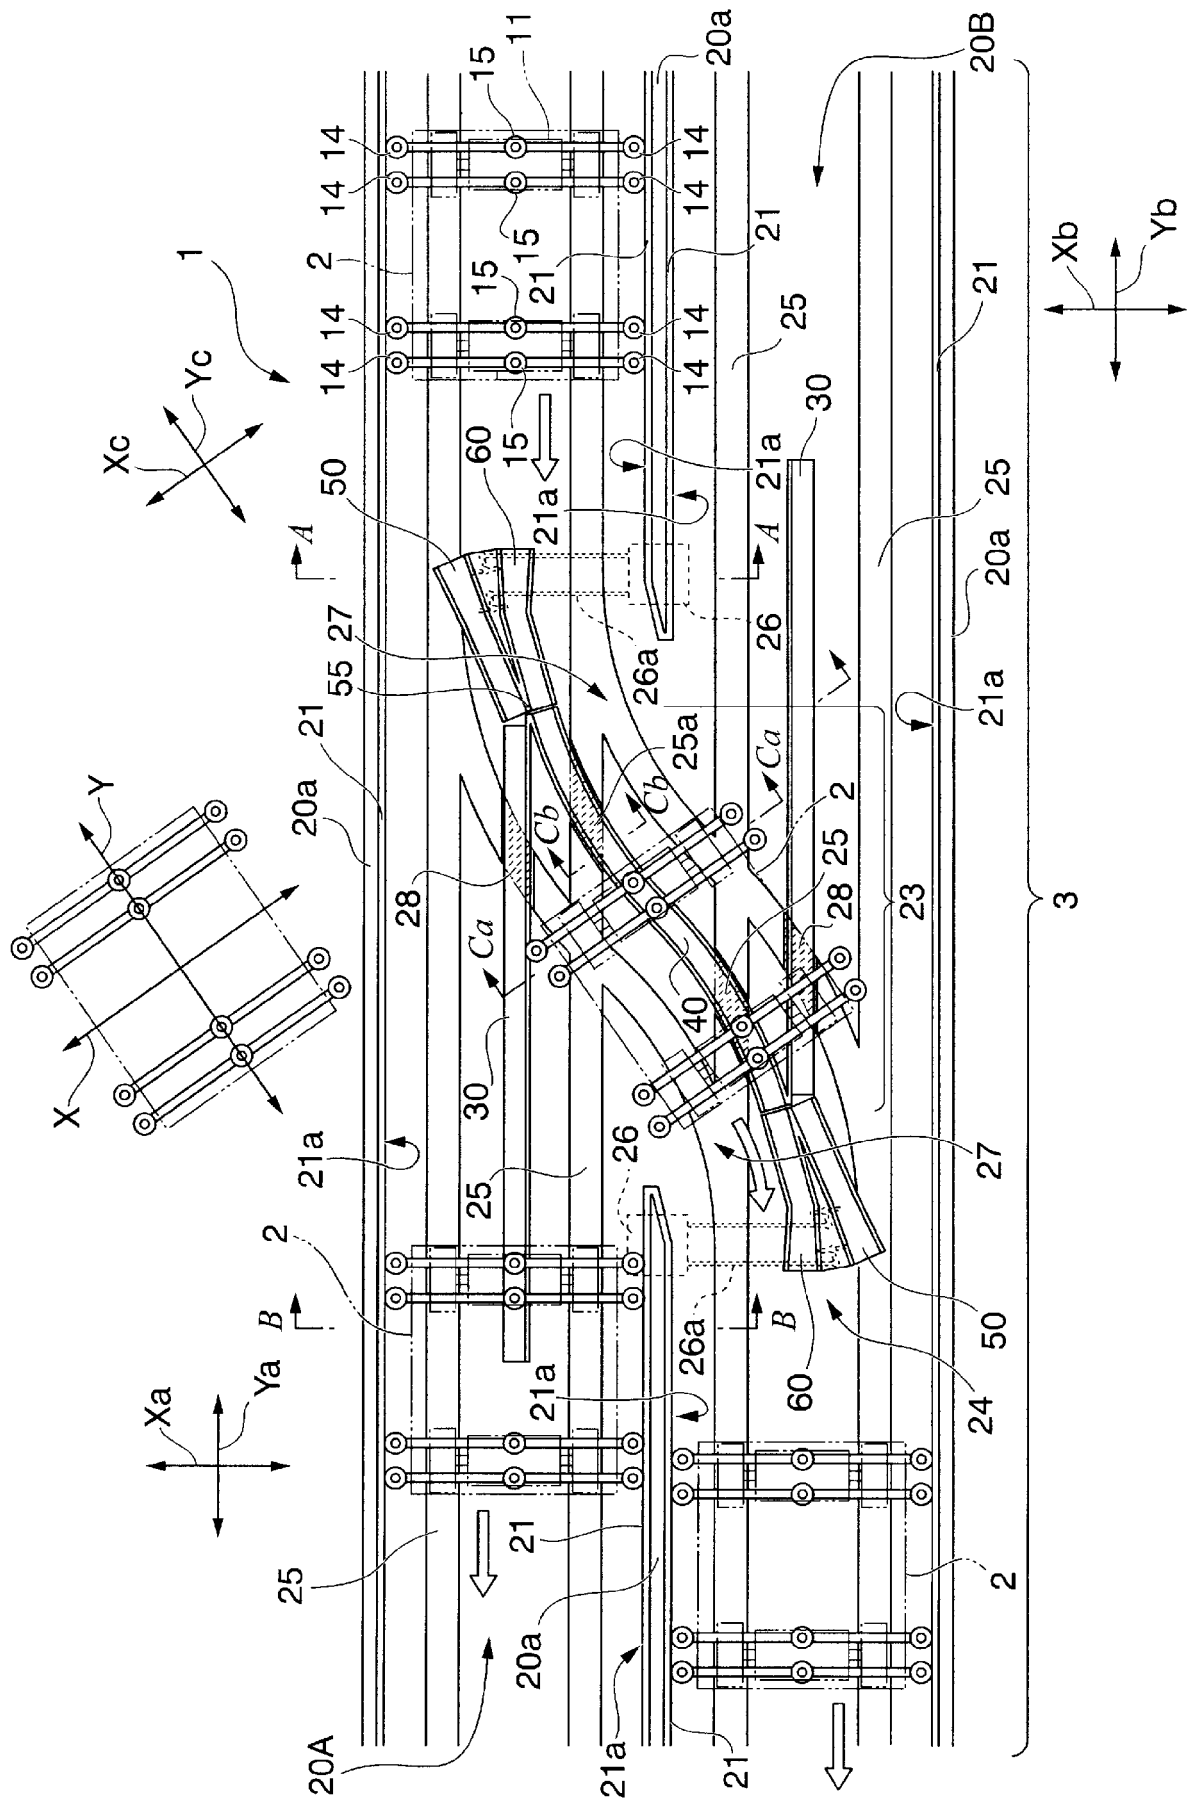


[図3]

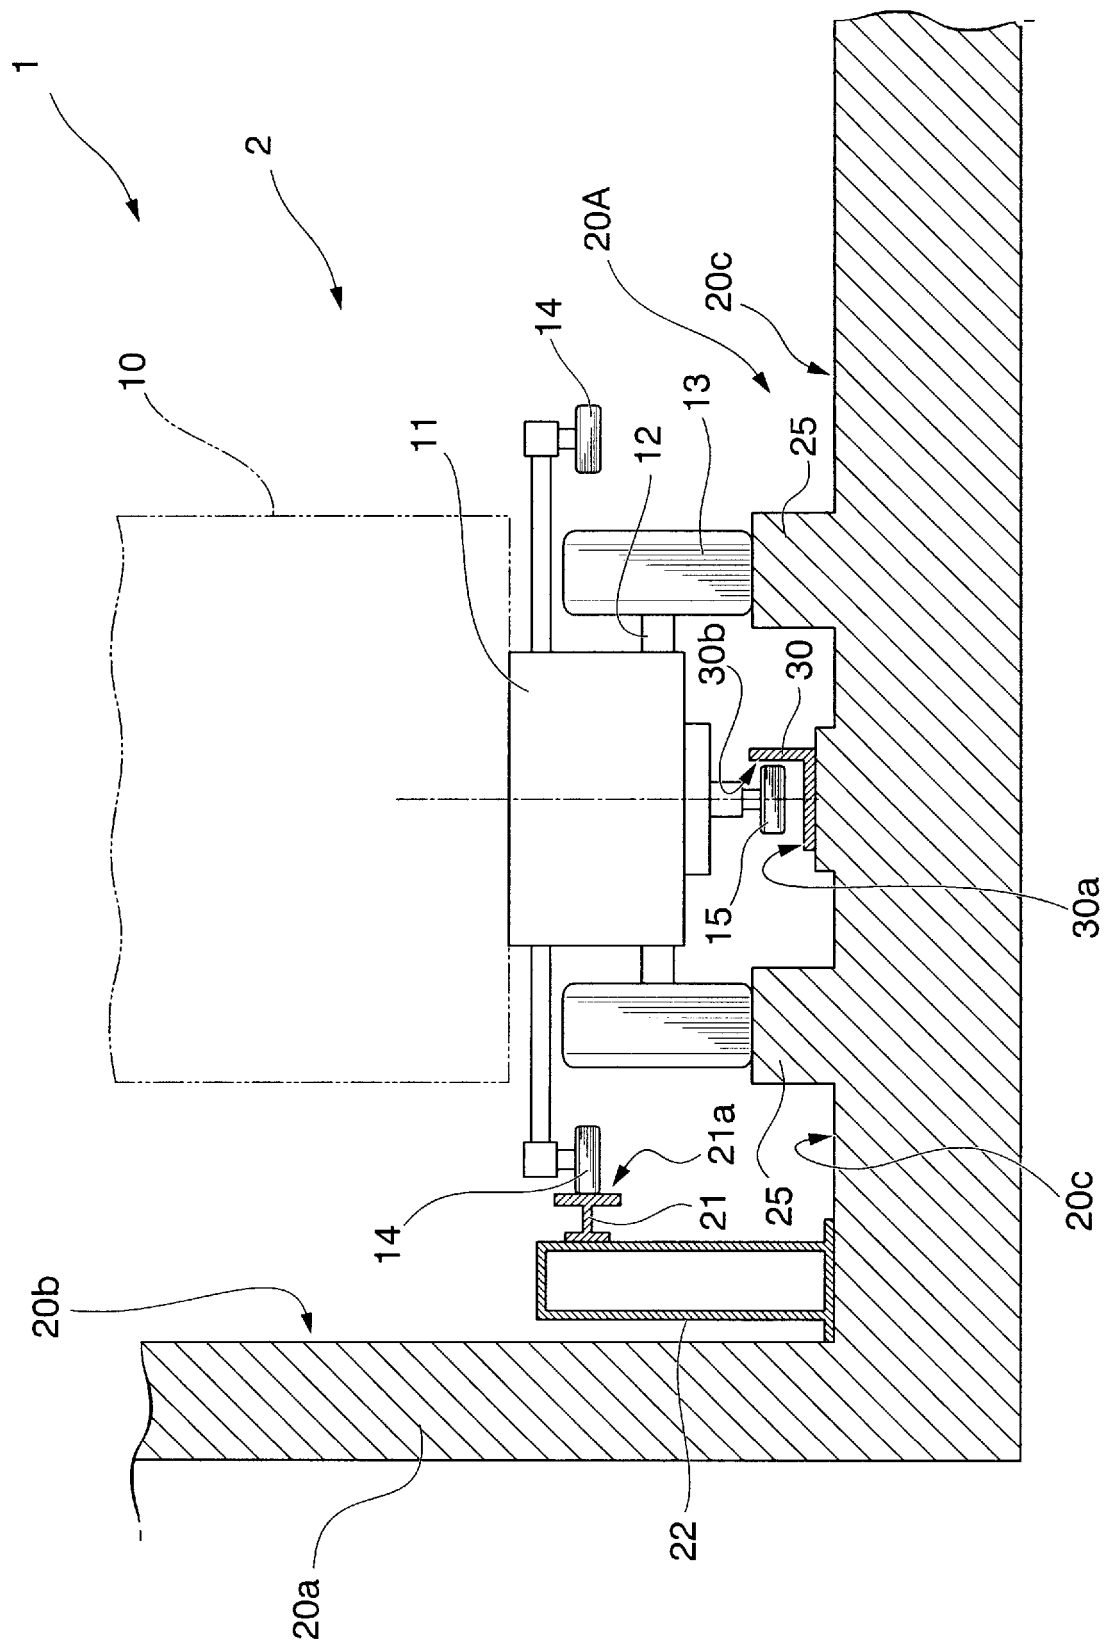

[図4A]

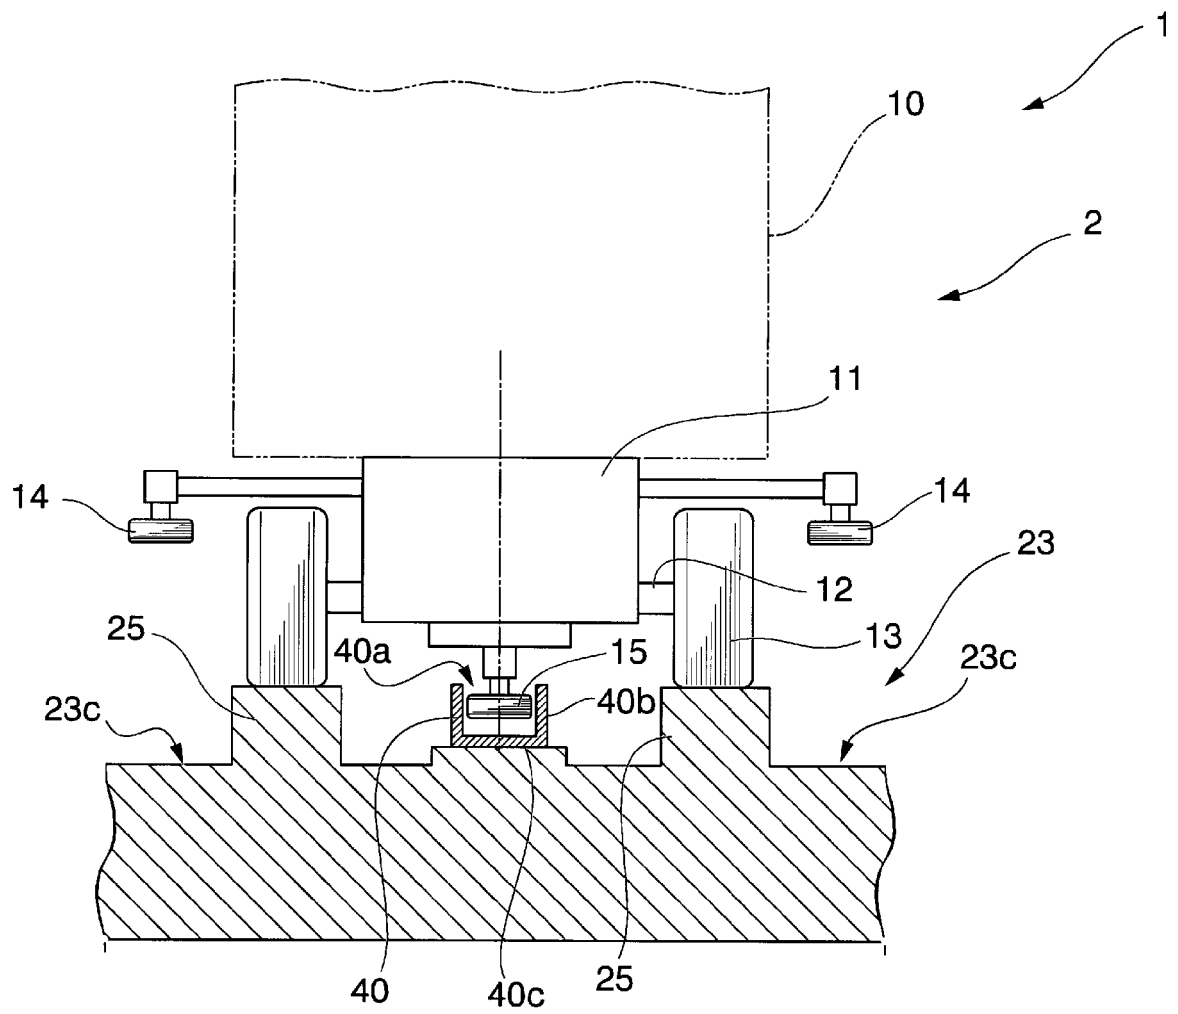


[図4B]




The figure consists of three schematic cross-sectional views labeled (a), (b), and (c), illustrating a mechanical assembly. The assembly includes several layers and components:

- (a)** Shows a top layer 3 with horizontal lines 14 and 15. Below these are vertical elements 20A and 20a connected by horizontal bars 21. A central component 50 is shown with a curved surface 60 and a base 26. To the left, a curved element 30 has parts 30a and 30b, and a lower part 40 with segments 40a and 40b. Arrows indicate movement or force.
- (b)** Similar to (a), but shows a different configuration where the vertical elements 20A and 20a are more closely spaced, and the central component 50 is positioned differently relative to the base 26 and the curved element 30.
- (c)** Shows another variation where the vertical elements 20A and 20a are further apart, and the central component 50 is positioned higher relative to the base 26 and the curved element 30.


Common labels across all views include: 2, 3, 14, 15, 20A, 20a, 21, 26, 27, 30, 30a, 30b, 40, 40a, 40b, 50, 50a, 55, 60, 60a, and 21a. Arrows indicate various directions of movement or forces applied to the components.

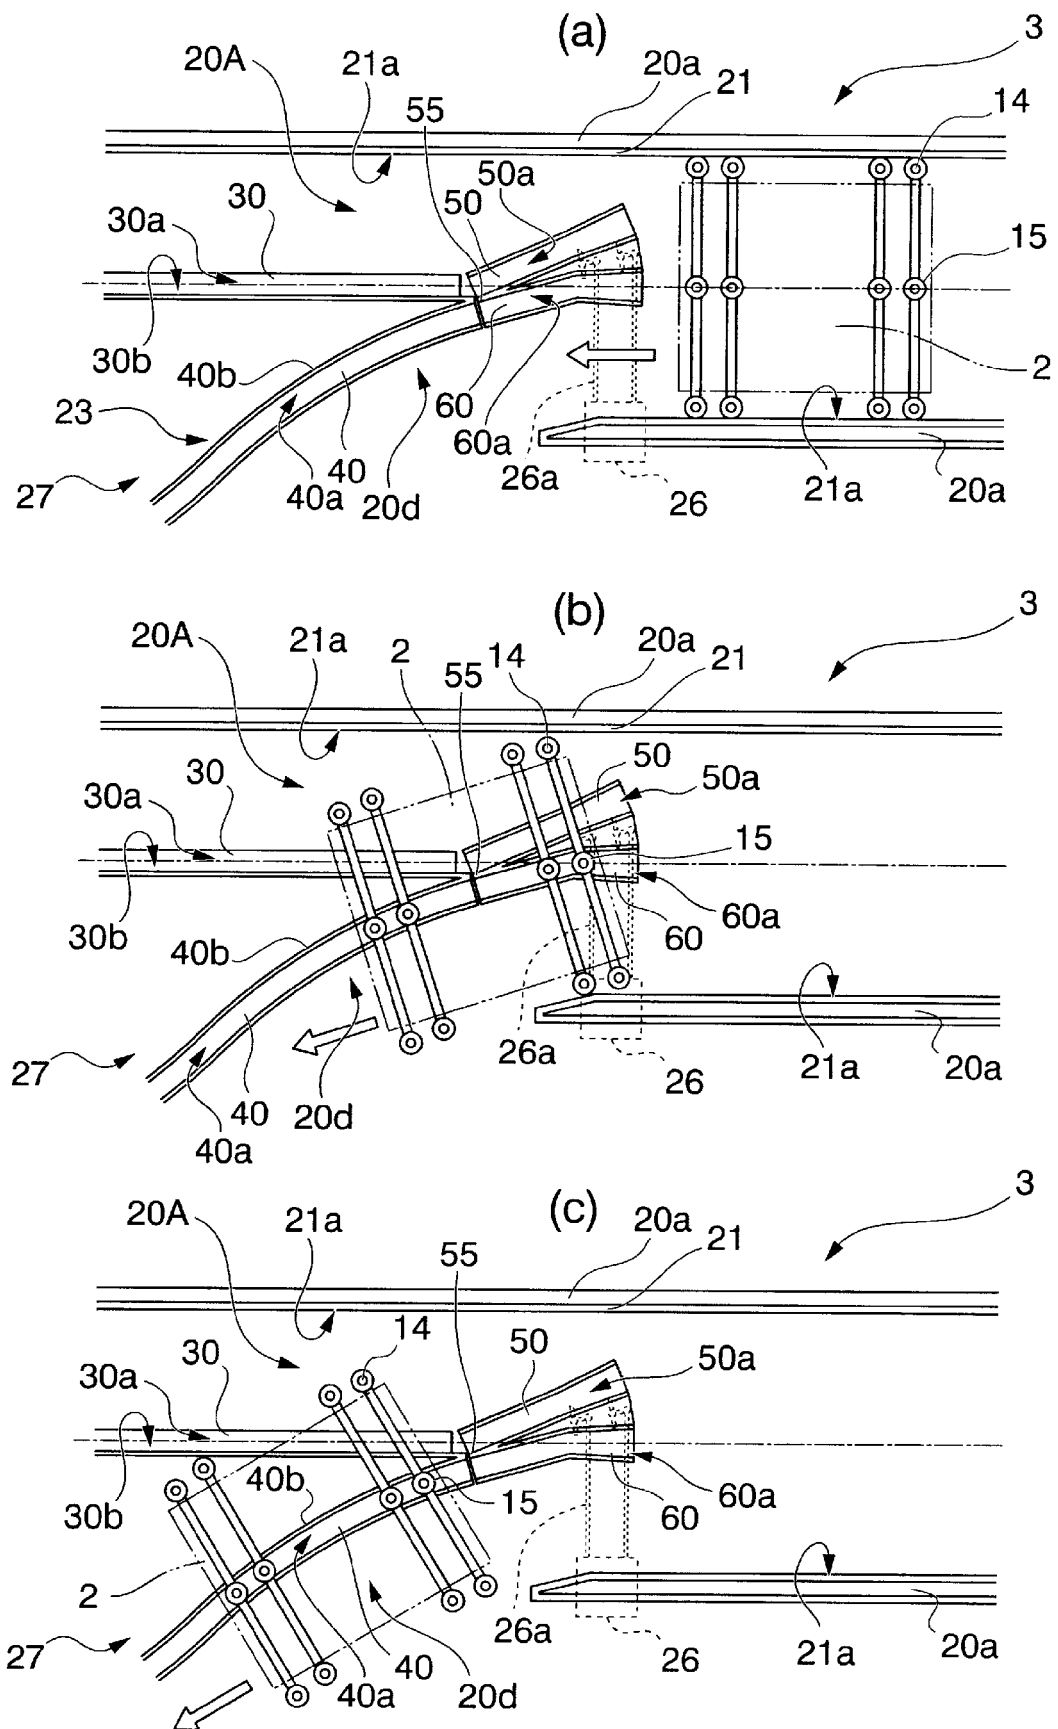


[図7]

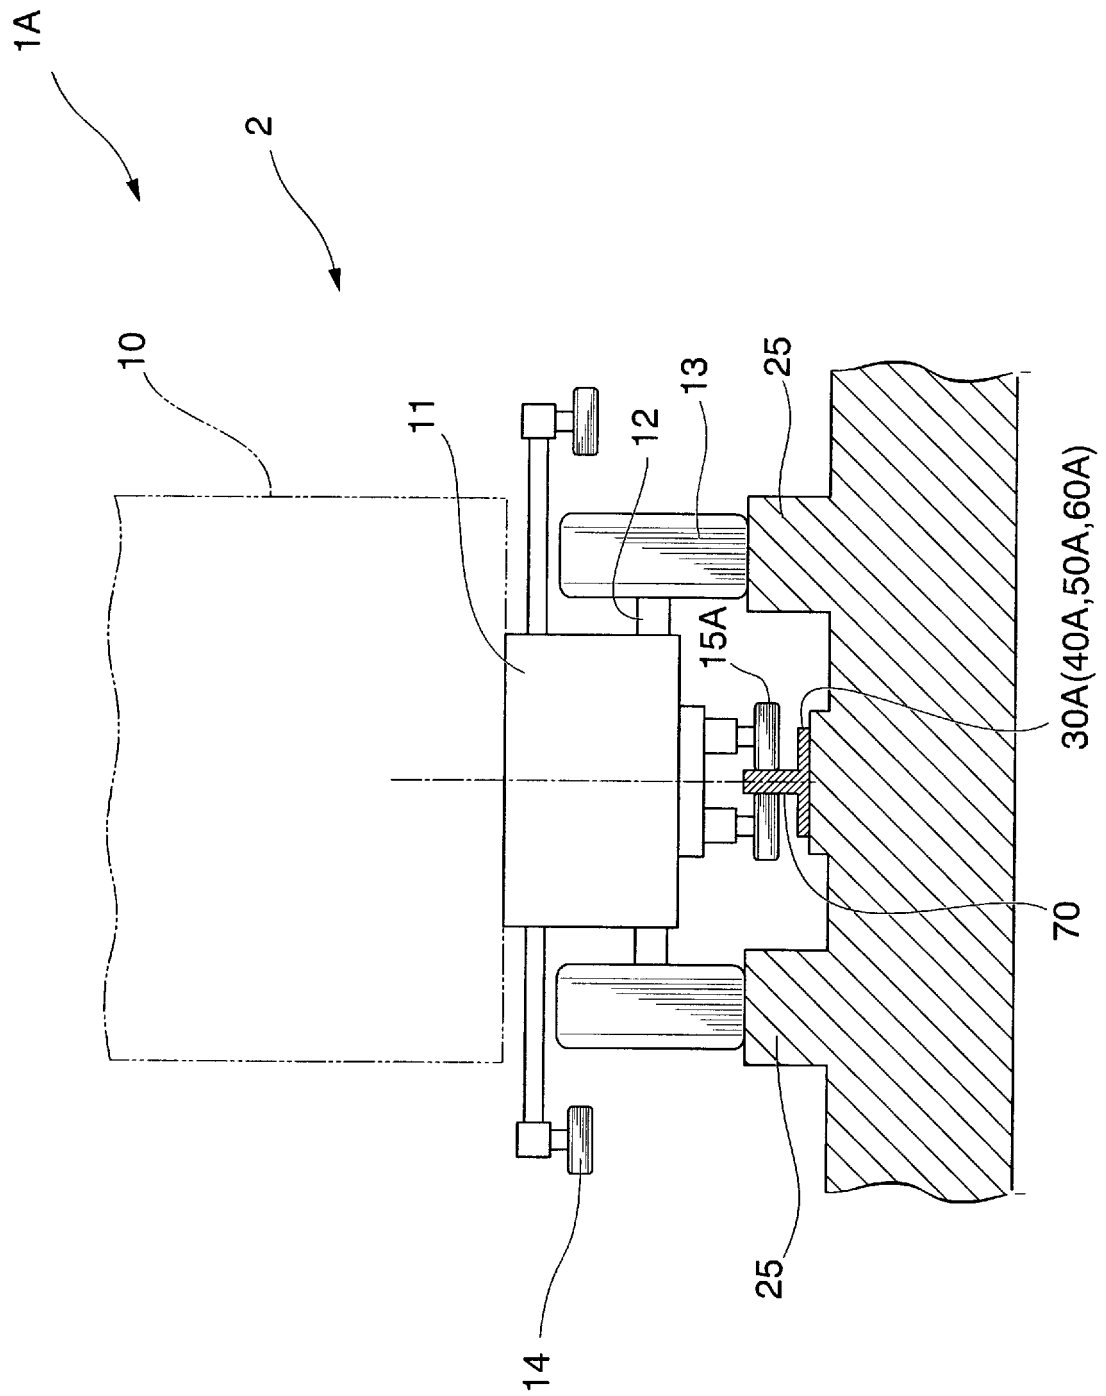


[図8]

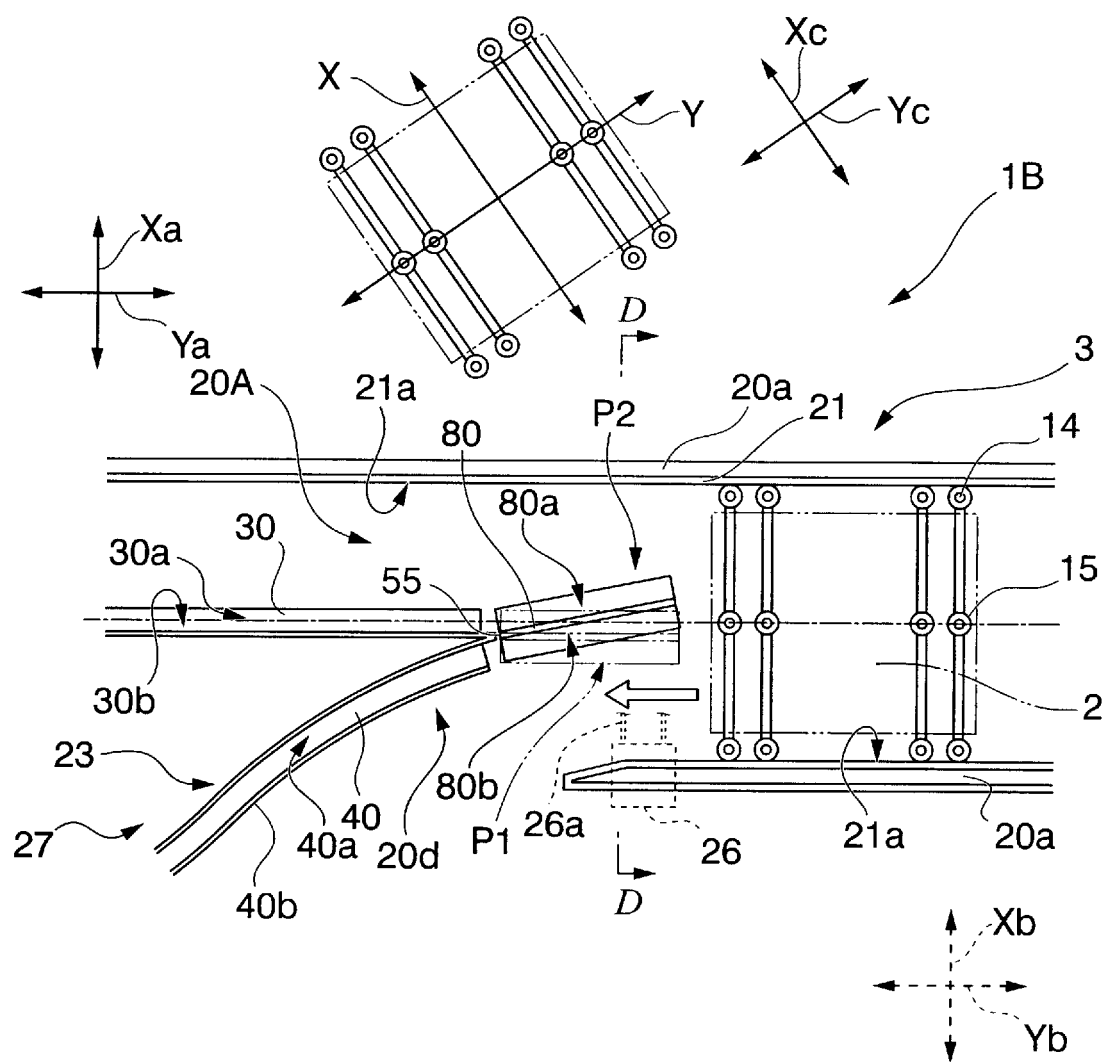


[図9]

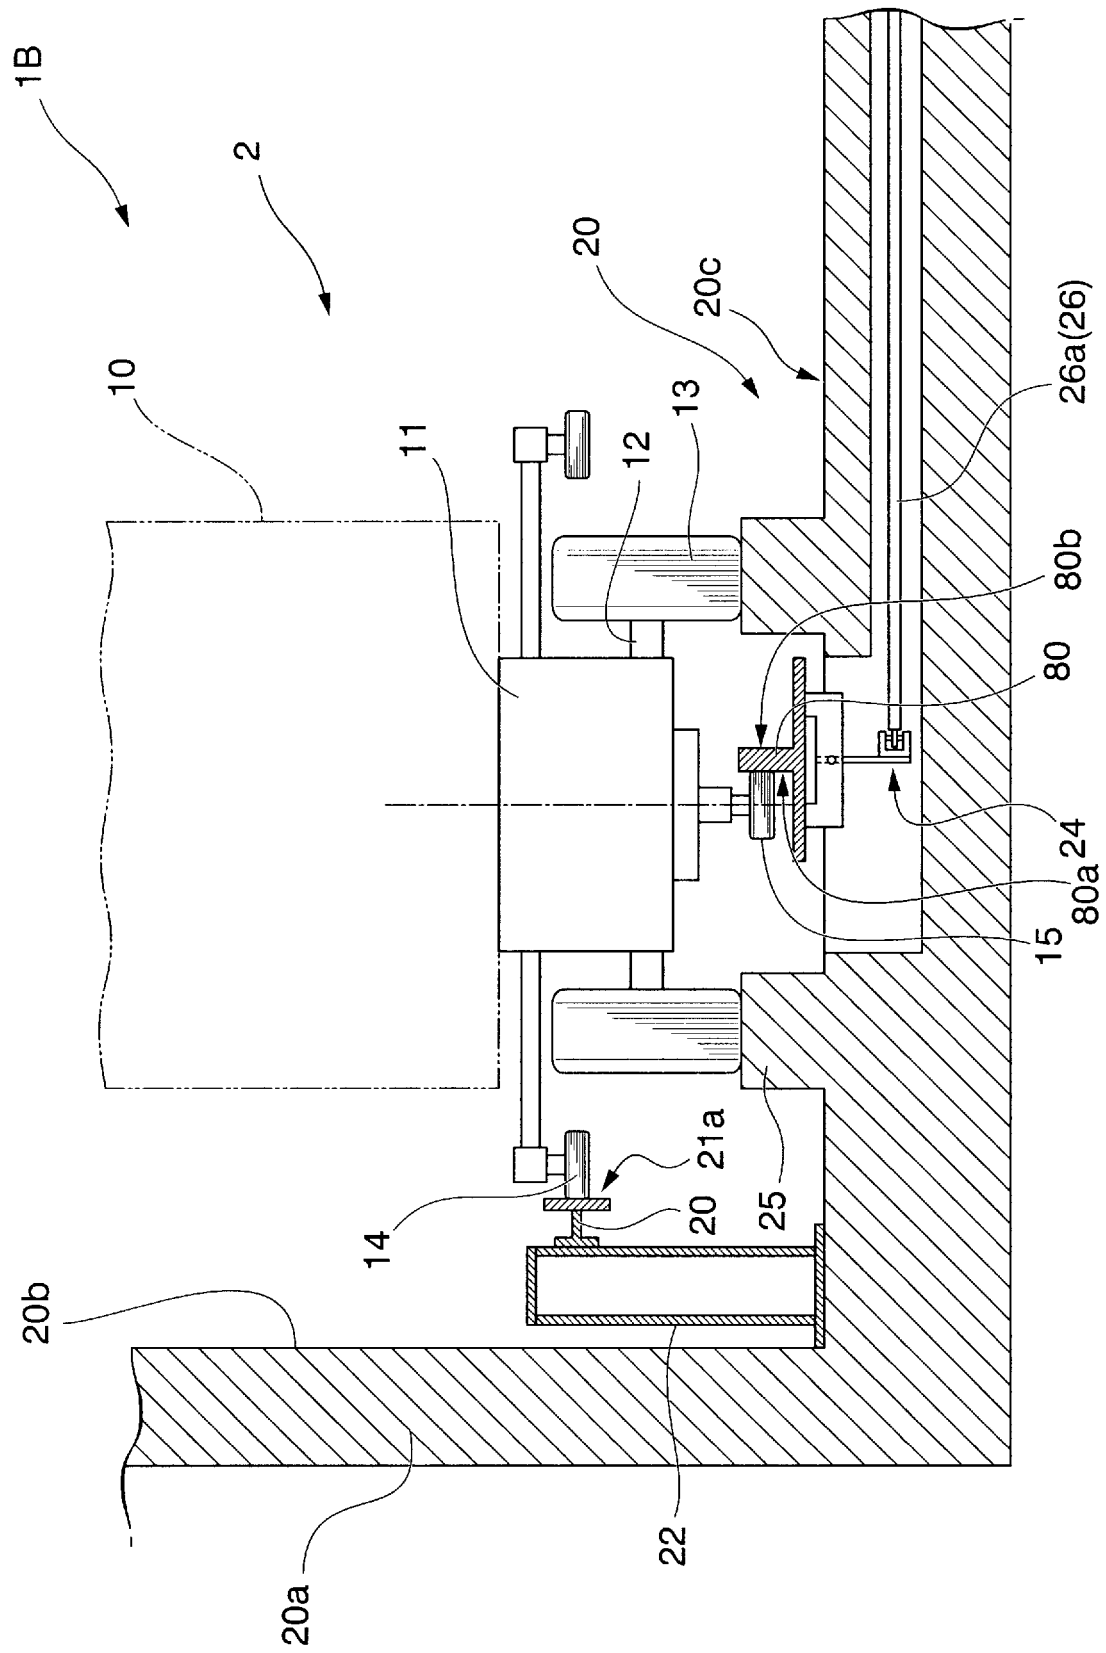

[図10]

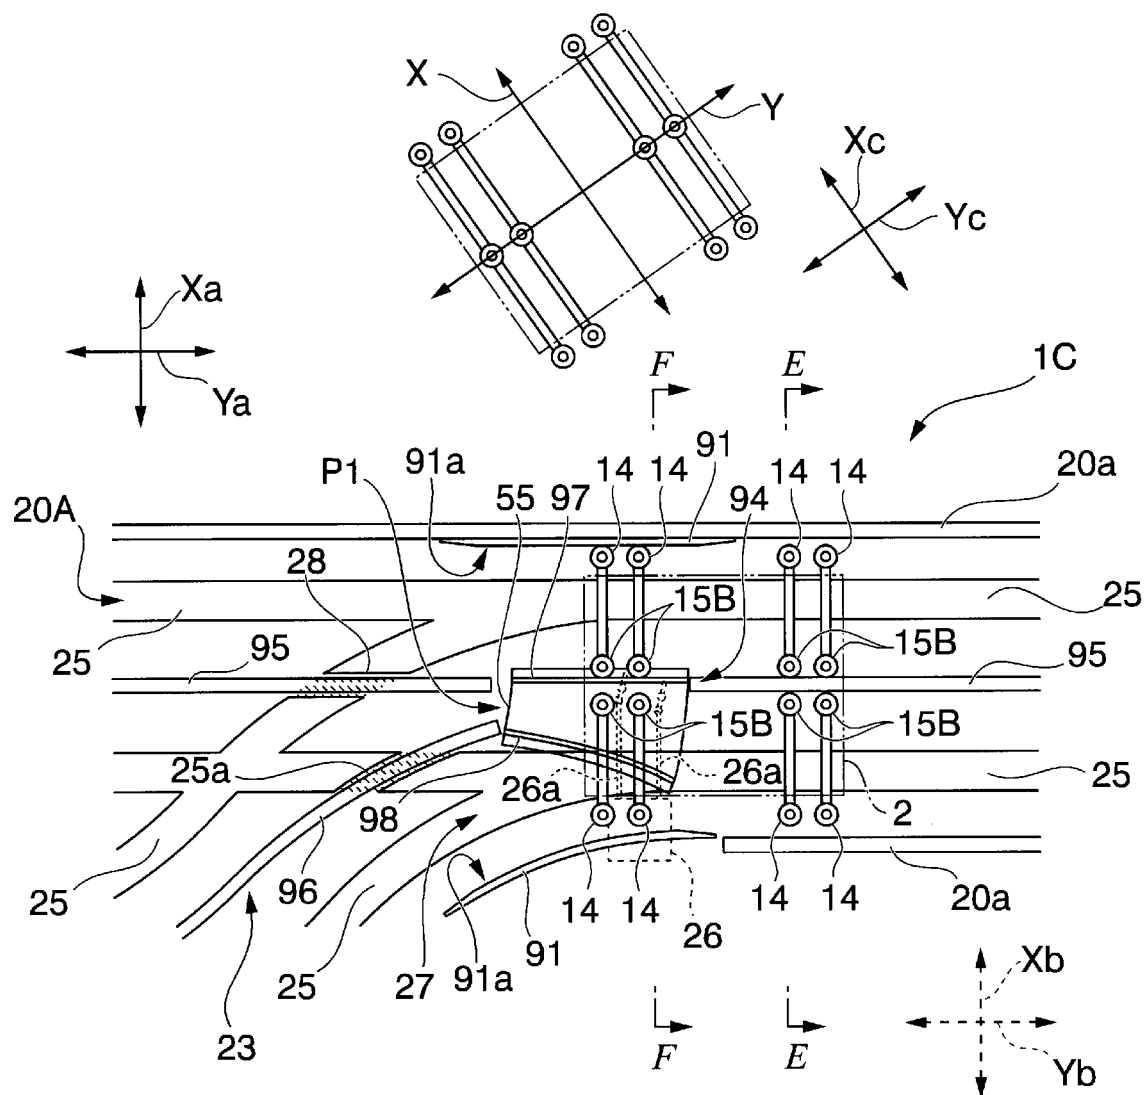

[図11]

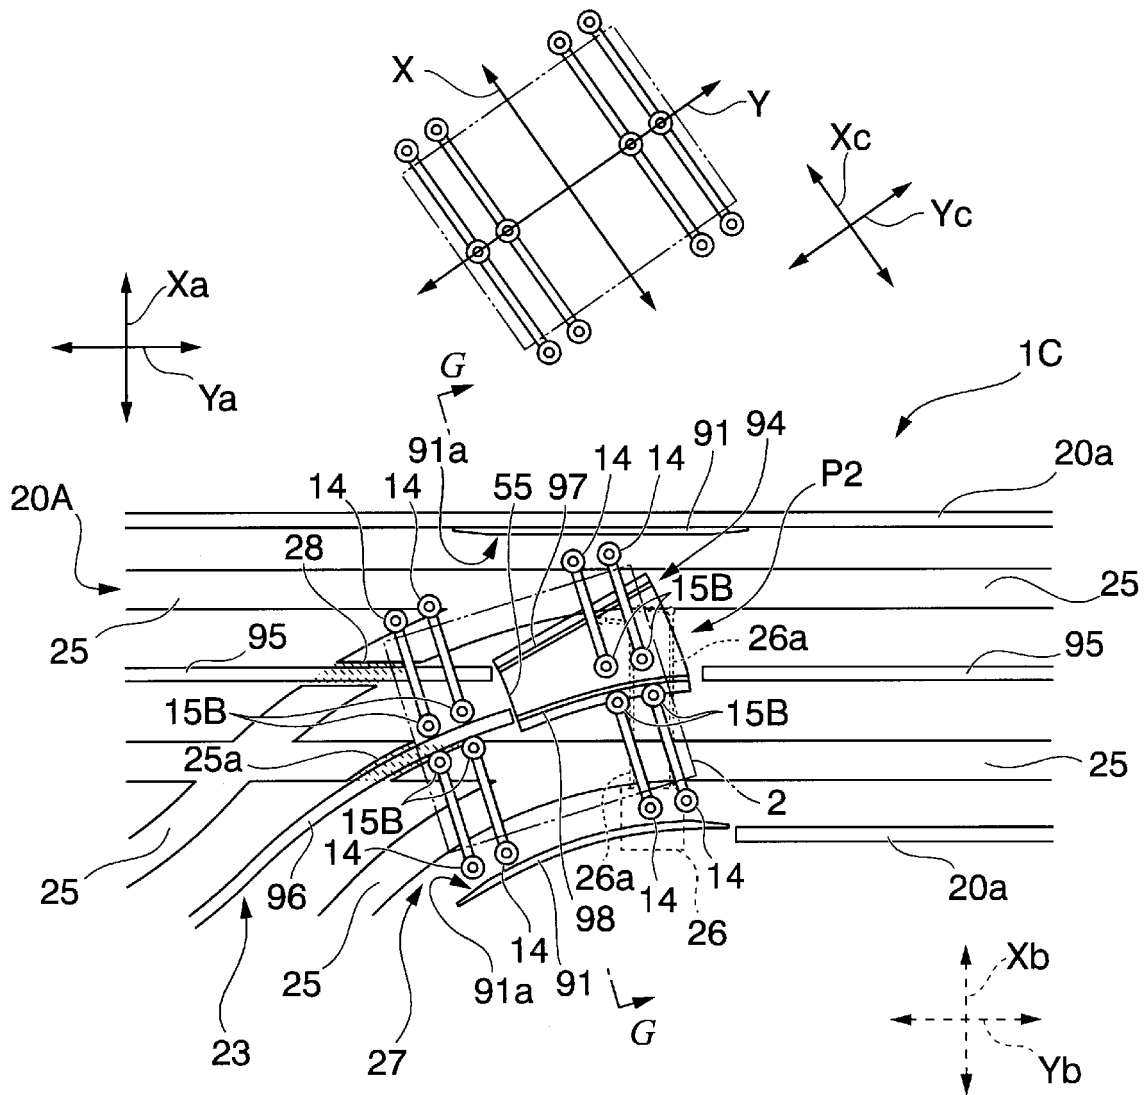

[図15]

