

SPECIFICATIONRIGHT-ANGLE BOARD TO BOARD CONNECTOR WITH ANTI-WICKING
CHARACTERISTICS AND TERMINAL FOR SAMEBackground of the Invention

5 The present invention generally relates to
surface mount connectors used for mounting on printed
circuit boards and, more particularly, to an improved
board-to-board connector with improved anti-wicking
10 solder flux into the connector during the process of
mounting the connector onto a circuit board.

Conventional surface mount connectors are used to
interconnect two printed circuit boards and typically
include two connector components, each connector component
15 having an insulative housing and a plurality of conductive
terminals arranged within the housing in a predetermined
spacing. Each of the connector terminals has a base which
extends through the housing, near the mounting surface
thereof, and further projects out of the housing to form a
20 solder tail. In mounting such connectors to a surface of
a printed circuit board, each solder tail is fixed on a
conductive circuit trace printed on a circuit board by
soldering it to the circuit trace. This soldering is
typically accomplished by aligning the connector solder
25 tails with the circuit board traces upon which a
combination of solder paste and flux have been deposited,
then passing the aligned assembly through an appropriate
heating means, such as an infrared oven, to melt the solder
and flux to thereby form a connection between the connector
30 solder tails and the circuitry of the circuit board.

In these conventional connectors, molten solder
and/or solder flux has a tendency to flow or "wick" up
along the solder tails of the terminals. As a result of
this wicking, the contact portions of the terminals may

become contaminated by the solder and/or flux. This contamination decreases the performance of the connector.

5 Some connectors are known which, at first glance, appear to have desirable anti-wicking characteristics by providing a cavity, or intervening space, between the contact and solder tail portions of its terminals, such as that described in Japanese Utility Model Publication No. 6-54273. This depicts a connector assembly having two connector components engaging each other at a right angle to each other while holding a circuit board in a horizontal plane by compressively contacting the circuit board between the two connector components. The printed circuit board mounted component of this connector assembly depicts a connector terminal having a bifurcated end in which contact and solder tail portions are separated by a narrow intervening space. Although the contact and solder tail portions of this connector are bifurcated, they are spaced symmetrically and evenly apart along their longitudinal extent. Additionally, the contact surface of this terminal is located on an interior surface of the bifurcated end of the terminal.

15 The present invention is therefore directed to a surface mount connector which overcomes the aforementioned disadvantages and which has improved anti-wicking capabilities and which further represents an improvement over the structure described in the aforesaid Japanese Utility Model Publication and other similar connectors. Moreover, the present invention is particularly suited for mounting one circuit board at an angle to another circuit board.

Summary of the Invention

25 In one principal aspect of the present invention, an electrical connector is provided with an insulative housing. The housing contains two sets of conductive terminals arranged at predetermined spacings within the housing on opposite side of a connector component-receiving

slot. Each of the terminals of one of the two terminal sets is bifurcated at one end. That is, it has spaced apart solder tail and contact portions. The solder tail portion of the bifurcated end extends out of the connector through the housing, while the contact portion thereof extends within the housing, generally in the same direction as the solder tail portion. The bifurcated portions of these terminals are separated by an intervening space which extends toward the body of the terminal. The width between the bifurcated contact and solder tail portions varies along the depth of the intervening space so that the space has an irregular nature that inhibits the flow of molten solder and/or solder flux along the solder tail portion onto the terminal contact portion.

Accordingly, it is therefore an object of the present invention to provide a surface mount electrical connector which substantially eliminates wicking of molten solder or solder flux up from a terminal solder tail portion to the terminal contact portion within the housing when soldering the solder tails of the connector onto the printed circuit board.

These and other objects, features and advantages of the present invention will be clearly understood through a consideration of the following detailed description.

Brief Description of the Drawings

In the course of the following description of the detailed description, reference will be made to the attached drawings wherein like reference numerals identify like parts and wherein:

FIG. 1 is a plan view of a terminal constructed in accordance with the principles of the present invention;

FIG. 2 is a perspective view of a female connector component utilized in the connector assembly of FIG. 4 and utilizing terminals of the type illustrated in FIG. 1;

FIG. 3 is a sectional view of the female connector component of FIG. 2 taken along lines 3-3 thereof; and,

FIG. 4 is a perspective view of an angled surface mount connector assembly utilizing the female connector component of FIG. 2.

Detailed Description of the Invention

FIG. 4 illustrates a surface mount connector assembly 100 incorporating the principles of the present invention and which is used to interconnect two circuit boards 102, 104. As seen in FIG. 4, the assembly 100 is an angled connector assembly, that is, the two circuit boards 102, 104 are held at an angle to each other (a right angle A being shown) by two connector components 2, 106. The connector components 2, 106 are preferably female or receptacle and male or plug interengaging components, meaning that the female connector component 2 includes a longitudinal slot 108 and the male connector component 106 includes a central plug or projection portion 110, which extends away from its base and is received within the engagement slot 108 of the female connector component 2.

The connector components 2, 106 are affixed to printed circuit boards 102, 104 in the orientation illustrated, by soldering them to circuit traces on the circuit boards. This detailed description will primarily be set forth in terms of the female connector component 2 of the angled surface mount connector assembly 100 illustrated, and it will be understood that the following detailed description is merely exemplary and that the Figures are not to be construed as limiting in nature, but that the present invention may be suitably modified for use with other style connectors.

FIG. 3 illustrates the female connector component 2 of the connector assembly 100 in greater detail. It can be seen that the connector component 2 includes an electrically insulative housing 3 having two opposing sidewalls 120, 121 and two endwalls 122, 123 which cooperatively define an internal male connector component-receiving engagement slot 108 therein. The sidewalls 120, 121 are illustrated as opposing top and bottom walls of the connector housing 3 in order to accommodate the male connector component 106 and its associated secondary circuit board 104 in the angled relationship shown in FIG. 4.

Returning to FIG. 3, it will be noted that the connector engagement slot 108 includes two sets 126, 127 of terminals disposed on opposite sides of a centerline C of the slot 108 (illustrated as the top and bottom inner surfaces of the slot 108). These sets 126, 127 of terminals extend lengthwise within the connector 2 along the sidewalls 120, 121, and as illustrated best in FIG. 3, they are received within respective recesses 128, 4 formed in the sidewalls 120, 121.

One set 127 of the terminals, those shown on top inner surfaces of the connector engagement slot 108, include a plurality of terminals 15 which have an elongated contact portion 130 that extends laterally within the slot 108 and recess 128. The terminals 15 also include a solder tail portion 131 which extends perpendicularly therefrom, shown vertically in FIG. 4. The contact and solder tail portions 130, 131 thereof are joined to a relatively wide terminal body portion 132 which includes a housing engagement head 133, preferably having a plurality of projections or barbs 134 thereon which interferingly contact a center post or rib 136 of the connector housing 3 in order to retain the terminals 127 in place therein. This connector center post 136 may be considered as defining the floor or depth of the connector engagement slot 108 into which the plug portion 110 of the male connector component 106 extends.

A second set 126 of terminals 1 are disposed along the opposing bottom sidewall 121 of the connector housing 3 within a series of spaced-apart recesses 4. As shown in FIG. 1, each such terminal 1 includes a relatively wide terminal body portion 13, having a connector housing engagement head 6 with upstanding projections or barbs 5 thereon which interferingly engage the connector slot center post 136 in the manner described above on the side opposite first terminal body 132 to retain the terminals 1 in place within the connector 2. A bifurcated portion is found at the other end of the terminal 1 and defines a

distinct contact portion 7 and a solder tail portion 8. The contact and solder tail portions 7, 8 are joined to the terminal body portion 13 at a bight portion 20 and are separated by an intervening space 10 which extends relatively deep into the terminal body portion 13, toward the housing engagement head 6 thereof.

In contrast to the top set of terminals 127, the contact and solder tail portions 7, 8 of bottom set 126 of terminals 1 extend in the same general direction away from body portion 13 (shown to the left in FIGS. 3 & 4) and generally parallel to each other. The solder tail portion 8 has two opposing edges: an inner edge 8a and an outer contact edge 8b which rests upon a circuit trace 112 of the circuit board 102. The contact portion 7 also has two opposing edges: an inner edge 7a which confronts the inner edge 8a of the solder tail portion 8, and an exterior contact edge 12 which defines a contact surface for the terminal 1 to engage an opposing contact surface of a terminal of the male connector component 106.

In an important aspect of the present invention, and in contrast to the bifurcated terminals described in Japanese Utility Model Publication No. 6-54273, the contact surfaces 12 and the solder tail solder surfaces 8b are disposed on exterior, opposite edges of the terminal bifurcated portion as compared to a bifurcated terminal with its contact surface disposed on an interior edge of the intervening space.

In another important aspect of the present invention, and as exemplified by the embodiment illustrated, the intervening space 10 is irregular due to the solder tail portion 8 being "stepped," or offset, from the terminal body portion 13 as illustrated, with the offset including a vertical component V and a horizontal component H, the resultant of which defines the slope or angle of an inner edge 10a of an interconnecting, ramped or inclined portion 140 of the terminal 1. The contact portions 7 of the terminals 1 also include ramped portions

142 disposed along their inner edges 7a that generally confront the ramped portions 140 of the solder tail portions 8. These ramped portions increase the surface extent of the interior edges 7a, 8a of the contact and solder tail portions 7, 8 by making them non-linear from the bight 20 to the outer ends thereof as compared to the interior edges of bifurcated end portion using a symmetrical, linear intervening space.

The intervening space 10 separating the contact and solder tail portions 7, 8 is neither symmetrical nor narrow for its entire depth D, as taught by the aforementioned prior art connectors, but rather is irregular in nature and has a width that varies along the depth D of the intervening space 10. One such variance is demonstrated in FIG. 1 by the disparate lengths of the two width indicators W_1 and W_2 .

The terminals 1 of the connector component 2 may be formed by an appropriate process, such as stamping or blanking them from a sheet of conductive metal and subsequently plating the stamped terminal with gold or similar conductivity-enhancing metal. In other words, the width of the terminals is defined by the thickness of the material from which the terminals are stamped. After stamping and plating the terminals 1, they are press-fit into the connector housing 3 until the housing engagement heads 6 thereof firmly engage the connector slot center post 136.

When mounting such a connector on a circuit board, a mixture of solder paste and flux is first applied to circuit pads 112 on the circuit board 102. The connector component 2 is then mounted on the circuit board 102 so that the solder tails 8, 131 of the connector component 2 are aligned with the circuit traces 112 of the circuit board 102 and soldered thereto, such as by passing the aligned connector and board through an infrared oven. Depending on the application of the connector component, side retaining members or fitting nails 11 may also be

soldered to the circuit board 102 to increase the strength of the connection between the connector component 2 and the circuit board 102.

5 When soldering the connector component 2 to a
circuit board 102, melted solder and/or solder flux may
encompass the lower step, i.e., the area of the solder tail
portion 8 between the inner and outer edges 8a & 8b, and
follow along the inner edge 8a to the ramped portion 10a
thereof. However, due to the offset of the ramped portion
10 10a, the increased width of the intervening space 10 of the
terminal and the depth D of the intervening space 10, the
ramped portions 10a and solder tail inner edges 8a are
spaced sufficiently apart from the confronting inner edge
7a of the contact portion 7.

15 This irregular, increased spacing increases the
capacity of the solder tail portion 8 to hold the solder
and/or solder flux around it to thereby substantially
prevent bridging of the molten solder and/or solder flux
across the intervening space 10. In addition, the shape of
20 the terminal maximizes the distance solder and/or flux must
travel before reaching the contact surface 12 thereof.
Thus, contamination of the contact portions 7 of the
terminals 1 of the connector component 2 may be effectively
prevented, keeping the connector terminal internal contact
25 edges 12 clean and free of surface contamination.

Numerous modifications may be made by those
skilled in the art without departing from the true spirit
and scope of the invention. For instance, the irregularity
of the intervening spaces 10 of the bifurcated portions 7
30 & 8 of the terminals 1 may be modified. In any case, a
similar or equivalent contamination preventing result can
be expected as long as the depth and width of the
intervening space 10 is sufficiently large.

CLAIMS:

1. An electrical connector (2) comprising a plurality of terminals (1,15) arranged in a predetermined pitch along the length of the connector (2), the terminals (1,15) being mounted in two opposing sets (126,127) within an insulative housing (3) of the connector (2), said connector housing (3) having an elongated connector component-receiving slot (108) disposed therein, each terminal (1) of one set (126) of said terminals being blanked and having a body portion (13), a contact portion (7) extending along said slot (108) for contacting a mating terminal and a solder tail portion (8) extending exteriorly of said connector housing (3) for interconnection to another circuit member, the contact and solder tail portions (7,8) being interconnected at the body portion (13), each of said terminals (1) of said one set (126) of terminals having a connector housing engagement portion (6) disposed generally adjacent one end and a bifurcated portion disposed at another end opposite the connector housing engagement portion (6), the bifurcated end portion including a distinct contact portion (7) and a distinct solder tail portion (8) separated by an intervening cavity (10), said cavity extending from a front mating face of said connector towards said one end and being at least partially defined by respective opposing, interior surfaces (7a,8a) of said contact and solder tail portions (7,8), the contact and solder tail portions (7,8) having respective contact surfaces and solder surfaces (12,8b) disposed on exterior surfaces thereof opposite said contact and solder tail portion interior surfaces (7a,8a), thereby increasing the distance which molten solder or solder flux must travel between said solder surface and said contact surface, said cavity extending at least to a rear end of said solder surface of said solder tail portion.



2. The connector as defined in claim 1, wherein the intervening cavity (10) has an asymmetrical configuration (7a,142,140,10a,8a) along its depth (D).

5 3. The connector as defined in claim 2, wherein the width (W_1, W_2) of said intervening cavity (10) between said contact portion and said solder tail portion varies along the depth (D) of said cavity (10).

10 4. The connector as defined in claim 1, wherein said solder tail portion (8) is vertically and horizontally offset (H,V) from said terminal body portion (13).

15 5. The connector as defined in claim 4, where said solder tail portion (8) includes a ramped portion (10a) intermediate said terminal body portion (13) and said solder tail solder surface (8b), the ramped portion (10a) having an inclined surface (140) extending at an angle from said solder tail solder surface (8b), the angle being
20 defined by the resultant of said vertical and horizontal offsets (H,V).

25 6. The connector as defined in claim 1, wherein said contact surface and said solder surface are generally parallel.

30 7. The connector as defined in claim 1, wherein said contact and solder tail portions (7,8) of said terminals (1) generally extend in the same direction from said body portion.

8. The connector as defined in claim 7, wherein said contact and solder tail portions (7,8) extend generally parallel to each other.



9. The connector as defined in claim 1, wherein said front mating face of said connector is positioned at an angle (A) to said circuit member to which said solder tail portions (8) are to be interconnected.

5

10. An anti-wicking terminal (1) for use in an electrical connector component (2), the terminal (1) comprising: a body portion (13), a housing engagement portion (6) for securing said terminal within a connector housing and a bifurcated end portion, the bifurcated end portion including distinct contact and solder tail portions (7,8) extending away from the body portion (13) and being separated from each other by an intervening gap (10), the intervening gap (10) being defined in part by opposing interior edges (7a,8a) of said contact and solder tail portions (7,8), said contact and solder tail portions (7,8) further having exterior edges (12,8b) spaced apart from their respective interior edges (7a,8a), a portion of said exterior edge (12) of said contact portion (7) defining a contact surface of said terminal (1) for engaging a terminal of a complementary mating connector component and a portion of said exterior edge (8b) of said solder tail portion (8) defining a solder surface of said terminal for soldering to a circuit member, the contact and solder surfaces being disposed on opposite sides of said bifurcated end portion, which thereby increases the distance which molten solder and/or flux must travel from said solder surface to said contact surface of said terminal (1) during soldering of said connector component (2), said gap extending at least to a rear end of said solder surface.

11. The terminal of claim 10, wherein said intervening gap (10) has a depth (D) which extends between said body portion (20) and outer ends of said respective contact and solder tail portions (7,8) and said contact and solder tail portion interior edges (7a,8a) are non-linear along said depth(D).

12. The terminal of claim 10, wherein said intervening gap (10) is irregular in configuration.

13. The terminal of claim 10, wherein said intervening gap (10) is asymmetrical.

14. The terminal of claim 10, wherein said solder surface is offset vertically and horizontally (H,V) from said terminal body portion (13).


15. The terminal of claim 10, wherein said terminal is blanked from sheet metal material.




ABSTRACT:**RIGHT ANGLE BOARD TO BOARD CONNECTOR WITH ANTI-WICKING CHARACTERISTICS AND TERMINAL FOR SAME**

5 A connector (2) which is particularly suitable
for angled, surface mount connections has improved anti-
solder and/or flux wicking characteristics which
substantially prevent the contamination of contact portions
(12) of the connector terminals (1). Terminals (1) for the
connector (2) are provided which have a housing engagement
10 portion (6) at one end and a bifurcated portion at the
other end. The bifurcated end portion includes a contact
portion (7) and a solder tail portion (8) which are
separated by an irregular intervening space (10) of varying
width. The depth and the varying width cooperate to
15 prevent the wicking of molten solder and/or flux to the
contact surface (12) of the terminal.

(1-3)

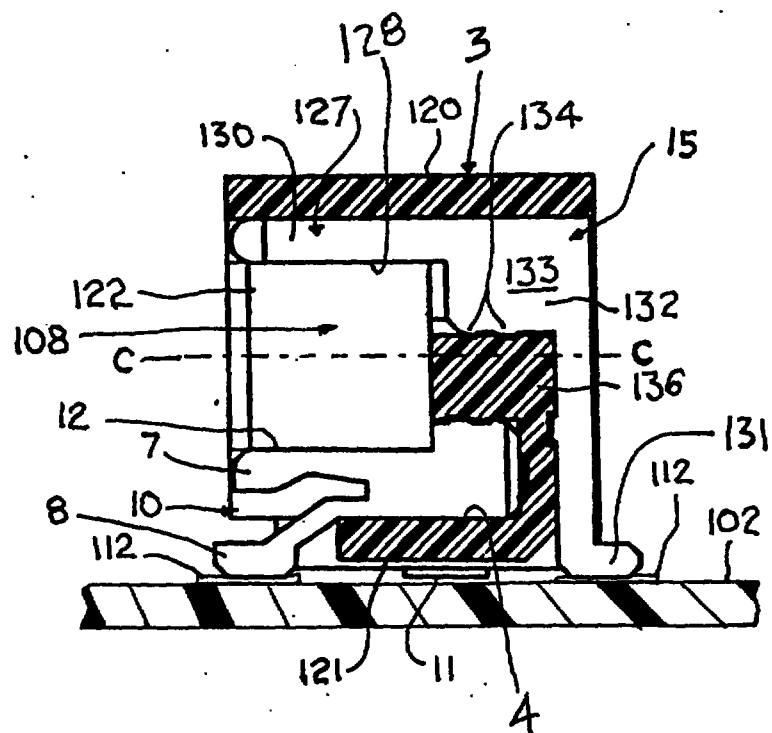

(2-3)

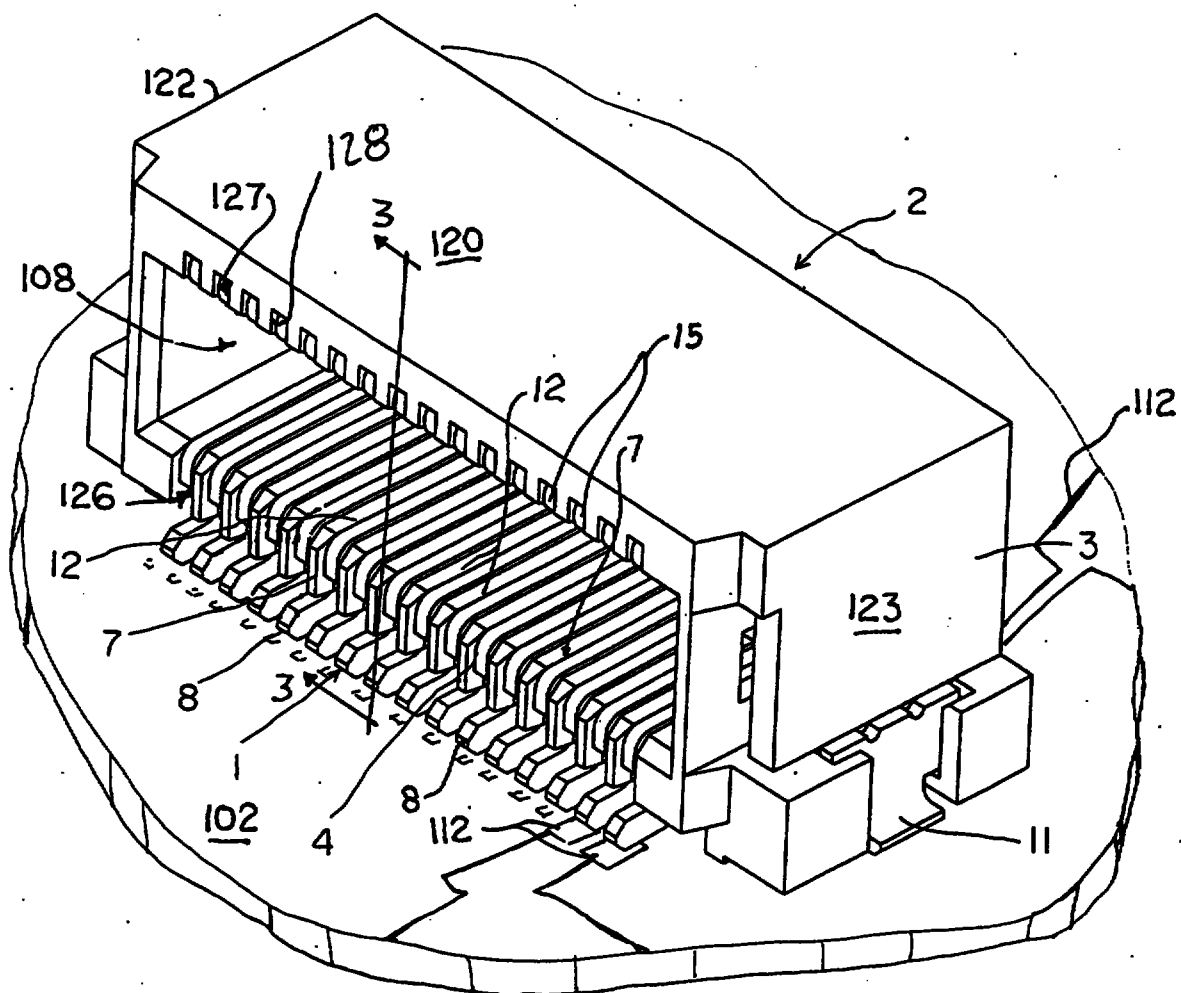

(3-3)

FIG. 4

