



- (51) **International Patent Classification:**
E21B 34/04 (2006.01) *E21B 34/16* (2006.01)
- (21) **International Application Number:**
PCT/US2012/045746
- (22) **International Filing Date:**
6 July 2012 (06.07.2012)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
13/179,213 8 July 2011 (08.07.2011) US
- (71) **Applicant (for all designated States except US):** CAMERON INTERNATIONAL CORPORATION [US/US]; 1333 West Loop South, Suite 1700, Houston, Texas 77027 (US).
- (72) **Inventor; and**
- (75) **Inventor/Applicant (for US only):** ARTEAGA, Nicolas [US/US]; 16118 Seattle Street, Houston, Texas 77040 (US).
- (74) **Agent:** ROSE, Collin, A.; Chamberlain Hrdlicka, 1200 Smith Street, 14th Floor, Houston, Texas 77002 (US).

(81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report (Rule 48.2(g))

(54) **Title:** A DOUBLE VALVE BLOCK AND ACTUATOR ASSEMBLY INCLUDING SAME

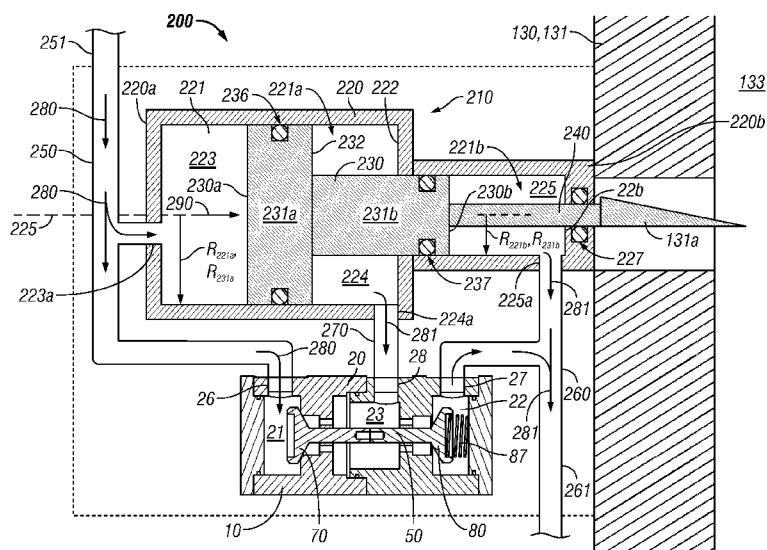


FIG. 10

(57) **Abstract:** A valve comprises a housing including a first chamber, a second chamber, and a neutral chamber. In addition, the valve comprises a stem disposed within the housing. Further, the valve comprises a first valve member at least partially disposed in the first chamber and connected to the stem and a second valve member at least partially disposed in the second chamber and connected to the stem. The first valve member has a closed position seated in a first annular valve seat and an open position spaced apart from the first valve seat. The second valve member has a closed position seated in a second annular valve seat and an open position spaced apart from the second valve seat. Moreover, the valve comprises a biasing member configured to bias the second valve member to the closed position and the first valve member to the open position.