

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
23 May 2019 (23.05.2019)



(10) International Publication Number
WO 2019/097111 A1

(51) International Patent Classification:
E05B 17/20 (2006.01) *E05B 15/00* (2006.01)
E05B 63/16 (2006.01)

(72) Inventor: **RAATIKAINEN, Juha**; Niputtajantie 28,
80710 Kontiolahti (FI).

(21) International Application Number:
PCT/FI2018/050794

(74) Agent: **BERGGREN OY**; Eteläinen Rautatiekatu 10 A,
(P.O. Box 16), 00100 Helsinki (FI).

(22) International Filing Date:
01 November 2018 (01.11.2018)

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(25) Filing Language: Finnish


(26) Publication Language: English

(30) Priority Data:
20176022 15 November 2017 (15.11.2017) FI

(71) Applicant: **ABLOY OY** [FI/FI]; Wahlforssinkatu 20,
80100 Joensuu (FI).

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH,

(54) Title: DOOR LOCK

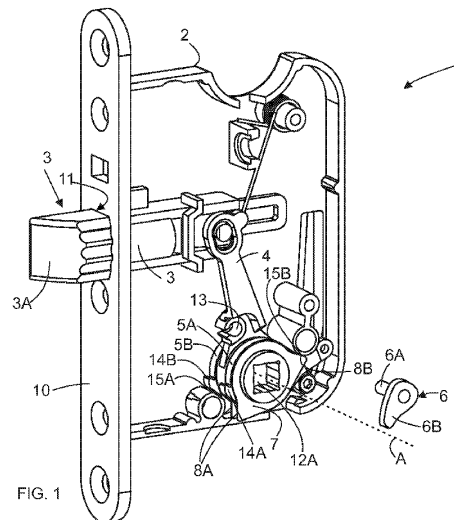

(57) Abstract: The door lock (1) according to the invention comprises a lock body (2), a bolt (3), a follower (4), a driver (5A, 5B) on both sides of the follower, and a latch solution (6) to connect at least one of the drivers (5A, 5B) in force transmission connection and out of force transmission connection with the follower (4). The door lock (1) further comprises a baffle plate (7, 7A) between the follower (4) and the driver (5A, 5B) at least on one side of the follower. The baffle plate (7, 7A) comprises at least one support surface (8A, 8B, 8C), which is set against the lock body (2) or against a part which is connected to the lock body in a fixed manner. The baffle plate can thus not be rotated in relation to the lock body (2). A baffle plate which cannot be rotated prevents turning force from being transmitted from the driver to the follower.

[Continued on next page]

GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*