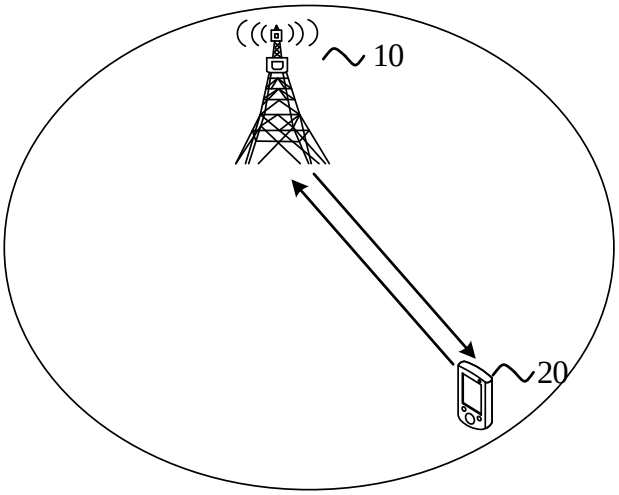
10
20

FIG. 1

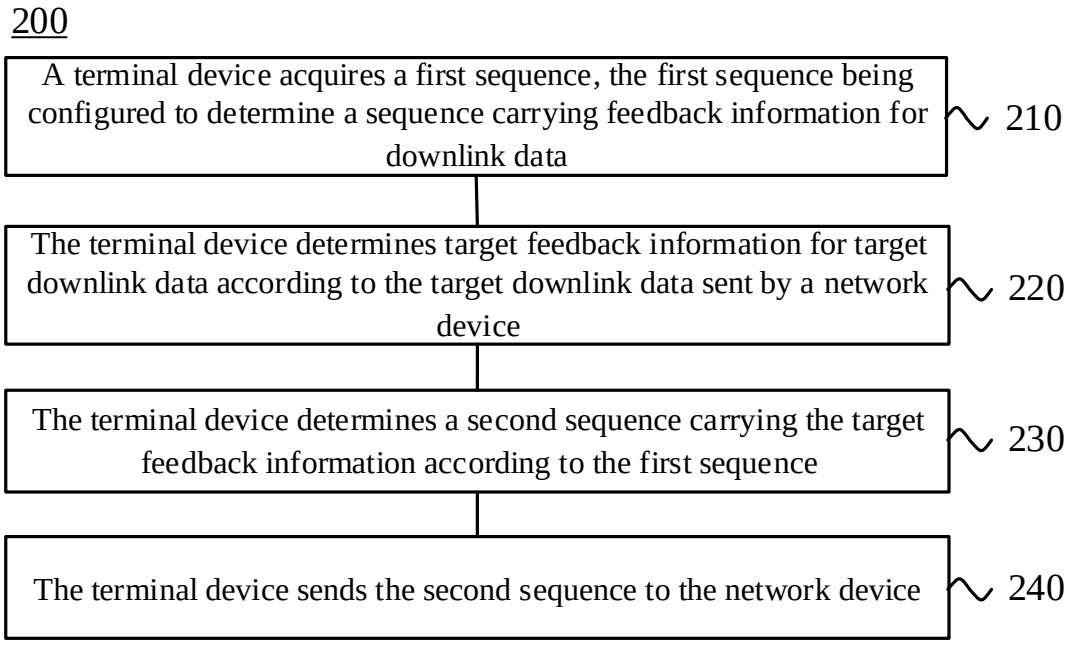
200
A terminal device acquires a first sequence, the first sequence being configured to determine a sequence carrying feedback information for downlink data
210
The terminal device determines target feedback information for target downlink data according to the target downlink data sent by a network device
220
The terminal device determines a second sequence carrying the target feedback information according to the first sequence
230
The terminal device sends the second sequence to the network device
240

FIG. 2