



(51) International Patent Classification:
H02G 3/22 (2006.01)

(21) International Application Number:
PCT/EP2011/065803

(22) International Filing Date:
13 September 2011 (13.09.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
1050971-9 17 September 2010 (17.09.2010) SE
1100176-5 11 March 2011 (11.03.2011) SE

(71) Applicant (for all designated States except US): **Roxtec AB** [SE/SE]; Box 540, SE-371 23 Karlskrona (SE).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **MILLEVIK, Bo** [SE/SE]; Kuggebodavägen 100, SE-372 94 Listerby (SE).

(74) Agent: **STRÖM & GULLIKSSON AB (Lund)**; Box 793, SE-220 07 Lund (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,


CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: MODULAR CONNECTOR FOR CABLES OR PIPES AND SYSTEM COMPRISING SUCH MODULAR CONNECTOR

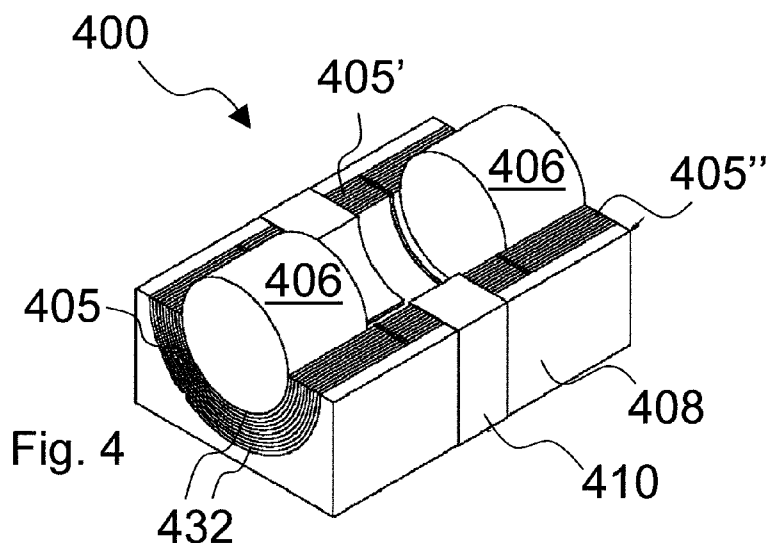

(57) Abstract: A modular connector for cables and pipes has a compressible body (208) with an axial groove provided therein for arrangement of a shielded cable extending from a first end to a second end, and the groove is dimensioned or dimensionable to sealingly fit around a circumference of the shielded or armored cable or the pipe. The connector (200) further comprises a conductor arrangement arranged between the first end and the second end, the conductor arrangement may be sandwiched between the compressible body (208) and a cable screen or armor of the cable or the pipe. The conductor arrangement (210) further extends to an outside of the modular connector (200).

