(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
10 March 2005 (10.03.2005)

PCT

(10) International Publication Number
WO 2005/021074 A1

(51) International Patent Classification[7]: A61M 16/00, 16/20

(21) International Application Number:
PCT/NL2004/000606

(22) International Filing Date:
1 September 2004 (01.09.2004)

(25) Filing Language: Dutch

(26) Publication Language: English

(30) Priority Data:
1024206 1 September 2003 (01.09.2003) NL

(71) Applicant *(for all designated States except US)*: **THINK GLOBAL B.V.** [NL/NL]; Jansweg 26-28, 1e etage, NL-2011 KN Haarlem (NL).

(71) Applicant and
(72) Inventor: **LUGTIGHEID, Gerardus, Wilhelmus** [NL/NL]; Dilledonk Noord 23, NL-3206 BW Spijkenisse (NL).


(74) Agent: **WINCKELS, J., H., F.**; Vereenigde, Johan de Wittlaan 7, NL-2517 JR Den Haag (NL).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH,

[Continued on next page]

(54) Title: MANUALLY OPERATED APPARATUS, AND BALLON UNIT AND VALVE HOUSING FOR A MANUALLY OPERATED RESPIRATION APPARATUS

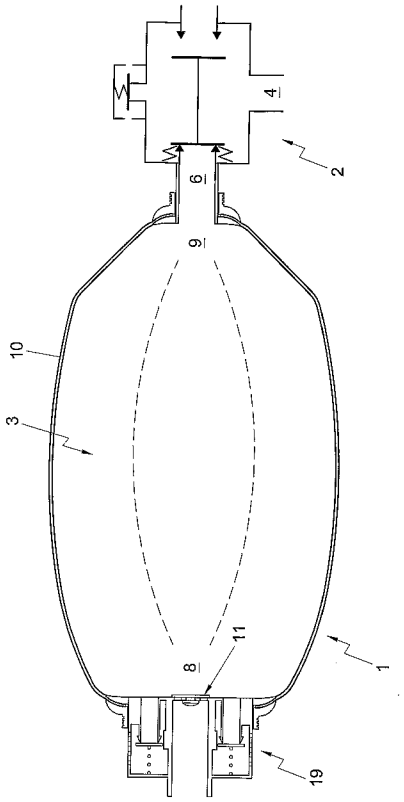

(57) Abstract: A manually operated respiration apparatus (1), comprising a respiration housing (2), provided with a respiration channel (4) for connection with a patient to whom artificial respiration is to be applied, which respiration channel (4) is connected via a valve system (5) with an inflow port (6) connected to a balloon unit (3) for supplying air to the patient via the respiration channel (4) and with an outflow port (7) for evacuation of air exhaled by the patient into the respiration channel (4) to the environnient, wherein the balloon unit (3) comprises a resilient bellows (10) provided with an inlet opening (8) and an outlet opening (9), wherein, further, in the inlet opening (8) of the bellows (10), a non-return valve (11) is included and wherein the outlet opening (9) of the bellows (10) is connected with the inflow port (6) of the respiration housing (2). Upon squeezing the bellows (10), from a starting position, air enclosed by the bellows (10) exits via the outlet opening (9) and, upon releasing the bellows (10), it rebounds to the starting position by sucking in environmental air via the inlet opening (8). The bellows (10) is provided with.

WO 2005/021074 A1

GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.