



(51) International Patent Classification:

B31F 1/28 (2006.01) **B31F 5/04** (2006.01)
B32B 7/14 (2006.01) **B32B 29/08** (2006.01)

(21) International Application Number:

PCT/NZ2009/000085

(22) International Filing Date:

26 May 2009 (26.05.2009)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

568698 27 May 2008 (27.05.2008) NZ

(71) Applicant (for all designated States except US): **COR-CEL IP LIMITED** [NZ/NZ]; c/o Level 12, KPMG Centre, 85 Alexandra Street, Hamilton, 3204 (NZ).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **VAN BERLO, Patrick Petrus Antonius Maria** [NL/NZ]; 22 Rangatira Street, Karapiro, Cambridge, 3494 (NZ).

(74) Agents: **WILSON, Kathryn, S** et al.; James & Wells Intellectual Property, Private Bag 3140, Hamilton, 3240 (NZ).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: METHOD OF FORMING SINGLE FACE CORRUGATED BOARD

FIGURE 1A

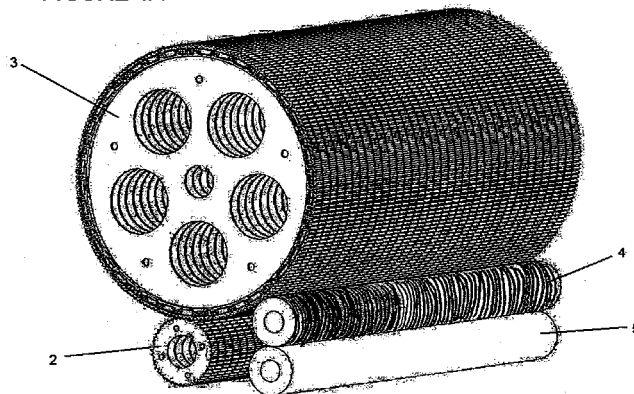

(57) Abstract: A method of bonding a substantially planar sheet material to a corrugated sheet material using an automated process the method characterised by the steps of a) applying adhesive in discrete amounts to the contact points of the corrugated sheet material, and b) holding the sheet materials together until a bond is formed between them.