

FIG. 1

Send first indication information to a terminal, where the first indication information indicates, by using a bitmap, a transmission resource for detection by the terminal, and the transmission resource is an LBT subband of a bandwidth part BWP or a component carrier CC in carrier aggregation

201

FIG. 2

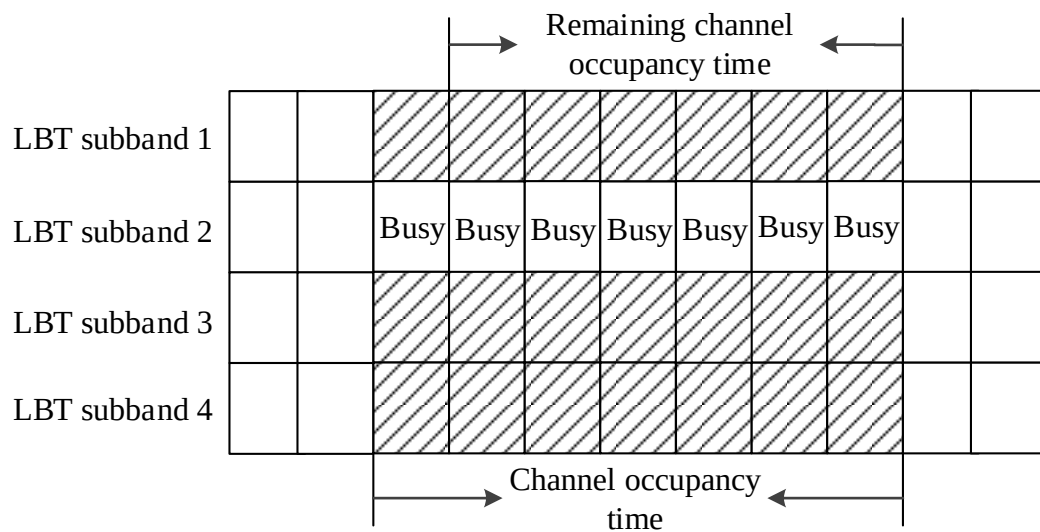


FIG. 3

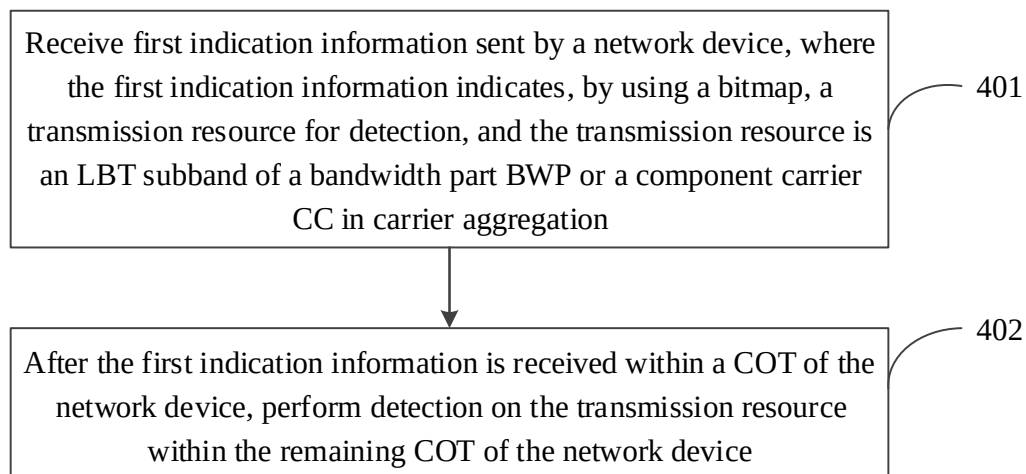


FIG. 4

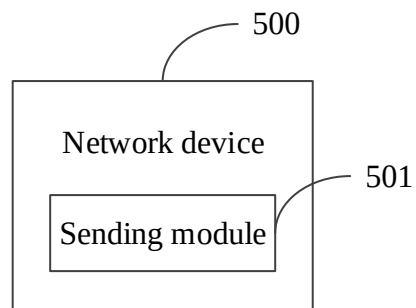


FIG. 5

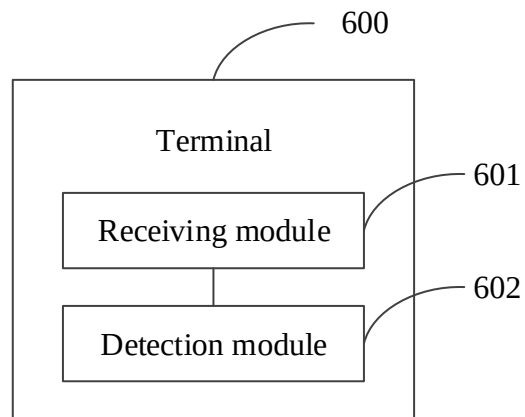


FIG. 6

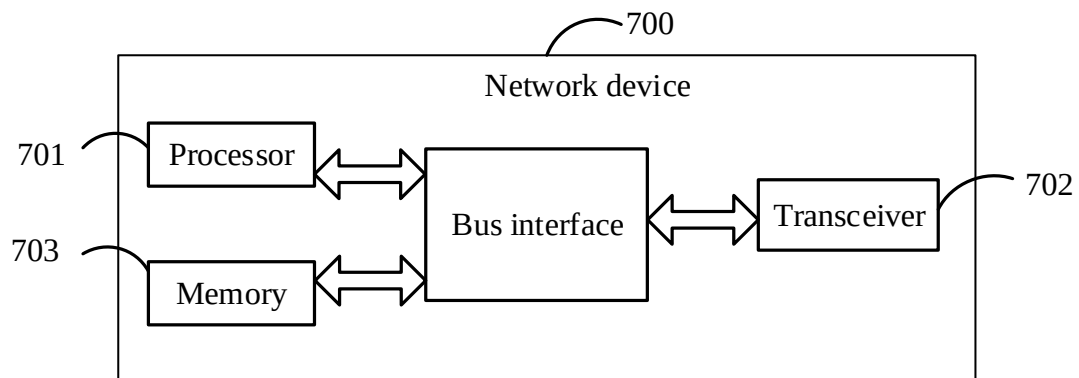


FIG. 7

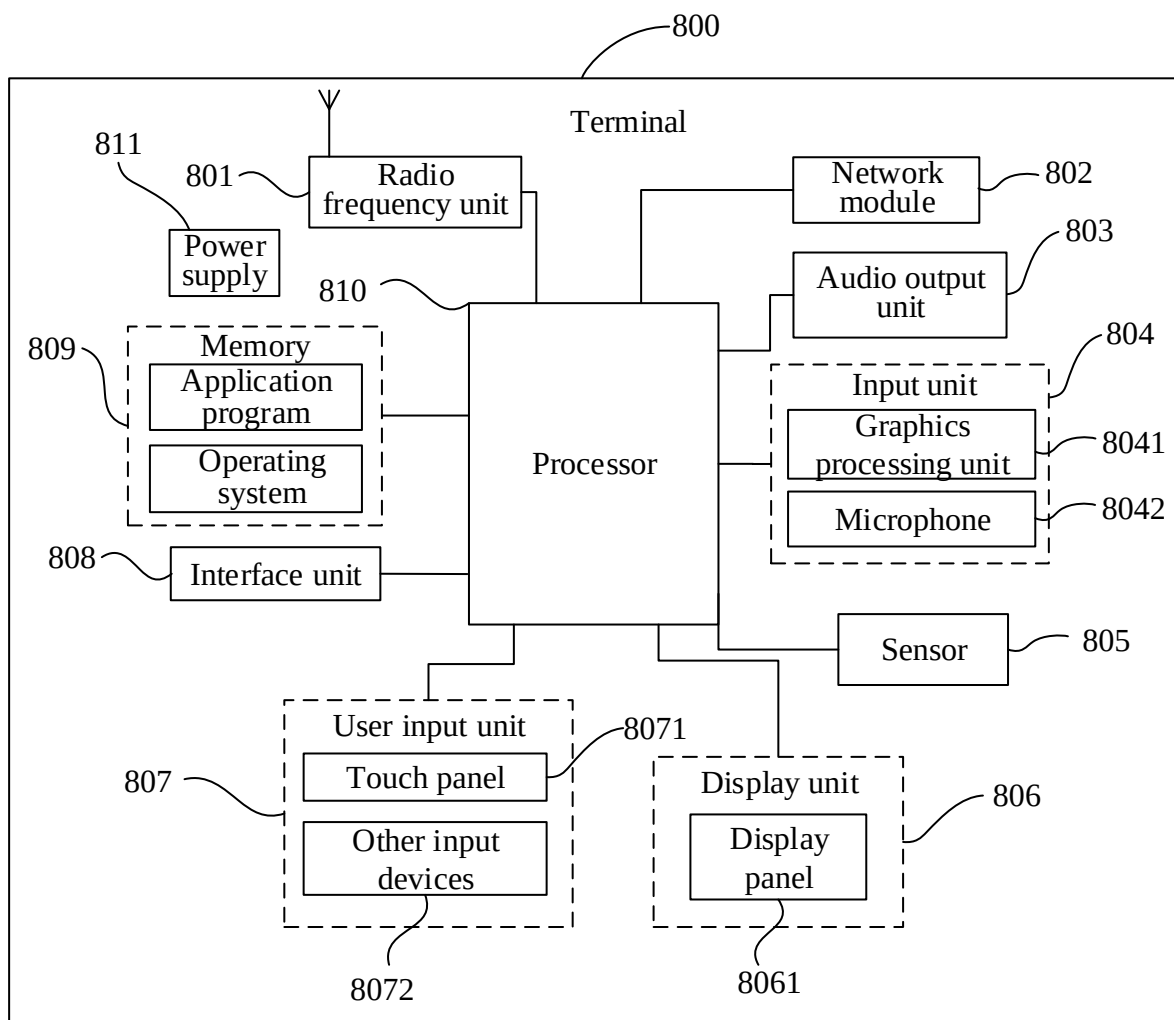


FIG. 8