

04/02/04

2004005386

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

CORRECTED VERSION



162162

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
20 February 2003 (20.02.2003)

PCT

(10) International Publication Number
WO 03/013729 A3(51) International Patent Classification⁷: D02G 3/00,
B01D 53/34, F23D 21/00

(21) International Application Number: PCT/US02/23305

(22) International Filing Date: 23 July 2002 (23.07.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/923,139 6 August 2001 (06.08.2001) US(71) Applicant (for all designated States except US): MASSACHUSETTS INSTITUTE OF TECHNOLOGY
[US/US]; 77 Massachusetts Avenue, Cambridge, MA 02139 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): ARANA, Leonel,

R. [US/US]; 60 Otis Street, #2, Cambridge, MA 02141 (US). FRANZ, Aleksander, J. [US/US]; 6 Keenan Drive, Winchester, MA 01890-1064 (US). JENSEN, Klavs, F. [US/US]; 103 Outlook Drive, Lexington, MA 02421 (US). SCHAEVITZ, Samuel, B. [US/US]; 193 Bayview Drive, San Rafael, CA 94901-2559 (US). SCHMIDT, Martin, A. [US/US]; 78 Ashley Place, Reading, MA 01867-1262 (US).

(74) Agents: LESLIE, Mark, R. et al.; Kirkpatrick & Lockhart, LLP, Henry W. Oliver Building, 535 Smithfield Street, Pittsburgh, PA 15222-2312 (US).


(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.

[Continued on next page]

(54) Title: THERMALLY EFFICIENT MICROMACHINED DEVICE



ACTION

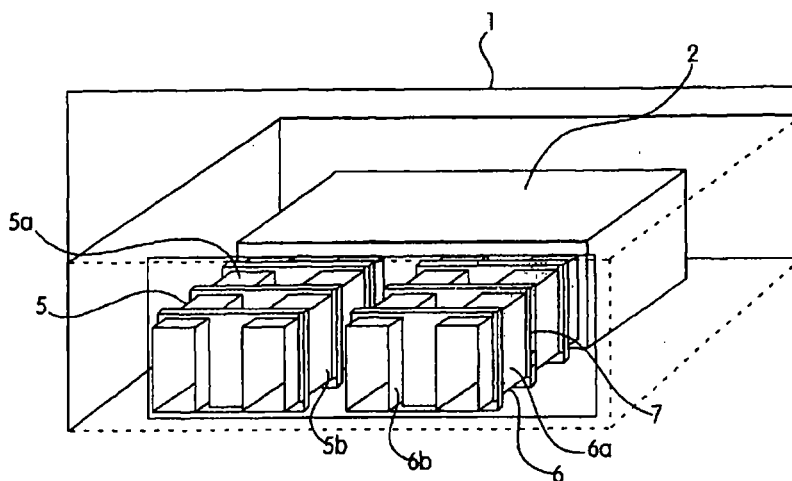

(57) Abstract: A micromachined device (1) for efficient thermal processing at least one fluid conducting tube (5) having at least a region with wall thickness of less than 50µm. The device optionally includes one or more thermally conductive structures in thermal communication with first and second thermally insulating portions of the fluid conducting tube (5). The device also may include a thermally conductive region, and at least a portion of the fluid conducting tube (5) is disposed within the region. A plurality of structures may be provided projecting from a wall of the fluid conducting tube into an inner volume of the tube (5). The structures enhance thermal conduction between a fluid within the tube and a wall of the tube (5). A method for fabricating, from a substrate (3), a micromachined device for processing a fluid stream allows the selective removal of portions of the substrate (3) to provide desired structures integrated within the device. As an example, the micromachined device may be adapted to efficiently react fluid reactants to produce fuel for a fuel cell associated with the device, resulting in a system capable of conversion of chemical to electrical.

WO 03/013729 A3

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

(88) Date of publication of the international search report:
14 August 2003

(48) Date of publication of this corrected version:

18 September 2003

(15) Information about Correction:

see PCT Gazette No. 38/2003 of 18 September 2003, Section II

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.