

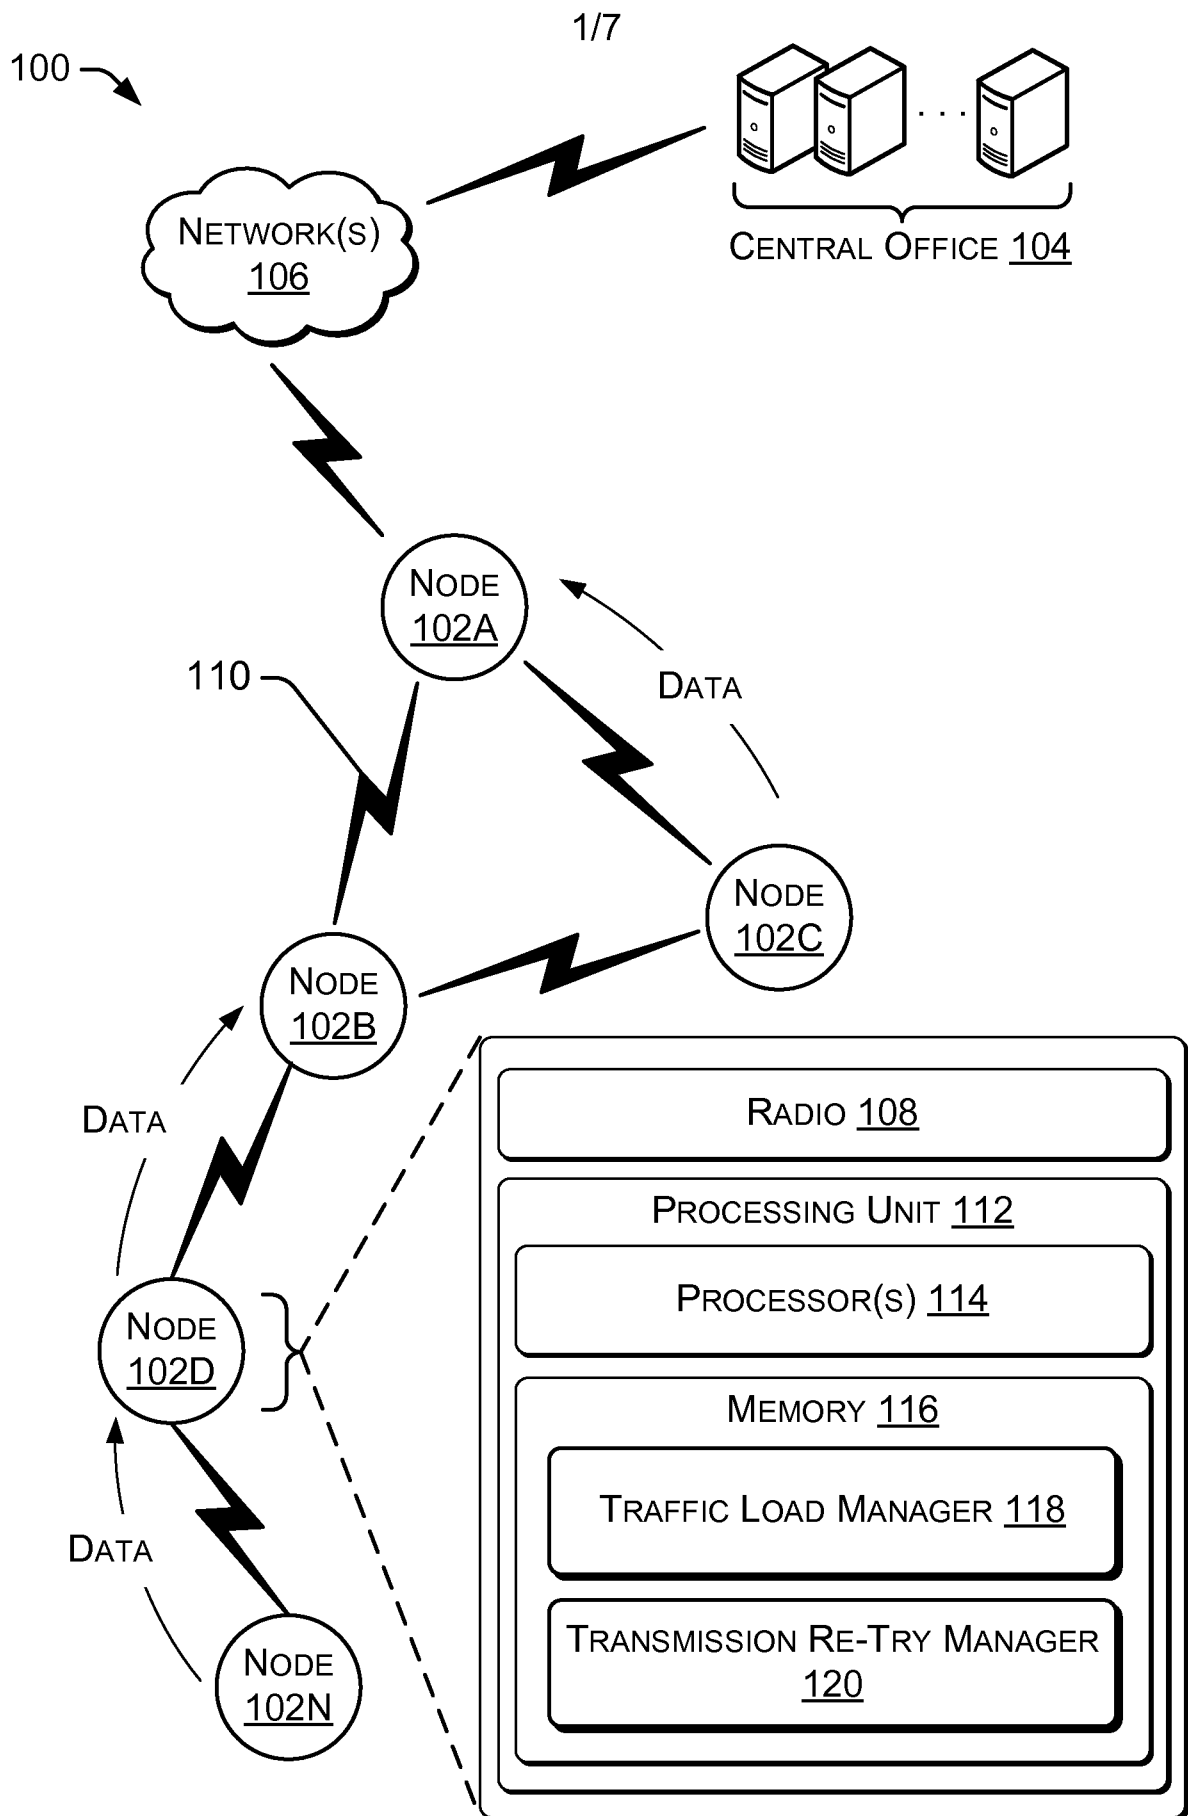
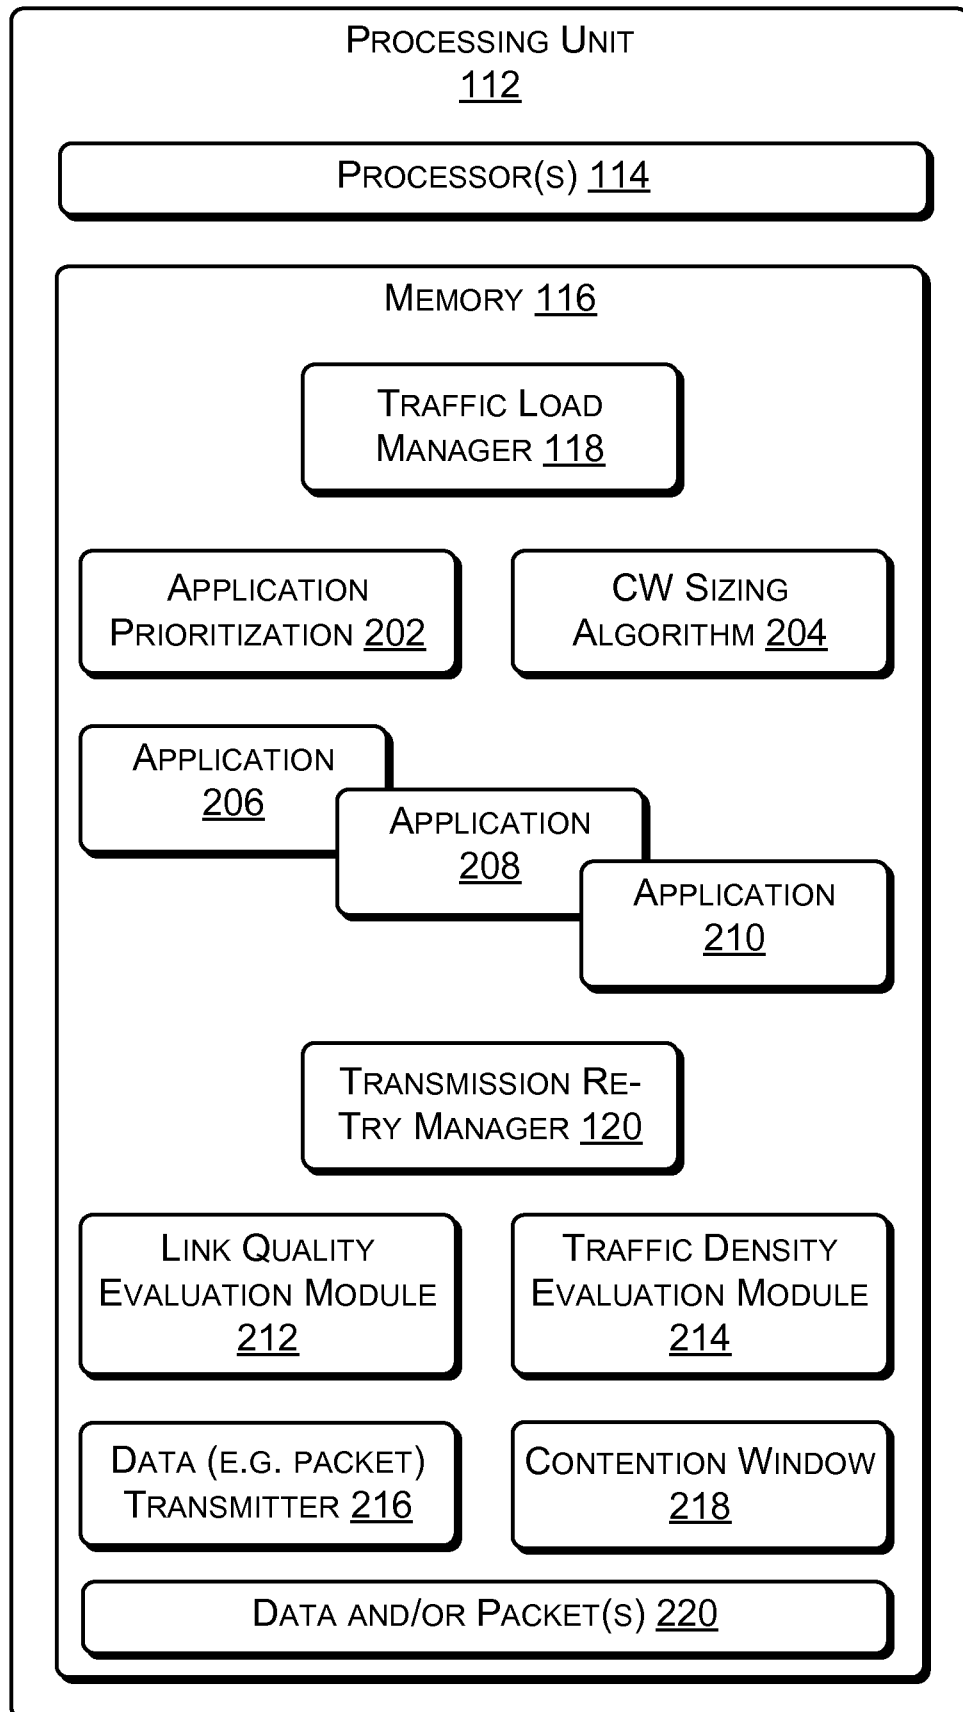


FIG. 1

2/7

**FIG. 2**

3/7

APPLICATION <u>208</u>	ORIGINAL CW <u>302</u>	RESIZED CW <u>308</u>
APPLICATION <u>210</u>	ORIGINAL CW <u>304</u>	RESIZED CW <u>310</u>
APPLICATION <u>212</u>	ORIGINAL CW <u>306</u>	RESIZED CW <u>312</u>

FIG. 3

LINK QUALITY	TRAFFIC DENSITY	CW SIZING DECISION
GOOD	LOW	CW UNCHANGED
GOOD	HIGH	CW DOUBLED
BAD	LOW	CW UNCHANGED
BAD	HIGH	CW DOUBLED, S(L)RCMAX REDUCED

FIG. 4

4/7

500 →

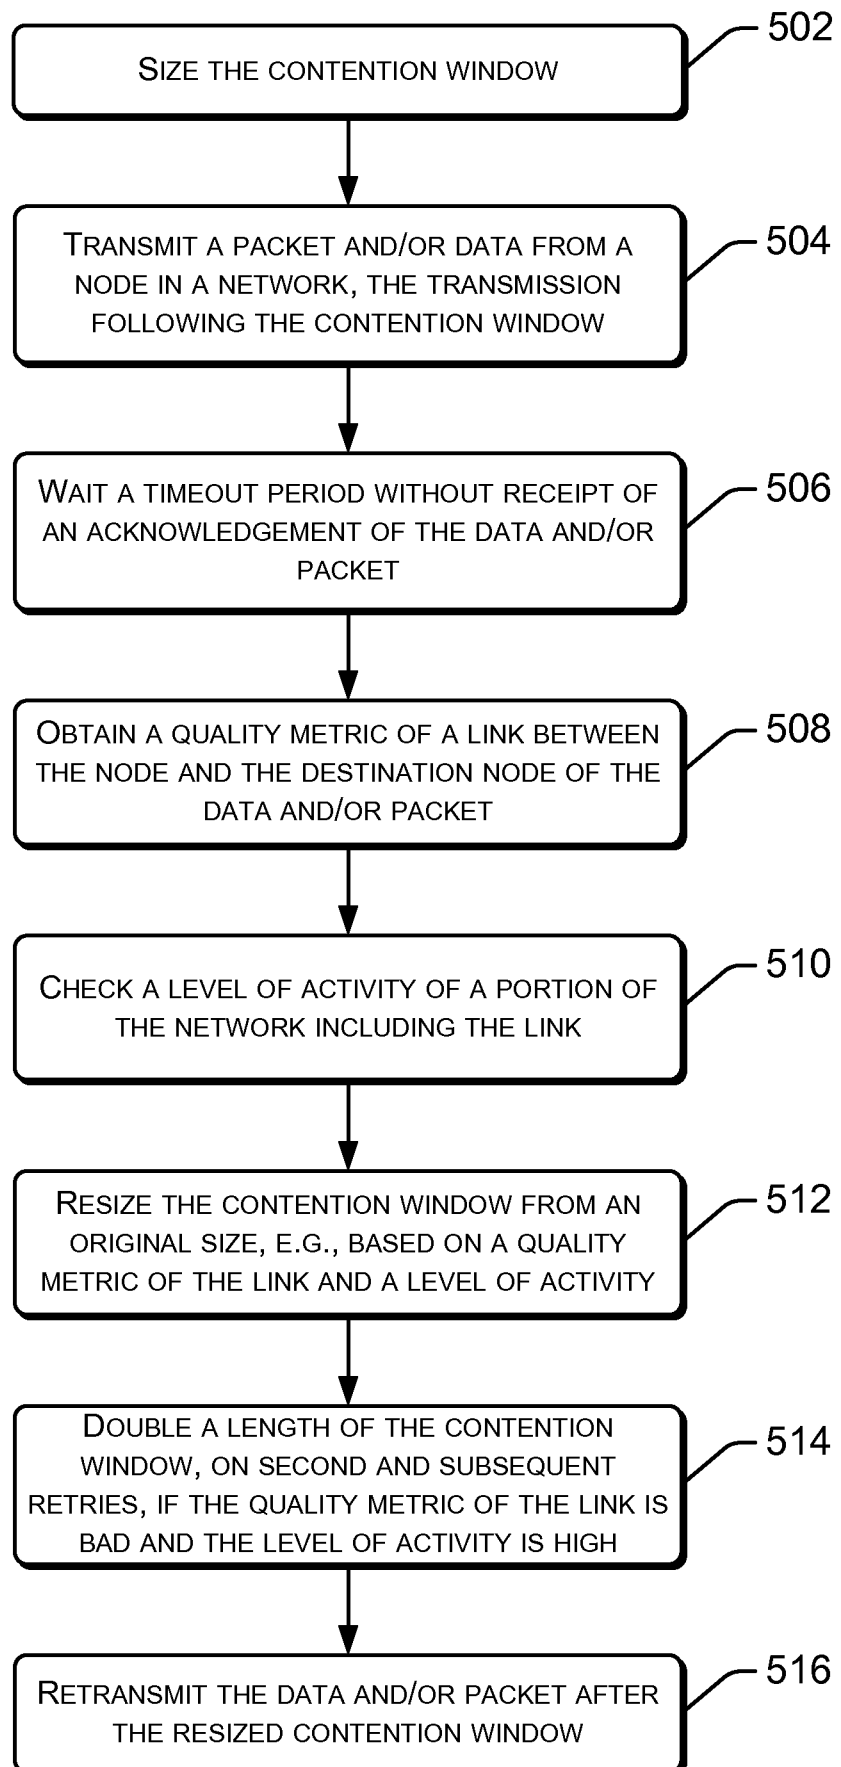


FIG. 5

5/7

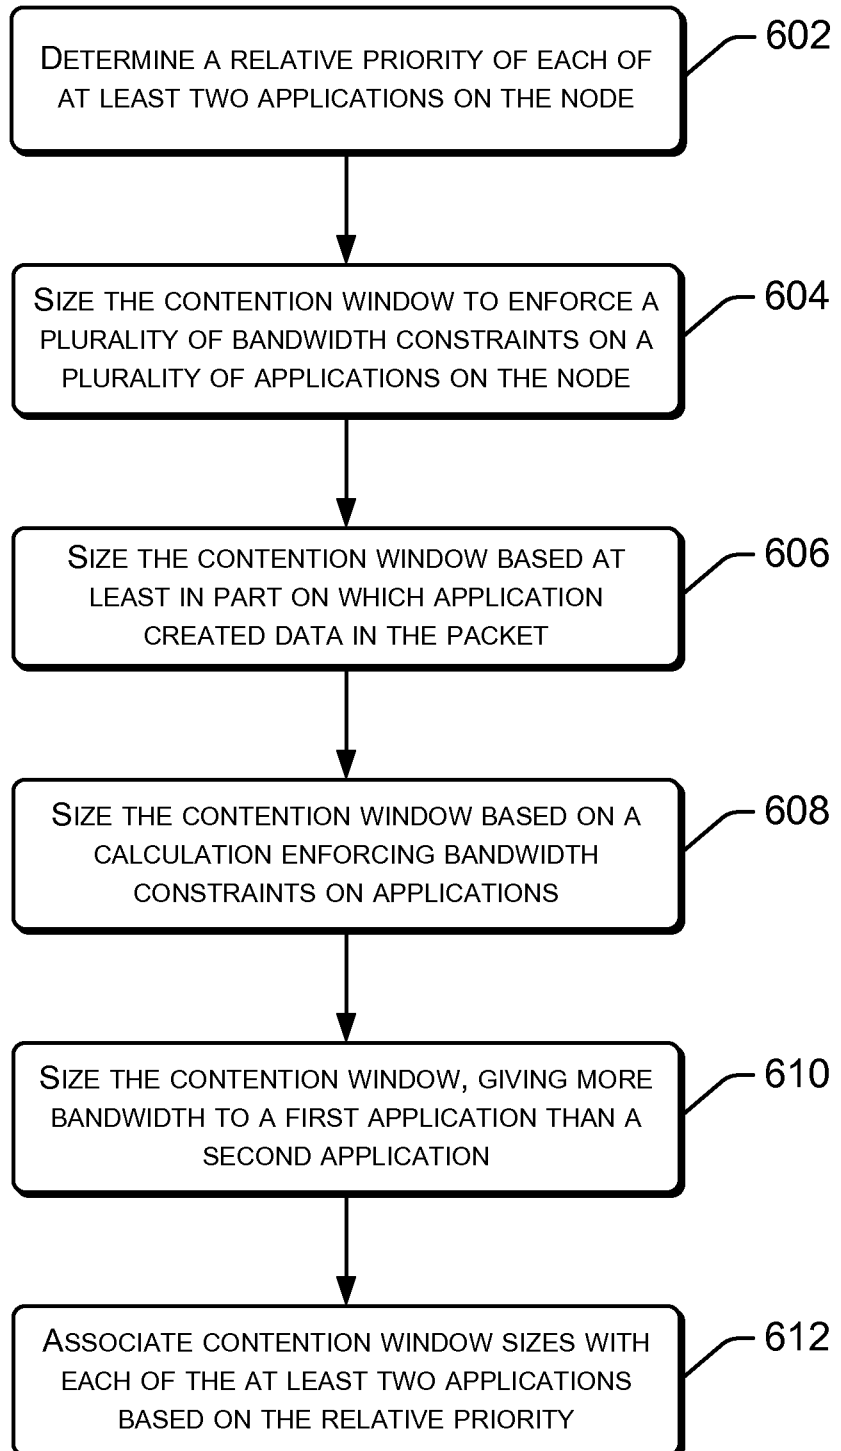
600 

FIG. 6

6/7

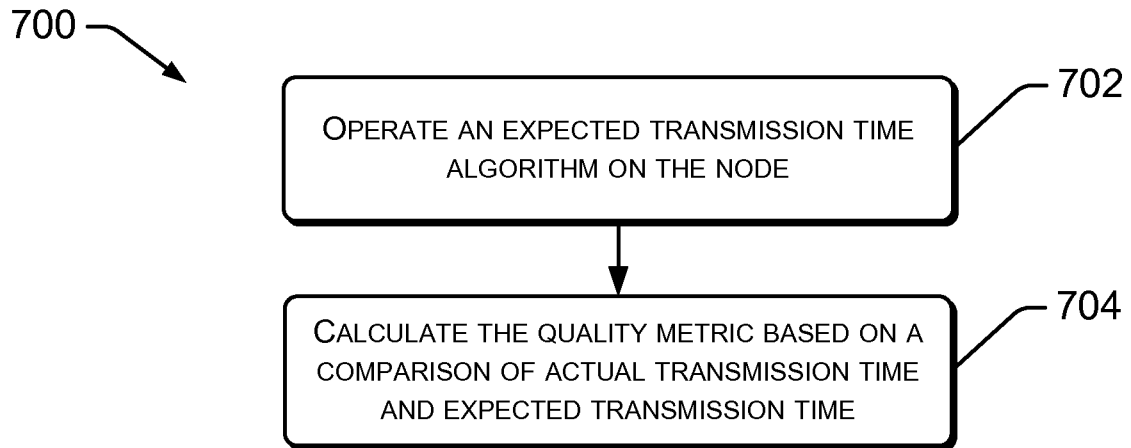


FIG. 7

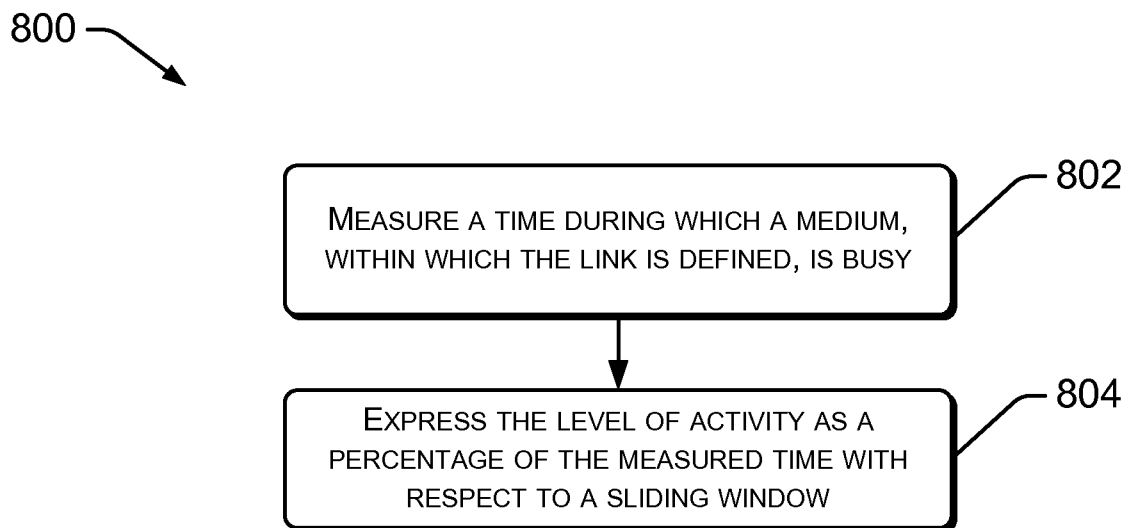


FIG. 8

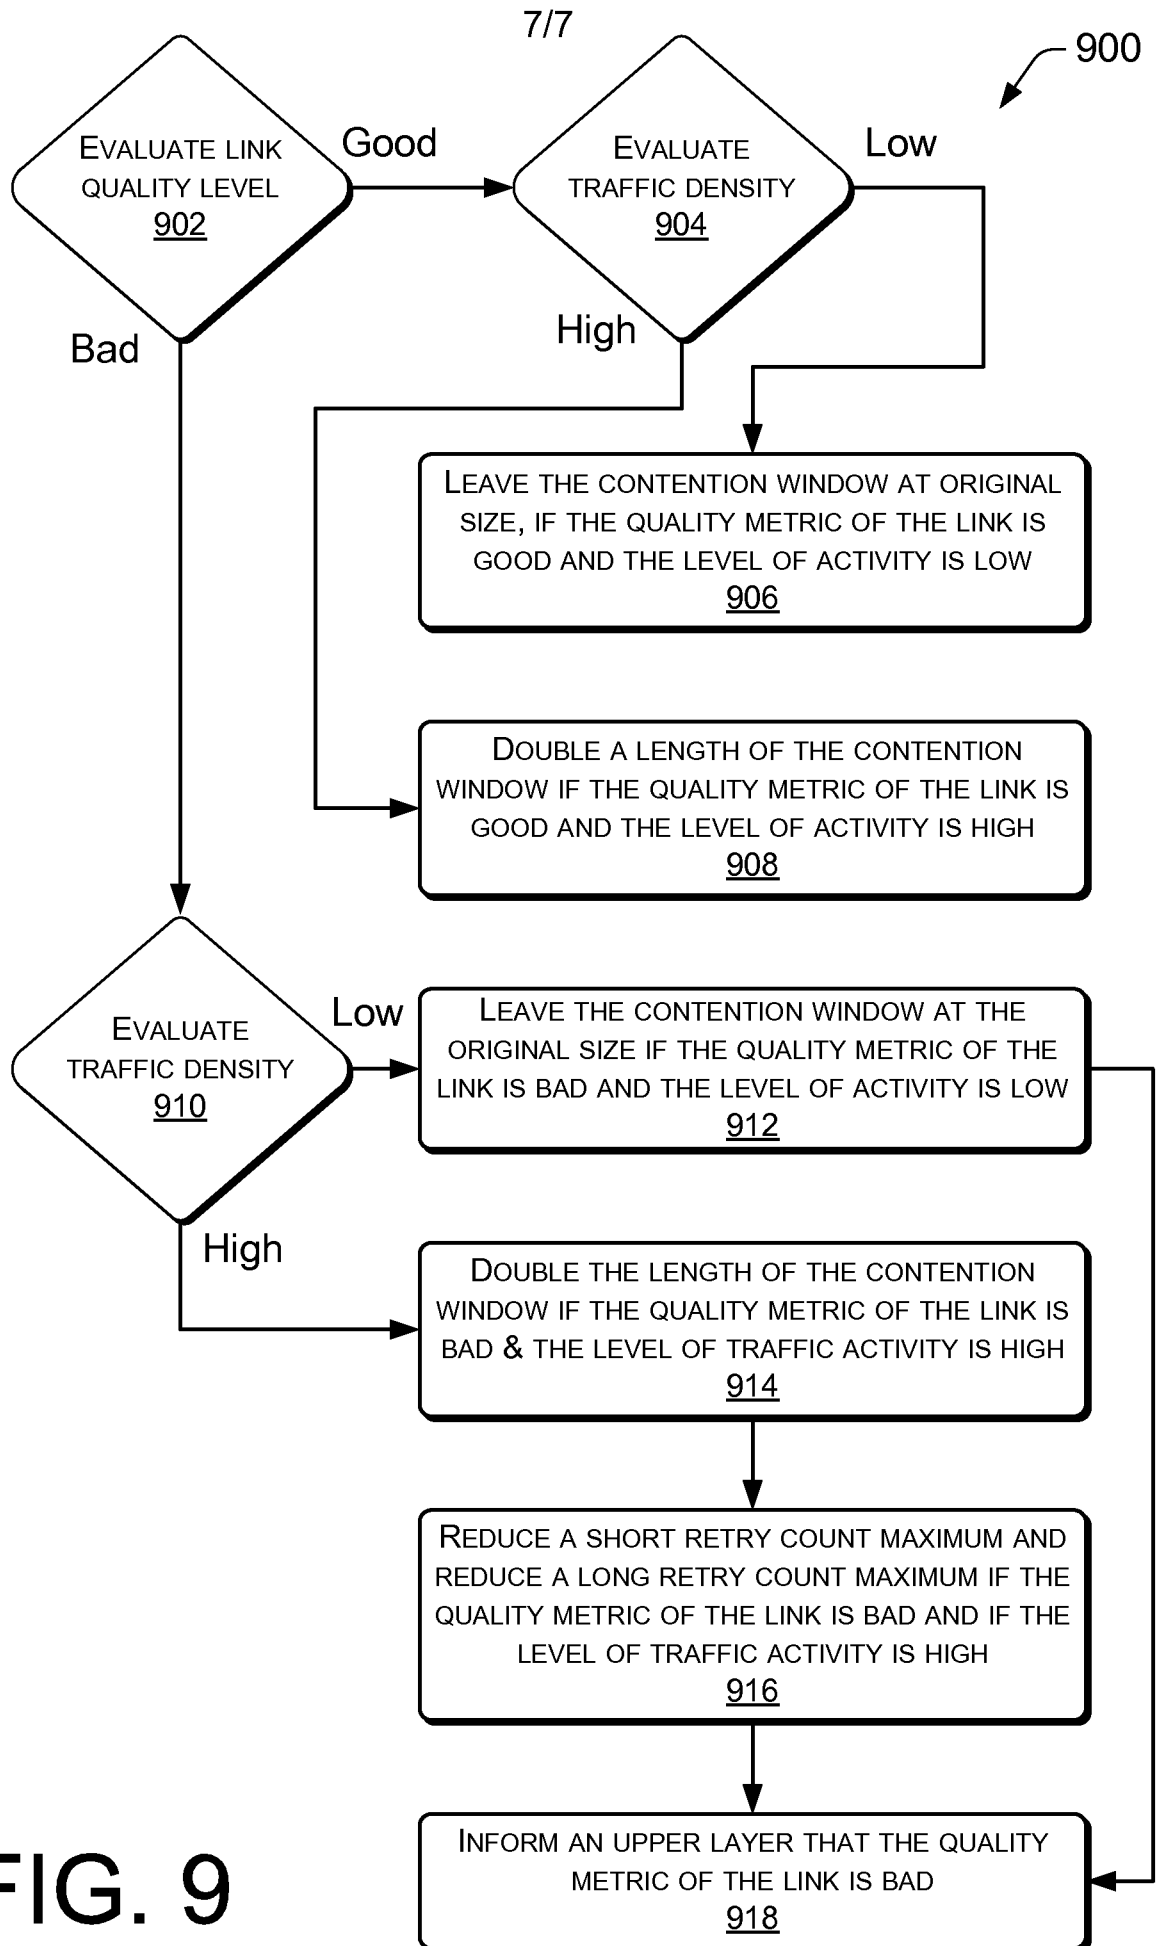


FIG. 9