



- (51) International Patent Classification:
G06F 11/32 (2006.01)
- (21) International Application Number:
PCT/JP2012/067631
- (22) International Filing Date:
4 July 2012 (04.07.2012)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
2011-157183 15 July 2011 (15.07.2011) JP
2012-111680 15 May 2012 (15.05.2012) JP
- (71) Applicant (for all designated States except US): **RICOH COMPANY, LTD.** [JP/JP]; 3-6, Nakamagome 1-chome, Ohta-ku, Tokyo, 1438555 (JP).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **OHWADA, Toshikazu** [JP/JP]; c/o RICOH COMPANY, LTD., 3-6, Nakamagome 1-chome, Ohta-ku, Tokyo, 1438555 (JP).
- (74) Agents: **ITOH, Tadashige** et al.; 16th Floor, Marunouchi MY PLAZA (Meiji Yasuda Seimei Building), 1-1, Marunouchi 2-chome, Chiyoda-ku, Tokyo, 1000005 (JP).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: EMBEDDED APPARATUS, PROGRAM GENERATION APPARATUS, AND PROGRAM

FIG.2

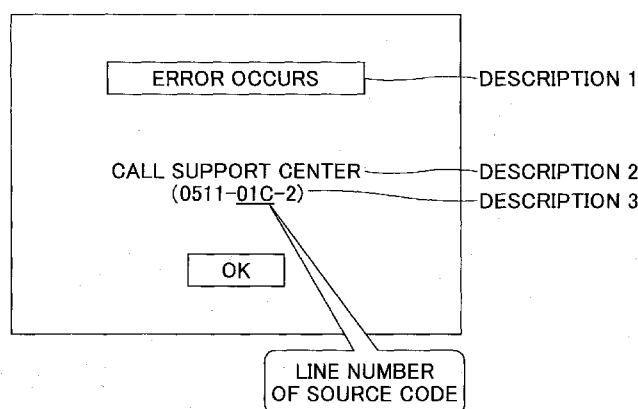

(57) Abstract: An embedded apparatus displaying an error message upon detection of a failure during execution of a program includes a central processing unit executing the program; a program storage unit storing an executable compressed file where plural files are combined as the program; a failure detection unit detecting a failure based on storage contents of addresses storing execution results of instructions; and an error message display unit outputting the error message on a display device when the failure detection unit detects the failure, the error message including version information of the program, file identification information of the file, and line numbers of the instruction being executed in the file, the error message being described in the instruction.