




- (51) **International Patent Classification:**
H04N 19/577 (2014.01)
- (21) **International Application Number:**
PCT/US2020/051972
- (22) **International Filing Date:**
22 September 2020 (22.09.2020)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
62/904,338 23 September 2019 (23.09.2019) US
17/024,288 17 September 2020 (17.09.2020) US
- (71) **Applicant: TENCENT AMERICA LLC** [US/US]; 2747 Park Boulevard, Palo Alto, California 94306 (US).
- (72) **Inventors: CHOI, Byeongdoo;** c/o Tencent America LLC, 2747 Park Boulevard, Palo Alto, California 94306 (US). **WENGER, Stephan;** c/o Tencent America LLC, 2747 Park Boulevard, Palo Alto, California 94306 (US). **LIU, Shan;** c/o Tencent America LLC, 2747 Park Boulevard, Palo Alto, California 94306 (US).
- (74) **Agent: RABENA, John F.** et al.; Sughrue Mion, PLLC, 2000 Pennsylvania Ave., N.W., Suite 900, Washington, District of Columbia 20006 (US).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.
- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,

(54) **Title:** METHOD FOR SIGNALING OUTPUT LAYER SET WITH SUB PICTURE

Fig. 10

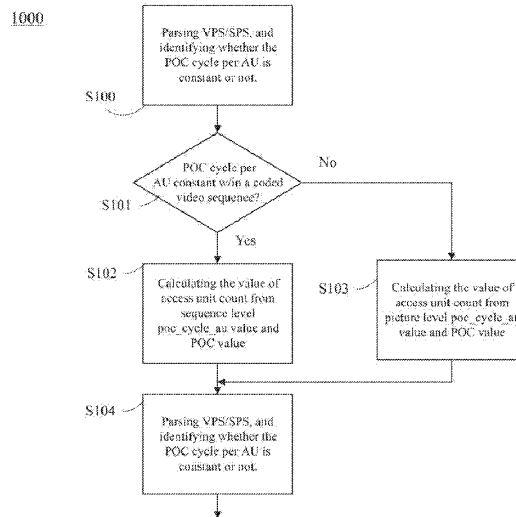

(57) **Abstract:** There is included a method and apparatus comprising computer code configured to cause a processor or processors to perform obtaining video data, parsing a video parameter set (VPS) syntax of the video data, determining whether a value of a syntax element of the VPS syntax indicates a picture order count (POC) value of an access unit (AU) of the video data, and setting at least one of a plurality of pictures, slices, and tiles of the video data to the AU based on the value of the syntax element.

[Continued on next page]

TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*