



- (51) International Patent Classification:
E21B 17/043 (2006.01) *E21B 17/01* (2006.01)
E21B 19/16 (2006.01)
- (21) International Application Number:
PCT/US2012/024809
- (22) International Filing Date:
13 February 2012 (13.02.2012)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
13/031,502 21 February 2011 (21.02.2011) US
- (71) Applicant (for all designated States except US): CAMERON INTERNATIONAL CORPORATION [US/US];
1333 West South Loop, Suite 1700, Houston, Texas 77027 (US).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): BRAITHWAITE, Julian [GB/GB]; 15 Aaran Way, Rothwell, Leeds LS26 0WB (GB).
- (74) Agent: ROSE, Collin A.; 1200 Smith Street, 14th Floor, Houston, Texas 77002 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU,

[Continued on next page]

(54) Title: SYSTEM AND METHOD FOR HIGH-PRESSURE HIGH-TEMPERATURE TIEBACK

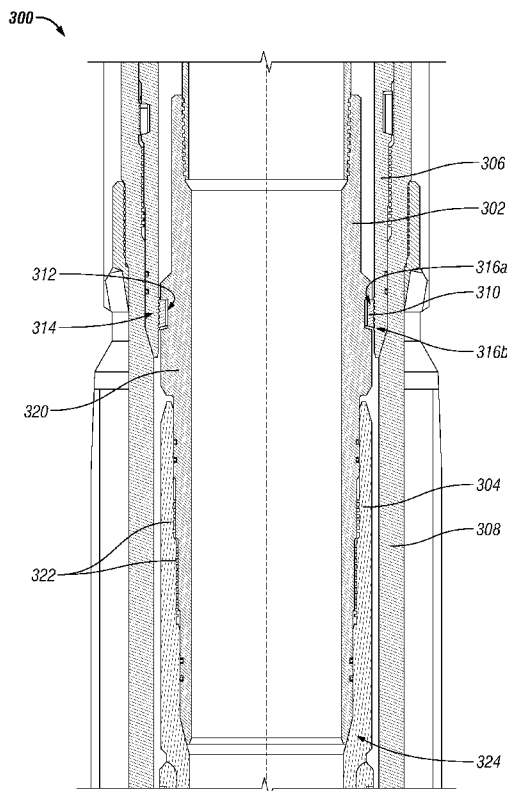


FIG. 3A

(57) Abstract: A high-pressure, high-temperature tieback system including a production casing tieback tool consisting of a ratchet-latch sleeve disposed in a recessed portion of an annular extension of increased wall thickness of the production casing tieback tool and a production casing mudline hanger disposed about the production casing tieback tool. The production casing tieback tool is configured to directly engage the production casing mudline hanger. The ratchet-latch sleeve is configured to directly engage a threaded axial segment of a tubular other than the production casing mudline hanger.



TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*