




- (51) International Patent Classification:
B66B 7/08 (2006.01) *B66B 19/00* (2006.01)
- (21) International Application Number:
PCT/EP2011/072085
- (22) International Filing Date:
7 December 2011 (07.12.2011)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
12/977,915 23 December 2010 (23.12.2010) US
- (71) Applicant (for all designated States except US): **INVENTIO AG** [CH/CH]; Seestrasse 55, CH-6052 Hergiswil (CH).
- (72) Inventors; and
(75) Inventors/Applicants (for US only): **CERCONE, Alex** [US/US]; 47 Ryle Park Ave., Woodland Park, New Jersey 07424 (US). **GIRGIS, Danny** [US/US]; 8 Rolling Meadows Court, Old Bridge, New Jersey 08857 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU,

[Continued on next page]

(54) Title: SUSPENSION AND TRACTION MEDIA INTERFACE FOR ELEVATORS

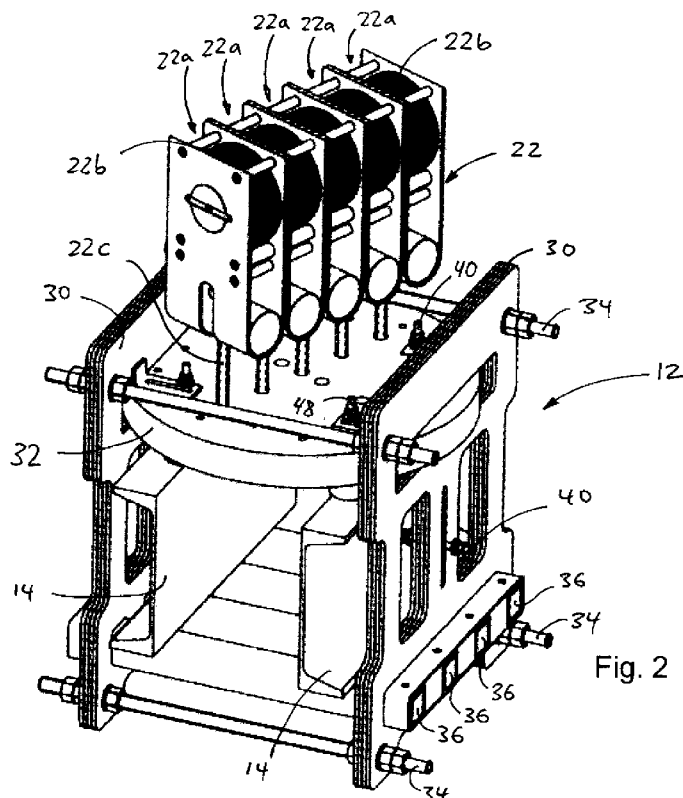

(57) Abstract: A system for coupling a suspension medium (4) to a load carrying structure (14) of an elevator installation includes a frame and a hitch plate (32). The frame has two spaced apart side walls (30), wherein the side walls are positionable to receive a part of the load carrying structure between the side walls. Each side wall has a receptacle (38) having a longitudinal shape. The hitch plate has at least one fixture configured to couple to a sheave arrangement (22) for the suspension medium. Each receptacle is sized to movably receive a section of the hitch plate so that the hitch plate extends between the side walls and is rotatable about a vertical axis.



TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

Published:

— *with international search report (Art. 21(3))*