

New carbodiimides having terminal urea and/or urethane groups, methods for producing said carbodiimides, and use of said carbodiimides

The invention relates to novel carbodiimides having terminal urea and/or urethane groups, methods for the preparation thereof and use thereof as stabilizers in ester-based polyols, in polyethylene terephthalate (PET), in polybutylene terephthalate (PBT), in polytrimethylene terephthalate (PTT), in copolyesters, in thermoplastic polyester elastomers (TPE E), in ethylene vinyl acetate (EVA), in polylactic acid (PLA) and/or in PLA derivatives, in polybutylene adipate terephthalates (PBAT), in polybutylene succinates (PBS), in polyhydroxyalkanoates (PHA), in blends, in triglycerides, in thermoplastic polyurethanes, in polyurethane elastomers, in PU adhesives, in PU casting resins, for PU coatings or in PU foams.

Carbodiimides have been found to be useful in many applications, for example as hydrolysis stabilizers for thermoplastics, polyols, polyurethanes, triglycerides and lubricating oils etc.


Preference is given to using sterically hindered aromatic monocarbodiimides for this purpose. 2,6-Diisopropylphenylcarbodiimide is especially known in this context. These monocarbodiimides, however, have the disadvantage of being volatile even at low temperatures. They are thermally unstable and may eliminate toxic, volatile substances. Other carbodiimides, as described in EP 0 628 541 A1, are based on specific raw materials which are very expensive to purchase. These also have high viscosities at room temperature making these carbodiimides difficult to handle. Furthermore, in certain PU, PET, PLA or lubricant applications, their reactivity and/or their stabilizing effect is insufficient at the standard concentrations used. Polymeric carbodiimides based on cheap raw materials, such as those described in DE-A 2248751 and US-A 2941983, are not sufficiently sterically hindered and do not show a good hydrolysis-stabilizing effect in the majority of ester-based polymers. Highly sterically hindered carbodiimides, such as those based on triisopropylphenyl isocyanate, are very effective but have very high melting points, are insoluble and cannot be introduced into the starting materials of the polyurethane or only with considerable expenditure in terms of equipment and time.

Therefore, there exists a need for novel carbodiimides not having the disadvantages of the prior art, which possess high thermal stability and may be used for protection against hydrolysis of ester-based polymers.

This object was achieved, surprisingly, by the use of particular aromatic carbodiimides.

The object of the present invention, therefore, are carbodiimides having terminal urea and or urethane groups of the formula (I)

- 2 -

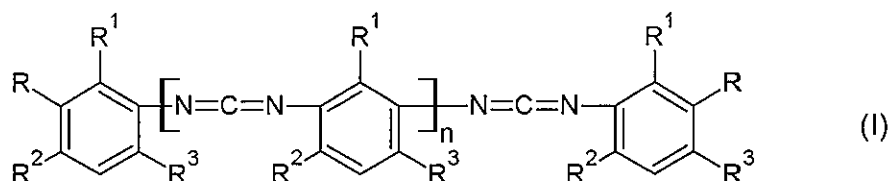

in which

- R may be the same or different and is selected from the group of $\text{-NHCONHR}^{\text{I}}$, $\text{-NHCONR}^{\text{I}}\text{R}^{\text{II}}$ and $\text{-NHCOOR}^{\text{III}}$ residues, where R^{I} and R^{II} are the same or different and are a $\text{C}_1 - \text{C}_{22}$ -alkyl, $\text{C}_6 - \text{C}_{12}$ -cycloalkyl, $\text{C}_6 - \text{C}_{18}$ -aryl or $\text{C}_6 - \text{C}_{18}$ -aralkyl residue and R^{III} is equal to $\text{C}_1 - \text{C}_{22}$ -alkyl, preferably $\text{C}_1 - \text{C}_6$ -alkyl, particularly preferably methyl, ethyl or i-propyl, $\text{C}_6 - \text{C}_{12}$ -cycloalkyl, preferably C_6 -cycloalkyl, $\text{C}_6 - \text{C}_{18}$ -aryl or $\text{C}_6 - \text{C}_{18}$ -aralkyl, and also an unsaturated alkyl residue (e.g. an oleyl residue) having 2-22, preferably 12-20, particularly preferably 16-18 carbon atoms, or an alkoxy polyoxyalkylene residue,
- R^1 , R^2 and R^3 are each independently methyl or ethyl, wherein each benzene ring has only one methyl group and
- $n = 0$ to 20, preferably $n = 1$ to 10.

The carbodiimide content (NCN content, measured by titration with oxalic acid) of the carbodiimides according to the invention is preferably 2 - 14% by weight.

Preference is given to carbodiimides of the formula (I) where $\text{R} = \text{-NHCOOR}^{\text{III}}$, where R^{III} is an alkoxy polyoxyalkylene residue, R^1 , R^2 and R^3 are each independently methyl or ethyl, wherein each benzene ring has only one methyl group and $n = 0$ to 20, preferably $n = 1$ to 10, particularly preferably $n = 1$ to 4, especially preferably $n = 2$ to 3. The carbodiimide content of these preferred carbodiimides is preferably 2 - 10% by weight, particularly preferably 4 - 8% by weight, especially preferably 5 - 7% by weight.

Preferred alkoxy polyoxyalkylene residues are polyethylene glycol monomethyl ethers with molar masses of 200 - 600 g/mol, particularly preferably 350 - 550 g/mol.

Preference is likewise given to carbodiimides of the formula (I) where $\text{R} = \text{-NHCOOR}^{\text{III}}$, where R^{III} is equal to $\text{C}_1 - \text{C}_{22}$ -alkyl, preferably $\text{C}_1 - \text{C}_6$ -alkyl, particularly preferably methyl, ethyl or i-propyl, $\text{C}_6 - \text{C}_{12}$ -cycloalkyl, preferably C_6 -cycloalkyl, and R^1 , R^2 and R^3 are each independently methyl or ethyl, wherein each benzene ring has only one methyl group and $n = 0$ to 20, preferably $n = 1$ to 10, particularly preferably $n = 3$ to 8. The carbodiimide content of these preferred carbodiimides is preferably 4 - 13% by weight, particularly preferably 10 - 13% by weight.

These preferred carbodiimides of the formula (I) where $R = -NHCOOR^{III}$, where R^{III} is equal to $C_1 - C_{22}$ -alkyl, preferably $C_1 - C_6$ -alkyl, particularly preferably methyl, ethyl or i-propyl, $C_6 - C_{12}$ -cycloalkyl, preferably C_6 -cycloalkyl and R^1 , R^2 and R^3 are each independently methyl or ethyl, wherein each benzene ring has only one methyl group and $n = 0$ to 20, preferably $n = 1$ to 10, particularly preferably $n = 3$ to 8, are solid and have softening points $> 40^\circ C$ and are therefore outstandingly suitable for stabilizing ester-based polymers, which are preferably selected from the group of polyethylene terephthalate (PET), polybutylene terephthalate (PBT), polytrimethylene terephthalate (PTT), thermoplastic polyurethanes (TPU), copolyesters such as the modified polyester of cyclohexanediol and terephthalic acid (PCTA), thermoplastic polyester elastomers (TPE E), ethylene vinyl acetate (EVA), polylactic acid (PLA) and/or PLA derivatives, polyhydroxyalkanoates (PHA), polybutylene adipate terephthalate (PBAT), polybutylene succinate (PBS), or are suitable in blends such as PA/PET or PHA/PLA blends which the present invention also relates to.

In the method according to the invention for stabilizing the ester-based polymers, the carbodiimides of the formula (I) where $R = -NHCOOR^{III}$, where R^{III} is equal to $C_1 - C_{22}$ -alkyl, preferably $C_1 - C_6$ -alkyl, particularly preferably methyl, ethyl or i-propyl, $C_6 - C_{12}$ -cycloalkyl, preferably C_6 -cycloalkyl and R^1 , R^2 and R^3 are each independently methyl or ethyl, wherein each benzene ring has only one methyl group and $n = 0$ to 20, preferably $n = 1$ to 10, particularly preferably $n = 3$ to 8, are added by means of solids metering units to the ester-based polymers selected from the group comprising polyethylene terephthalate (PET), polybutylene terephthalate (PBT), polytrimethylene terephthalate (PTT), thermoplastic polyurethanes (TPU), copolyesters such as the modified polyester of cyclohexanediol and terephthalic acid (PCTA), thermoplastic polyester elastomers (TPE E), ethylene vinyl acetate (EVA), polybutylene adipate terephthalate (PBAT), polybutylene succinate (PBS), polylactic acid (PLA) and/or PLA derivatives, polyhydroxyalkanoates (PHA), or in blends such as PA/PET or PHA/PLA blends.

Solids metering units in the context of the invention are preferably: single, double or multi-shaft extruders, continuously operating co-kneaders (Buss type) and kneaders operating in batch mode, e.g. Banbury type and other conventional units in the polymer industry.

The concentration of the carbodiimides of the formula (I) according to the invention in the ester-based polymers is preferably 0.1 - 5% by weight, preferably 0.5 - 3% by weight, particularly preferably 1 - 2% by weight.

In a further embodiment of the invention, carbodiimides of the formula (I) are preferably those in which R is equal to $-NHCOOR^{III}$, where R^{III} is a saturated and/or unsaturated alkyl residue having 2 - 22, preferably 12 - 20, particularly preferably 16 - 18 carbon atoms, and R^1 , R^2 and R^3 are each independently methyl or ethyl, wherein each benzene ring

- 4 -


has only one methyl group and $n = 0$ to 20, preferably $n = 1$ to 10, particularly preferably $n = 1$ to 4, especially preferably $n = 2$ to 3. The carbodiimide content of these preferred carbodiimides is preferably 2 - 10% by weight, particularly preferably 4 - 8% by weight, especially preferably 5 - 7% by weight.

- 5 The carbodiimides according to the invention also preferably have average molar masses (M_w) of 1000 - 5000 g/mol, preferably 1500 - 4000 g/mol, particularly preferably 2000 - 3000 g/mol.


Furthermore, preference is given to carbodiimides having a polydispersity $D = M_w/M_n$ of 1.2 - 2, particularly preferably 1.4 - 1.8.

- 10 The scope of the invention includes all general residue definitions, indices, parameters and illustrations mentioned above and below, and those mentioned in preferred ranges with one another, i.e. also any combinations between the respective ranges and preferred ranges.

- 15 The present invention also relates to the preparation of the carbodiimides according to the invention by carbodiimidization of aromatic diisocyanates of the formula (II)

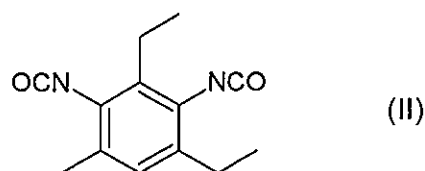

and/or of the formula (III)

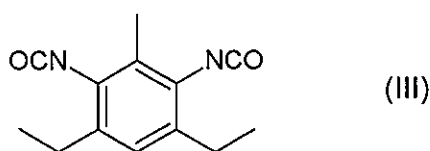

- 20 with elimination of carbon dioxide at temperatures of 80°C to 200°C in the presence of catalysts and optionally solvent and the subsequent terminal functionalization of the free NCO groups with primary or secondary amines or alcohols and/or alkoxypolyoxyalkylene alcohols.

Preference is given to using mixtures of diisocyanates of the formulae (II) and (III), preferably in the ratio of 60 : 40 to 95 : 5, particularly preferably 70 : 30 to 90 : 10.

- 25 The aromatic diamines required to prepare the diisocyanates may be prepared - as known to those skilled in the art- via Friedel-Crafts alkylation of the corresponding

toluenediamines with the appropriate alkene, or haloalkane. The aromatic diamines are commercial compounds which are available, for example, from Lonza AG under the trade name Lonzacure®.

5 Subsequently, these diamines are reacted with phosgene to give the corresponding diisocyanate.

To prepare the carbodiimides according to the invention, the diisocyanates of the formula (II) and/or (III) may be condensed, with elimination of carbon dioxide, at elevated temperatures, preferably at temperatures of 80 - 200°C, particularly preferably 100 to 180°C, especially preferably 120 - 140°C, appropriately in the presence of catalysts.
10 Suitable methods for this purpose are described, for example, in DE-A 1130594 and DE-A 11564021.

In one embodiment of the invention, preferred catalysts for the preparation of the compounds of the formula (I) are phosphorus compounds. Phosphorus compounds used are preferably phospholene oxides, phospholidines or phospholine oxides, and the
15 corresponding phospholene sulphides. It is also possible to use, as catalysts, tertiary amines, basic metal compounds, alkali metal or alkaline earth metal oxides, hydroxides, alkoxides or phenoxides, metal carboxylates and non-basic organometallic compounds.

The carbodiimidization can be performed either in substance or in a solvent. Solvents used are preferably alkylbenzenes, paraffin oils, polyethylene glycol dimethyl ether,
20 ketones or lactones.

When the reaction mixture has the desired content of NCO groups, corresponding to an average degree of condensation of $n = 0$ to 20, preferably $n = 1$ to 10, the polycarbodiimidization is usually stopped.

In one embodiment of the present invention, the temperature of the reaction mixture is reduced for this purpose to 50 - 120°C, preferably 60 - 100°C, particularly preferably to 80 - 90°C and the catalysts are distilled off under reduced pressure. In a preferred method variant of the carbodiimides according to the invention, the excess diisocyanate is subsequently distilled off at temperatures of 150 - 200°C, preferably 160 - 180°C. The free terminal isocyanate groups of the carbodiimides are then reacted with aliphatic
25 and/or aromatic amines, alcohols and/or alkoxypolyoxyalkylene alcohols, preferably in a slight excess of -NH, -NH₂ and/or -OH groups, optionally in the presence of a PU catalyst known to a person skilled in the art, preferably tert. amines or organotin compounds, particularly preferably DBTL (dibutyltin dilaurate or DOTL (dioctyltin dilaurate). The quantitative ratio of amines, alcohols and/or alkoxypolyoxyalkylene alcohols to
30

carbodiimides is preferably 1.005 - 1.05 : 1, particularly preferably 1.01 - 1.03 : 1, based on the N=C=O groups present.


Preferred alcohols are ethanol and cyclohexanol.

In a further embodiment of the present invention, the temperature of the reaction mixture is reduced to 50 - 120°C, preferably 60 - 100°C, particularly preferably to 80 - 90°C to interrupt the carbodiimidization and, optionally after addition of a solvent, preferably selected from the group of alkylbenzenes, particularly preferably toluene, the free terminal isocyanate groups of the carbodiimides are reacted with aliphatic and/or aromatic amines, alcohols and/or alkoxy polyoxyalkylene alcohols, preferably in a slight excess of -NH, -NH₂ and/or -OH groups, optionally in the presence of a PU catalyst known to a person skilled in the art, preferably tert. amines or organotin compounds, particularly preferably DBTL (dibutyltin dilaurate or DOTL (dioctyltin dilaurate). The quantitative ratio of amines, alcohols and/or alkoxy polyoxyalkylene alcohols to carbodiimides is preferably 1.005 - 1.05 : 1, particularly preferably 1.01 - 1.03 : 1, based on the N=C=O groups present.


After the reaction is complete, the catalyst and optionally the solvent is distilled off under reduced pressure, preferably at temperatures of 80 – 200°C.

Preferred alcohols are ethanol and cyclohexanol.

The present invention also relates to a further method for preparing the carbodiimides according to the invention by a partial, preferably <50% terminal functionalization of the free NCO groups in the aromatic diisocyanates of the formula (II)

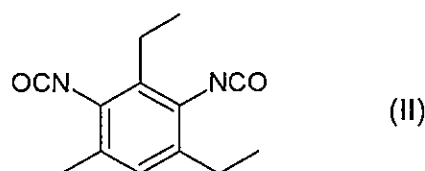

and/or of the formula (III)



with primary or secondary amines or alcohols and/or alkoxy polyoxyalkylene alcohols and subsequent carbodiimidization with elimination of carbon dioxide at temperatures of 80°C to 200°C in the presence of catalysts and optionally solvent.

The carbodiimides according to the invention are preferably purified after preparation thereof. The crude products can be purified by distillation and/or by means of solvent extraction. Suitable solvents used for the purification may be, with preference, polyethylene glycol dimethyl ether, alkylbenzenes, paraffin oils, alcohols, ketones, or esters. These take the form of commercial solvents.

The present invention also relates to a composition comprising

- at least one ester-based polymer,
- and
- at least one carbodiimide of the formula (I) according to the invention.

The ester-based polymers preferably take the form of polyester polyols, ester-based thermoplastic polyurethanes, ester-based polyurethane elastomers or foams, polyethylene terephthalate (PET), polybutylene terephthalate (PBT), polytrimethylene terephthalate (PTT), copolyesters such as the modified polyester of cyclohexanediol and terephthalic acid (PCTA), thermoplastic polyester elastomers (TPE E), ethylene vinyl acetate (EVA), polylactic acid (PLA) and/or PLA derivatives, polyhydroxyalkanoates (PHA), polybutylene adipate terephthalate (PBAT), polybutylene succinate (PBS) or in blends such as preferably PA/PET or PHA/PLA blends. These take the form of commercially available polymers.

In a particularly preferred embodiment of the invention, the ester group-containing polymers are polylactic acid (PLA).

Here, the concentration of the carbodiimide of the formula (I) according to the invention in the composition according to the invention is preferably 0.1 - 5% by weight, preferably 0.5 - 3% by weight, particularly preferably 1 - 2% by weight.

The polyester polyols as ester-based polymers are preferably long-chain compounds that preferably have a molecular weight (in g/mol) of up to 2000, preferably between 500 - 2000 and more preferably between 500 - 1000.

The term polyester polyols in the context of the invention encompasses both long-chain diols and triols, and also compounds having more than three hydroxyl groups per molecule.

It is advantageous when the polyester polyol has an OH number of up to 200, preferably between 20 and 150 and more preferably between 50 and 115. Especially suitable are

polyester polyols which are reaction products of various polyols with aromatic or aliphatic dicarboxylic acids and/or polymers of lactones.

The polyester polyols used in the context of the invention are commercially available compounds obtainable from Bayer MaterialScience AG under the Baycoll® or
5 Desmophen® trade name.

The present invention further relates to a preferred method for preparing the carbodiimides of the formula (I) according to the invention where $R = -NHCOOR^{III}$, where R^{III} is equal to $C_1 - C_{22}$ -alkyl, preferably $C_1 - C_6$ -alkyl, particularly preferably methyl, ethyl or i-propyl, $C_6 - C_{12}$ -cycloalkyl, particularly preferably C_6 -cycloalkyl, and R^1 , R^2 and R^3 are
10 each independently methyl or ethyl, wherein each benzene ring has only one methyl group and $n = 0$ to 20, preferably $n = 1$ to 10, particularly preferably $n = 3$ to 8, in which, after the carbodiimidization and optionally purification, the melt is pelletized, preferably on pelletizing belts. In this case, it is possible to use common pelletizing systems and likewise common granulating systems. These can be obtained, for example, from Sandvik
15 Holding GmbH or GMF Gouda.

Especially suitable are the carbodiimides of the formula (I) according to the invention where $R = -NHCOOR^{III}$, where R^{III} is cyclohexyl.

The present invention also relates to the use of the carbodiimides according to the invention as protection against hydrolytic degradation in ester-based polyols, polyethylene
20 terephthalate (PET), polybutylene terephthalate (PBT), polytrimethylene terephthalate (PTT), copolyesters such as the modified polyester of cyclohexanediol and terephthalic acid (PCTA), thermoplastic polyester elastomers (TPE E), ethylene vinyl acetate (EVA), polylactic acid (PLA) and/or PLA derivatives, polyhydroxyalkanoates (PHA), polybutylene adipate terephthalate (PBAT), polybutylene succinate (PBS), in blends such as PA/PET
25 or PHA/PLA blends, in triglycerides, preferably trimethylolpropane trioleate (TMP oleate), in oil formulations for the lubricants industry, in thermoplastic polyurethanes (TPU), in polyurethane elastomers, in PU adhesives, in PU casting resins, in PU foams or in PU coatings for wood, leather, artificial leather and textiles. Particular preference is given here to the use in polylactic acid (PLA).

30 The examples which follow serve to illustrate the invention but have no limiting effect.

Working examples

Tested were:

- 5 1) CDI (A): a liquid carbodiimide having an NCN content of ca. 7.5% by weight, based on 1,3-bis(1-methyl-1-isocyanatoethyl)benzene, terminally functionalized with polyethylene glycol monomethyl ether PEG 550 MME, prepared analogously to example 2 in EP-A 0 628 541, comparative.
- 10 2) CDI (B): a liquid carbodiimide of the formula (I) having an NCN content of ca. 6% by weight, $n = \text{ca. } 2$, obtained by reacting a mixture based on ca. 80% by weight of 2,4-diethyltoluenediisocyanate, i.e. the diisocyanate of the formula (II), and 20% by weight of 2,6-diethyltoluenediisocyanate, i.e. the diisocyanate of the formula (III), terminally functionalized with polyethylene glycol monomethyl ether (PEG 550 MME from BASF SE), inventive.
- 15 3) CDI (C): a highly viscous carbodiimide having an NCN content of ca. 14% by weight, based on 80% by weight of 2,4-diethyltoluenediisocyanate, i.e. the diisocyanate of the formula (II), and 20% by weight of 2,6-diethyltoluenediisocyanate, i.e. the diisocyanate of the formula (III), where $n > 40$, non-terminally functionalized (comparative).
- 20 4) CDI (D): a solid polymeric carbodiimide having an NCN content of ca. 13.5% by weight based on triisopropylphenyl diisocyanate, terminally functionalized (comparative), obtainable from Rhein Chemie Rheinau GmbH under the trade name Stabaxol ® P.
- 5) CDI (E): a monomeric solid carbodiimide having an NCN content of ca. 10.8% by weight based on 2,6-diisopropylphenyl isocyanate (comparative), obtainable from Rhein Chemie Rheinau GmbH under the trade name Stabaxol ® I.
- 25 6) CDI (F): a solid carbodiimide having an NCN content of ca. 12.5% by weight, based on ca. 80% by weight of 2,4-diethyltoluenediisocyanate, i.e. the diisocyanate of the formula (II), and 20% by weight of 2,6-diethyltoluenediisocyanate, i.e. the diisocyanate of the formula (III), terminally functionalized with ethanol where $n = \text{ca. } 6$, inventive.
- 30 7) CDI (G): a solid carbodiimide having an NCN content of ca. 10.2% by weight, based on ca. 80% by weight of 2,4-diethyltoluenediisocyanate, i.e. the diisocyanate of the formula (II), and 20% by weight of 2,6-diethyltoluenediisocyanate, i.e. the diisocyanate of the formula (III), terminally functionalized with cyclohexanol where $n = \text{ca. } 5$, inventive.

Ester-based polymers:

- 8) Polyester polyol based on adipic acid (Desmophen® 2001 KS from Bayer MaterialScience AG).
- 9) Polyethylene terephthalate (PET) obtainable from Novapet.
- 5 10) Polylactic acid (PLA, injection moulding quality) obtainable from NatureWorks LLC.

Preparation of the inventive carbodiimide CDI (B)

A baked-out and nitrogen-filled 250 ml four-neck flask was charged under a nitrogen stream with 92 g of a mixture consisting of ca. 20% by weight of 2,6-diethyltoluenediisocyanate and ca. 80% by weight of 2,4-diethyltoluenediisocyanate. After
10 addition of 50 mg of 1-methylphospholene oxide the mixture was heated to 130°C. Thereafter, carbodiimidization was continued at 130°C until an NCO content of ca. 12% by weight had been attained. The catalyst was then removed completely by distillation under vacuum at a temperature of ca. 120°C and the excess diisocyanate was distilled off under vacuum at a temperature of ca. 180°C. Finally, the reaction mixture was cooled
15 to ca. 90 - 100°C and the terminal NCO groups were reacted with PEG 500 MME. The resulting product was a light, yellow liquid having an NCN content of ca. 6% by weight and a polydispersity (Mw/Mn) of ca. 1.5.

Preparation of the carbodiimide CDI (C)

A baked-out and nitrogen-filled 250 ml four-neck flask was charged under a nitrogen
20 stream with 150 g of a mixture consisting of ca. 20% by weight of 2,6-diethyltoluenediisocyanate and ca. 80% by weight of 2,4-diethyltoluenediisocyanate. After addition of 50 mg of 1-methylphospholene oxide the mixture was heated to 180°C. Thereafter, carbodiimidization was continued at 180°C until an NCO content of < 1% by weight had been attained. The resulting product was a dark, sticky, solidified melt having
25 an NCN content of ca. 14% by weight.

Preparation of the inventive carbodiimide CDI (F) and CDI (G):

A baked-out and nitrogen-filled 250 ml four-neck flask was charged under a nitrogen stream with 92 g of a mixture consisting of ca. 20% by weight of 2,6-diethyltoluenediisocyanate and ca. 80% by weight of 2,4-diethyltoluenediisocyanate. After
30 addition of 50 mg of 1-methylphospholene oxide the mixture was heated to 130°C. Thereafter, carbodiimidization was continued at 130°C until an NCO content of ca. 7 - 9% by weight had been attained. The catalyst was then removed completely by distillation under vacuum at a temperature of ca. 120°C and the excess diisocyanate was distilled off under vacuum at a temperature of ca. 180°C. Finally, the reaction mixture was cooled

to ca. 70 - 80°C and the terminal NCO groups, after addition of toluene as solvent, were reacted with ethanol (CDI F) or cyclohexanol (CDI G). After removal of the solvent by distillation, solids were obtained having an NCN content of ca. 12.5% by weight (CDI F) or 10.2% by weight (CDI G) and a polydispersity (Mw/Mn) of ca. 1.8.

5 **Thermal stability**

To investigate the thermal stability at 80°C, 1% by weight of the abovementioned carbodiimides was stirred into polyester polyol having an initial acid number of ca. 0.9 mg KOH/g and the mixture was stirred further at this temperature for 3 h. The gas phase was investigated by GC-MS on the cleavage substances (isocyanates). The results are shown in Table 1:

Carbodiimide	Detection of cleavage substances (isocyanates)
CDI (A) (C)	Negative
CDI (B) (inv.)	Negative

C = comparative example, inv. = inventive

It is evident from Table 1 that the inventive carbodiimide CDI (B) has excellent thermal stability which is comparable to CDI (A).

Acid number decrease in polyester polyol

15 As is known, the effect of a hydrolysis stabilizer based on sterically hindered carbodiimides in liquid polyester polyols can be tested by means of the decrease in acid number.

The decrease in acid number in the composition according to the invention was tested using the inventive CDI (B) compared to the CDI (A) known from the prior art a polyester polyol based on adipic acid (Desmophen® 2001 KS from Bayer MaterialScience AG).

20 For this purpose, at 80°C, 1% by weight of the abovementioned carbodiimides was stirred into polyester polyol having an initial acid number of ca. 0.9 mg KOH/g and the acid number was measured at regular intervals.

The results are shown in Table 2:

Carbodiimide in Desmophen ® 2001 KS	Acid number [mg KOH/g] after 0 min	Acid number [mg KOH/g] after 30 min	Acid number [mg KOH/g] after 60 min	Acid number [mg KOH/g] after 120 min	Acid number [mg KOH/g] after 240 min	Acid number [mg KOH/g] after 480 min
CDI (B) (inv.)	0.86	0.63	0.52	0.38	0.21	0.12
CDI (A) (C)	0.87	0.69	0.55	0.42	0.35	0.28

C = comparative example, inv. = inventive

The results show that the residual acid of the polyester polyol with the inventive carbodiimide is surprisingly degraded much more quickly, despite the lower NCN content, than in the composition comprising the CDI (A) known from the prior art.

Protection against hydrolysis in polyethylene terephthalate (PET)

To evaluate the hydrolysis-stabilizing effect in PET, 1.5% by weight of the carbodiimides under investigation were each dispersed into PET by means of a laboratory twin screw extruder ZSK 25 from Werner & Pfleiderer prior to the measurement described below. F3 standard test specimens used for measuring the tensile strength were then prepared from the pellets obtained on an injection moulding machine of the type Arburg Allrounder 320 S 150 – 500.

For the hydrolysis test, these F3 standard test specimens were stored in water vapour at a temperature of 110°C and the tensile strength thereof measured in MPa.

The results are listed in Table 3:

Tensile strength (MPa)	Ex. 1 (comp.) (PET)	Ex. 2 (comp.) (PET, 1 x extruded)	Ex. 3 (comp.) (PET/CDI A)	Ex. 4 (comp.) (PET/CDI D)	Ex. 5 (inv.) (PET/CDI F)	Ex. 6 (inv.) (PET/CDI G)
0 days	84	62	82	88	80	89
1 day	73	41	62	76	77	77
2 days	72	21	-	-	-	-
3 days	50	0	2	76	72	71
4 days	25		0	70	68	68
5 days	8			37	37	46

comp. = comparative example, inv. = inventive

Protection against hydrolysis in polylactic acid (PLA)

- 5 To evaluate the hydrolysis-stabilizing effect in PLA, 1.0 or 1.5% by weight of the carbodiimides under investigation were each dispersed into PLA by means of a laboratory twin screw extruder ZSK 25 from Werner & Pfleiderer prior to the measurement described below. F3 standard test specimens used for measuring the tensile strength were then prepared from the pellets obtained on an injection moulding machine of the type Arburg Allrounder 320 S 150 – 500.
- 10 For the hydrolysis test, these F3 standard test specimens were stored in water at a temperature of 65°C and the tensile strength thereof measured.

The results are listed in Table 4:

Tensile strength (MPa)	Ex. 7 (comp.) (PLA)	Ex. 8 (comp.) (PLA, CDI E) 1.0%/1.5%	Ex. 9 (comp.) (PLA, CDI D) 1.0%/1.5%	Ex. 10 (inv.) (PET, CDI F) 1.0%/1.5%
0 days	76	75/73	77/74	77/75
1 day	63	67/-	-	-
2 days	47	69/-	-	-
3 days	25	58/-	73/73	74/75
4 days	7	32/-	61/71	-
5 days	0	-	-	-
7 days		0/46	8/43	50/74
8 days		-/37	0/35	41/-
9 days		-/19	-/21	23/74
10 days		-/10	-/15	8/74
15 days		-/0	-/0	0/63
18 days				-/53

comp. = comparative example, inv. = inventive

% = data in % by weight

The data in Table 4 correspond to the values of 1.0% / 1.5% of the relevant CDIs.

- 5 The results from Tables 3 and 4 show that the carbodiimides according to the invention show excellent protection against hydrolysis in PET and PLA compared to the prior art. Moreover, these have the advantage that these are based on more favourable raw materials and are considerably less expensive to manufacture.

Experiments on the ability to pelletize and meterability of the solid carbodiimides

To elucidate the finishability, handling and meterability of the various solid carbodiimides, these were compared with respect to appearance, ability to pelletize and softening point. The softening points were determined by means of a Koffler bank.

5 The results are listed in Table 5:


Carbodiimide	Appearance (at RT)	Ability to pelletize	Meterability (T to 40°C)	Softening point (°C)
CDI (C), comp.	hard, sticky mass	not possible	not possible	< 20
CDI (D), comp.	solid, brittle	very good	satisfactory	ca. 50
CDI (E), comp.	solid, waxy	not possible	adequate	< 40
CDI (F), inv.	solid, brittle	very good	good	> 50
CDI (G), inv.	solid, brittle	very good	very good	> 60

comp. = comparative example, inv. = inventive

10 The results from Table 5 clearly show that the carbodiimides according to the invention based on diethyltoluenediisocyanate end-capped with ethanol or cyclohexanol, despite the lower degree of polymerization, have excellent capacity for pelletization and a high softening point compared to the polymeric carbodiimide based on diethyltoluenediisocyanate (non-terminally functionalized) and therefore entail advantages in the finishing and metered addition of the solid in the stabilization of the ester-based polymers.

Claims

1. Carbodiimides having terminal urea and/or urethane groups of the formula

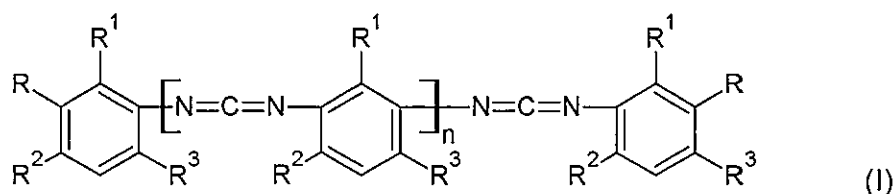

5

- in which R may be the same or different and is selected from the group of -NHCONHR^I, -NHCONR^IR^{II} and -NHCOOR^{III} residues, where R^I and R^{II} are the same or different and are a C₁ – C₂₂-alkyl, C₆ – C₁₂-cycloalkyl, C₆ – C₁₈-aryl or C₆ – C₁₈-aralkyl residue and R^{III} corresponds to C₁ – C₂₂-alkyl, C₆ – C₁₂-cycloalkyl, C₆ – C₁₈-aryl or C₆ – C₁₈-aralkyl, or an unsaturated alkyl residue having 2-22, preferably 12-20, particularly preferably 16-18 carbon atoms, or an alkoxypolyoxyalkylene residue,

10

- R¹, R² and R³ are each independently methyl or ethyl, wherein each benzene ring has only one methyl group and

- n = 0 to 20, preferably n = 1 to 10.

15

2. Carbodiimides according to Claim 1, characterized in that R is an -NHCOOR^{III} residue where R^{III} is an alkoxypolyoxyalkylene or an unsaturated alkyl residue having 18 carbon atoms, and R¹, R² and R³ are each independently methyl or ethyl, wherein each benzene ring has only one methyl group and n = 0 to 20, preferably n = 1 to 10, particularly preferably n = 1 to 4, especially preferably n = 2 to 3.


20

3. Carbodiimides according to Claim 1, characterized in that R is an -NHCOOR^{III} residue, where R^{III} is a C₁ – C₂₂-alkyl, preferably C₁ – C₆-alkyl, particularly preferably methyl, ethyl or i-propyl, C₆ – C₁₂-cycloalkyl, preferably C₆-cycloalkyl, and R¹, R² and R³ are each independently methyl or ethyl, wherein each benzene ring has only one methyl group and n = 0 to 20, preferably n = 1 to 10, particularly preferably n = 3 to 8.


25

4. Carbodiimides according to either of Claims 1 and 2, characterized in that R^{III} is a polyethylene glycol monomethyl ether with molar masses of 200 - 600 g/mol, preferably 350 - 550 g/mol.

5. Carbodiimides according to Claim 2, characterized in that the NCN content in the carbodiimide is 2 - 14% by weight, preferably 4 - 10% by weight, particularly preferably 4 - 8% by weight, more preferably 5 - 7% by weight.
6. Carbodiimides according to Claim 3, characterized in that the NCN content in the carbodiimide is 2 - 14% by weight, preferably 4 - 14% by weight, particularly preferably 10 - 13% by weight.
7. Carbodiimides according to any of Claims 1 to 6, characterized in that said carbodiimides have average molar masses (M_w) of 1000 - 5000 g/mol, preferably 1500 - 4000 g/mol, particularly preferably 2000 - 3000 g/mol.
8. Carbodiimides according to any of Claims 1 to 7, characterized in that said carbodiimides have a polydispersity $D = M_w/M_n$ of 1.2 - 2, preferably 1.4 - 1.8.
9. Method for preparing the carbodiimides according to any of Claims 1 to 8, characterized in that diisocyanates of the formula

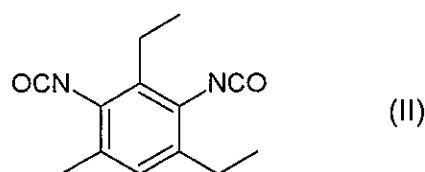


and/or of the formula

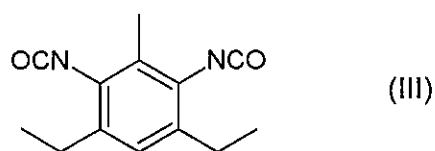


are carbodiimidized with elimination of carbon dioxide at temperatures of 80°C to 200°C in the presence of catalysts and optionally solvent and subsequently the free NCO functionalities are terminally functionalized with primary or secondary amines or alcohols.

10. Method for preparing the carbodiimides according to any of Claims 1 to 8, characterized in that initially a partial, preferably <50% terminal functionalization of the free NCO groups in the aromatic diisocyanates of the formula (II)

- 18 -

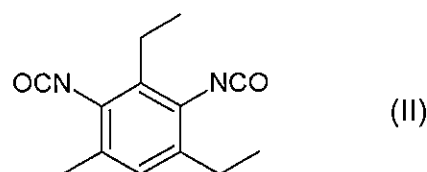

and/or of the formula (III)



is carried out with primary or secondary amines or alcohols and/or
alkoxypolyoxyalkylene alcohols and subsequently a carbodiimidization is carried
out with elimination of carbon dioxide at temperatures of 80°C to 200°C in the
presence of catalysts and optionally solvent.

11. Method according to Claim 9, characterized in that the carbodiimidization is carried
out at temperatures of 80 - 200°C, preferably 120 - 140°C, preferably in the
presence of a catalyst, and subsequently, optionally after distilling off the catalyst
at temperatures of 50 - 120°C and the unreacted diisocyanate at temperatures of
160 - 180°C, the remaining NCO groups of the carbodiimide are reacted with
aliphatic and/or aromatic amines, alcohols and/or alkoxypolyoxyalkylene alcohols,
preferably polyethylene monomethyl ether and/or oley alcohol, at temperatures of
80 - 140°C, optionally in the presence of a PU catalyst.
12. Method according to Claim 9, characterized in that the carbodiimidization is carried
out at temperatures of 80 - 200°C, preferably 120 - 140°C, preferably in the
presence of a catalyst, subsequently the temperature of the reaction mixture is
reduced to 50 - 120°C, preferably 60 - 100°C, particularly preferably to 80 - 90°C
to interrupt the carbodiimidization and, optionally after addition of a solvent,
preferably selected from the group of alkylbenzenes, particularly preferably
toluene, the free terminal isocyanate groups of the carbodiimides are reacted with
aliphatic and/or aromatic amines, alcohols and/or alkoxypolyoxyalkylene alcohols.
13. Method for preparing carbodiimides according to either of Claims 9 and 10,
characterized in that a mixture of diisocyanates of the formula (II) and (III) is
carbodiimidized in a ratio of 70 : 30 to 90 : 10.

14. Method for preparing the carbodiimides according to Claim 3, characterized in that, after the carbodiimidization, the melt is pelletized, preferably on pelletizing belts.
- 5 15. Method according to Claim 14, characterized in that in the carbodiimides according to Claim 3, R^{III} = cyclohexyl.
16. Composition comprising
- 10 - at least one ester-based polymer, preferably selected from the group of polyester polyols, ester-based thermoplastic polyurethanes, polyurethane elastomers, PU adhesives, PU casting resins, polyethylene terephthalates (PET), polybutylene terephthalates (PBT), polytrimethylene terephthalates (PTT), copolyesters, thermoplastic polyester elastomers (TPE E), ethylene vinyl acetates (EVA), polylactic acids (PLA), polybutylene adipate terephthalates (PBAT), polybutylene succinates (PBS), PLA derivatives and/or polyhydroxyalkanoates (PHA)
- and
- 15 - at least one carbodiimide according to any of Claims 1 to 8.
17. Composition according to Claim 16, characterized in that the concentration of the carbodiimide is 0.1 - 5% by weight, preferably 0.5 - 3% by weight, particularly preferably 1 - 2% by weight.
- 20 18. Method for preparing the compositions according to Claim 16 or 17, characterized in that carbodiimides according to Claim 3 are added by means of a solids metering unit to the ester-based polymers selected from the group comprising polyethylene terephthalate (PET), polybutylene terephthalate (PBT), polytrimethylene terephthalate (PTT), thermoplastic polyurethanes (TPU), copolyesters such as the modified polyester of cyclohexanediol and terephthalic acid (PCTA), thermoplastic polyester elastomers (TPE E), ethylene vinyl acetate (EVA), polylactic acid (PLA), polybutylene adipate terephthalate (PBAT), polybutylene succinates (PBS), PLA derivatives and/or polyhydroxyalkanoates (PHA).
- 25
- 30 19. Use of the carbodiimides according to any of Claims 1 to 8 as protection against hydrolytic degradation in ester-based polyols, in polyethylene terephthalate (PET), in polybutylene terephthalate (PBT), in polytrimethylene terephthalate (PTT), in copolyesters, in thermoplastic polyester elastomers (TPE E), in ethylene vinyl acetate (EVA), in polylactic acid (PLA) and/or in PLA derivatives, in polybutylene

- 20 -

- 5 adipate terephthalates (PBAT), in polybutylene succinates (PBS), in polyhydroxyalkanoates (PHA), in blends, in triglycerides, preferably trimethylolpropane trioleate (TMP oleate), in oil formulations for the lubricants industry, in thermoplastic polyurethanes (TPU), in polyurethane elastomers, in PU adhesives, in PU casting resins, in PU foams or in PU coatings for wood, leather, artificial leather and textiles.
20. Use of the carbodiimides according to any of Claims 1 to 8 in polylactic acid (PLA).