



(51) International Patent Classification:

C10M 169/04 (2006.01) *C10N 30/02* (2006.01)
C10M 105/32 (2006.01) *C10N 30/06* (2006.01)
C10M 105/34 (2006.01) *C10N 30/08* (2006.01)
C10N 20/02 (2006.01)

(21) International Application Number:

PCT/US2014/066340

(22) International Filing Date:

19 November 2014 (19.11.2014)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/919,931 23 December 2013 (23.12.2013) US

(71) Applicant: **EXXONMOBIL RESEARCH AND ENGINEERING COMPANY** [US/US]; 1545 Route 22 East, P.O. Box 900, Annandale, NJ 08801-0900 (US).

(72) Inventors: **GAO, Jason, Z.**; 2 Buttonwood Way, Ross Valley, PA 19063 (US). **BAINBRIDGE, Samuel, C.**; 2458 Almond Street, Philadelphia, PA 19125 (US). **GAAL, Dennis, A.**; 437 Azure Lane, Glassboro, NJ 08028 (US). **YOUNG, Tomasz, M.**; 614 Kenilworth Street, Philadelphia, PA 19147 (US).

(74) Agents: **MIGLIORINI, Robert A.** et al.; Exxonmobil Research and Engineering Company, 1545 Route 22 East, P.O. Box 900, Annandale, NJ 08801-0900 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: LOW VISCOSITY ESTER LUBRICANT AND METHOD FOR USING

Fig. 4

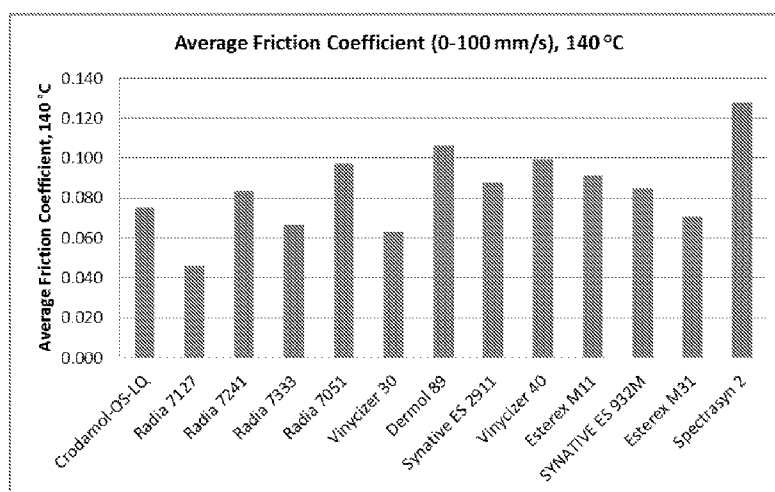

(57) Abstract: According to the present disclosure, there is provided a high-temperature lubricant composition. The composition has an amount of an ester. The ester exhibits a kinematic viscosity at 100 °C of 1 to 4 centistokes and a kinematic viscosity ratio at 150°C/100°C of 0.6 or higher. The composition is at a temperature of 100 °C to 150 °C. There is also another lubricating composition having the ester and a polymeric viscosity modifier. There are also methods for using the lubricating compositions in the crank-case of an engine.

