

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
18 January 2001 (18.01.2001)

PCT

(10) International Publication Number
WO 01/04056 A1

- (51) **International Patent Classification⁷:** C02F 1/22, B01D 53/62

(21) **International Application Number:** PCT/US00/13506

(22) **International Filing Date:** 18 May 2000 (18.05.2000)

(25) **Filing Language:** English

(26) **Publication Language:** English

(30) **Priority Data:**

09/350,906	12 July 1999 (12.07.1999)	US
09/375,410	17 August 1999 (17.08.1999)	US
09/397,500	17 September 1999 (17.09.1999)	US
09/500,422	9 February 2000 (09.02.2000)	US

(71) **Applicant:** MARINE DESALINATION SYSTEMS, L.L.C. [US/US]; 1211 Connecticut Avenue, N.W., Suite 302, Washington, DC 20036-2603 (US).

(72) **Inventor:** MAX, Michael, David; 2457 39th Place, N.W., Washington, DC 20007 (US).

(74) **Agents:** HYND, Joseph, A. et al.; Rothwell, Figg, Ernst & Manbeck, 555 13th Street N.W., Suite 701 East, Columbia Square, Washington, DC 20004 (US).


(81) **Designated States (national):** AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(84) **Designated States (regional):** ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:
— With international search report.

[Continued on next page]

(54) Title: DESALINATION USING POSITIVELY BUOYANT OR NEGATIVELY BUOYANT/ASSISTED BUOYANCY HYDRATE AND CONCOMITANT CARBON DIOXIDE CAPTURE YIELDING LIQUID CARBON DIOXIDE

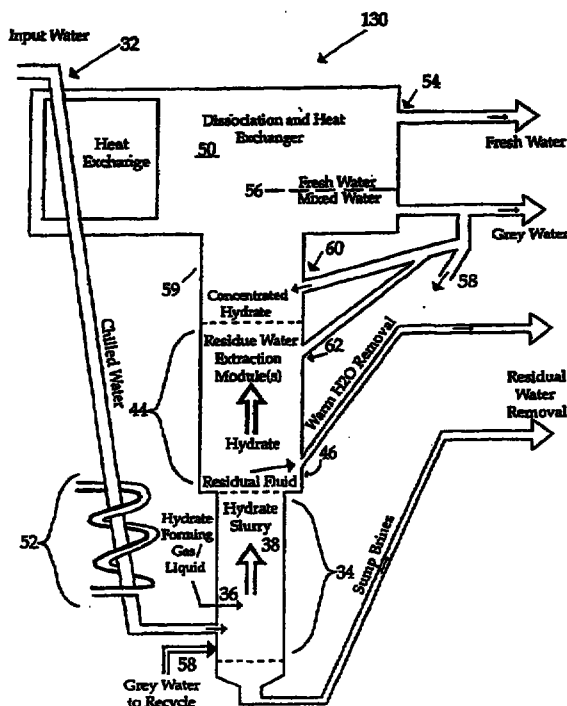

(57) Abstract: Methods and apparatus for desalination of salt water (and purification of polluted water) are disclosed. Saline (or otherwise polluted) water is pumped to a desalination installation and down to the base of a desalination fractionation column, where it is mixed with hydrate-forming gas or liquid to form either positively buoyant (also assisted buoyancy) or negatively buoyant hydrate. The hydrate rises or sinks or is carried into a lower pressure area and dissociates (melts) into the gas and pure water. In preferred embodiments, residual salt water which is heated by heat given off during formation of the hydrate is removed from the system to create a bias towards overall cooling as the hydrate dissociates endothermically at shallower depths, and input water is passed through regions of dissociation in heat-exchanging relationship therewith so as to be cooled sufficiently for hydrate to form at pressure-depth. The fresh water produced by the system is cold enough that it can be used to provide refrigeration, air conditioning, or other cooling; heat removed from the system with the heated residual water can be used for heating or other applications. In other embodiments, desalination or other purification is carried out in "artificially" or mechanically pressurized vessels, which embodiments may be comparatively mobile. Such pressurized systems can be used to capture carbon dioxide from industrial waste gases and to provide liquid carbon dioxide.

WO 01/04056 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.