

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H01Q 11/08		A1	(11) International Publication Number: WO 96/06468
			(43) International Publication Date: 29 February 1996 (29.02.96)
(21) International Application Number: PCT/GB95/01982			(81) Designated States: AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, <u>SG</u> , SI, SK, TJ, TM, TT, UA, UG, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ, UG).
(22) International Filing Date: 21 August 1995 (21.08.95)			
(30) Priority Data: 9417450.5 25 August 1994 (25.08.94) GB 9424150.2 30 November 1994 (30.11.94) GB			
(60) Parent Application or Grant (63) Related by Continuation US 08/351,631 (CIP) Filed on 6 December 1994 (06.12.94)			
(71) Applicant (for all designated States except US): NAVSTAR SYSTEMS LIMITED [GB/GB]; Mansard Close, Westgate, Northampton NN5 5DL (GB).			
(72) Inventor; and (75) Inventor/Applicant (for US only): LEISTEN, Oliver, Paul [GB/GB]; 90 Weggs Farm Road, Duston, Northampton NN5 6HZ (GB).			Published With international search report.
(74) Agents: BLATCHFORD, William, Michael et al.; Withers & Rogers, 4 Dyer's Buildings, Holborn, London EC1N 2JT (GB).			


SG 9700741-3

- ① PCT + SR
- ② IPER + Annexes
- ③ Replacement sheet

(54) Title: AN ANTENNA

(57) Abstract

An antenna for use at UHF and upwards has a cylindrical ceramic core (12) with a relative dielectric constant of at least 5. A three-dimensional radiating element structure, consisting of helical antenna elements (10A - 10D) on the cylindrical surface of the core (12) and connecting radial elements (10AR - 10AD) on a distal end face (12D) of the core, is formed by conductor tracks plated directly on the core surfaces. At the distal end face the elements are connected to an axially located feed structure in a plated axial passage (14) of the core (12). The antenna elements are connected together by a plated sleeve (20) covering a proximal part of the core (12) which, in conjunction with the feeder structure, forms an integral balun for matching to an unbalanced feeder. Since the ceramic core fills the major part of the interior volume defined by the radiating element structure, the antenna is very much smaller than an air-cored antenna. It is also mechanically robust and electrically stable.

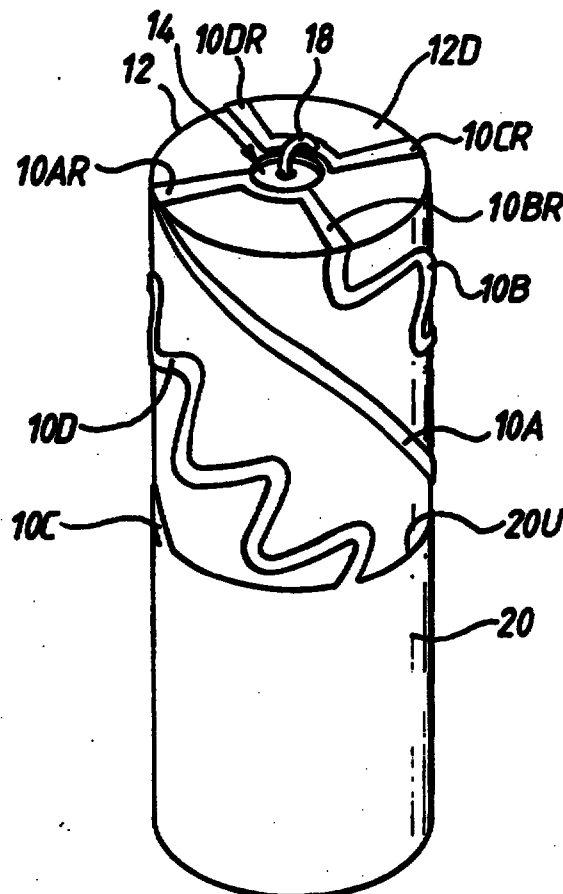

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

9700741-3