

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
03 November 2022 (03.11.2022)



(10) International Publication Number
WO 2022/232272 A1

(51) International Patent Classification:

B24C 5/02 (2006.01) *B05B 7/14* (2006.01)
B05B 1/02 (2006.01) *B24C 3/00* (2006.01)
B05B 7/02 (2006.01) *B24C 3/02* (2006.01)
B05B 7/12 (2006.01)

(21) International Application Number:

PCT/US2022/026536

(22) International Filing Date:

27 April 2022 (27.04.2022)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

17/241,466 27 April 2021 (27.04.2021) US
17/542,074 03 December 2021 (03.12.2021) US

(71) Applicant: **AXXIOM MANUFACTURING, INC.**
[US/US]; 11927 Hwy 6, Fresno, Texas 77545 (US).


(72) Inventor: **NGUYEN, Phuong Taylor**; 11927 Hwy 6, Fresno, Texas 77545 (US).

(74) Agent: **RAO DEBOER OSTERRIEDER, PLLC**; 1334 Brittmoore Rd. Suite 2401, Houston, Texas 77043 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, IT, JM, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,

(54) Title: METHODS AND SYSTEMS FOR ABRASIVE BLASTING

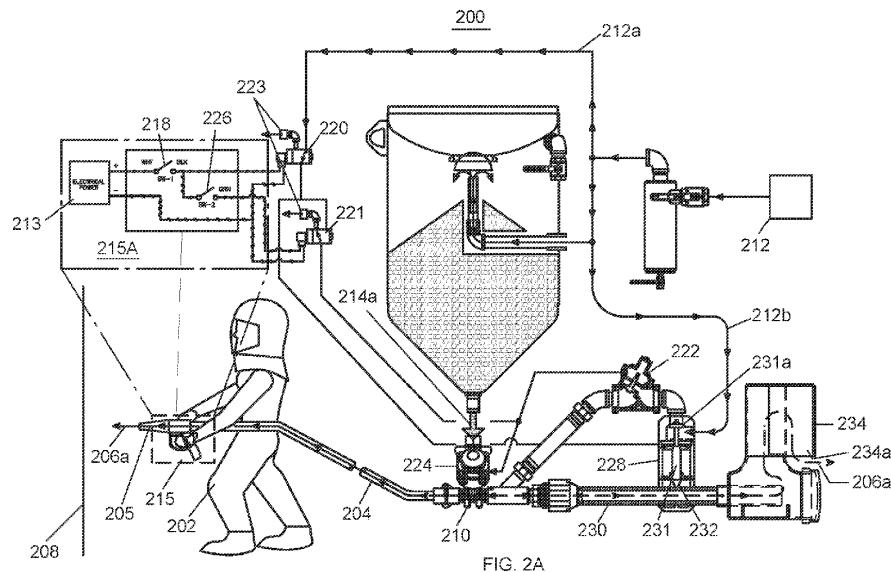

(57) Abstract: An abrasive blasting system that includes a blast hose, and a deadman assembly coupled with the blast hose. The deadman assembly further includes a primary deadman signal device and a secondary deadman signal device. The deadman also has a base frame, with each of the primary deadman signal device and the secondary deadman signal device coupled with the base frame. There is a trigger member movably coupled with the base frame, the trigger member configured to contact and move the primary deadman signal device to a signal-flow position, and also to contact and move the secondary deadman signal device to a secondary signal-flow position.

[Continued on next page]

UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*