



(51) International Patent Classification:
B65D 5/38 (2006.01) **B65D 85/10** (2006.01)

(21) International Application Number:
PCT/EP2010/007258

(22) International Filing Date:
30 November 2010 (30.11.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09015867.6 22 December 2009 (22.12.2009) EP

(71) Applicant (for all designated States except US): **PHILIP MORRIS PRODUCTS S.A.** [CH/CH]; Quai Jeanrenaud 3, CH-2000 Neuchâtel (CH).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **CHATELAIN, Lucas** [CH/CH]; Eden Roc, 11, CH-1073 Savigny (CH).

(74) Agent: **HILGERS, Hans**; Grünecker, Kinkeldey, Stockmair & Schwanhäusser, Leopoldstrasse 4, 80802 München (DE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: SLIDE AND SHELL CONTAINER

FIG. 2

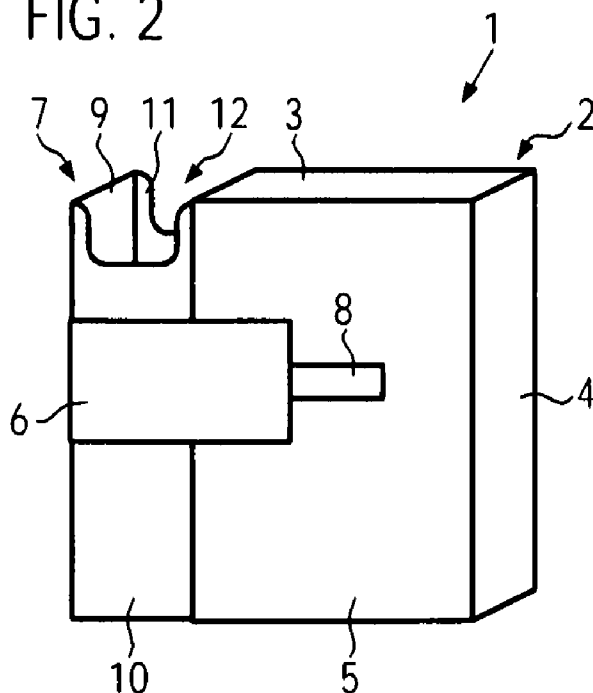

(57) Abstract: A slide and shell container (1), comprising a shell (2), and a slide (7), which is movable in the shell (2) along a sliding path from a closed position to an open position, wherein in the closed position the interior of the container (1) is inaccessible, and wherein in the open position the interior of the container (1) is accessible. The shell (2) comprises a guide slit (8), extending along the sliding path, wherein a guide means (57, 59) of the slide (7) engages with the guide slit (8). Further, a single blank for forming a slide and a single blank for forming a guide means is disclosed.