

FIG. 1

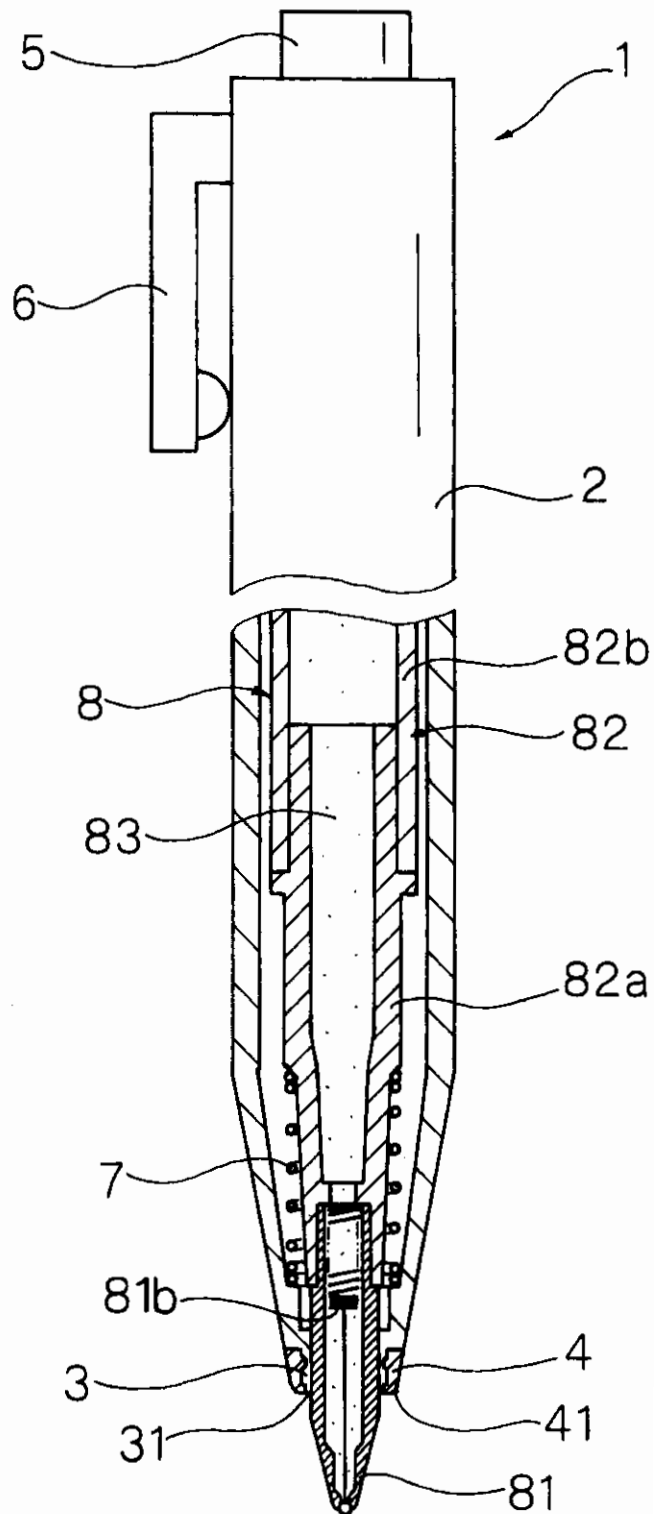


FIG. 2

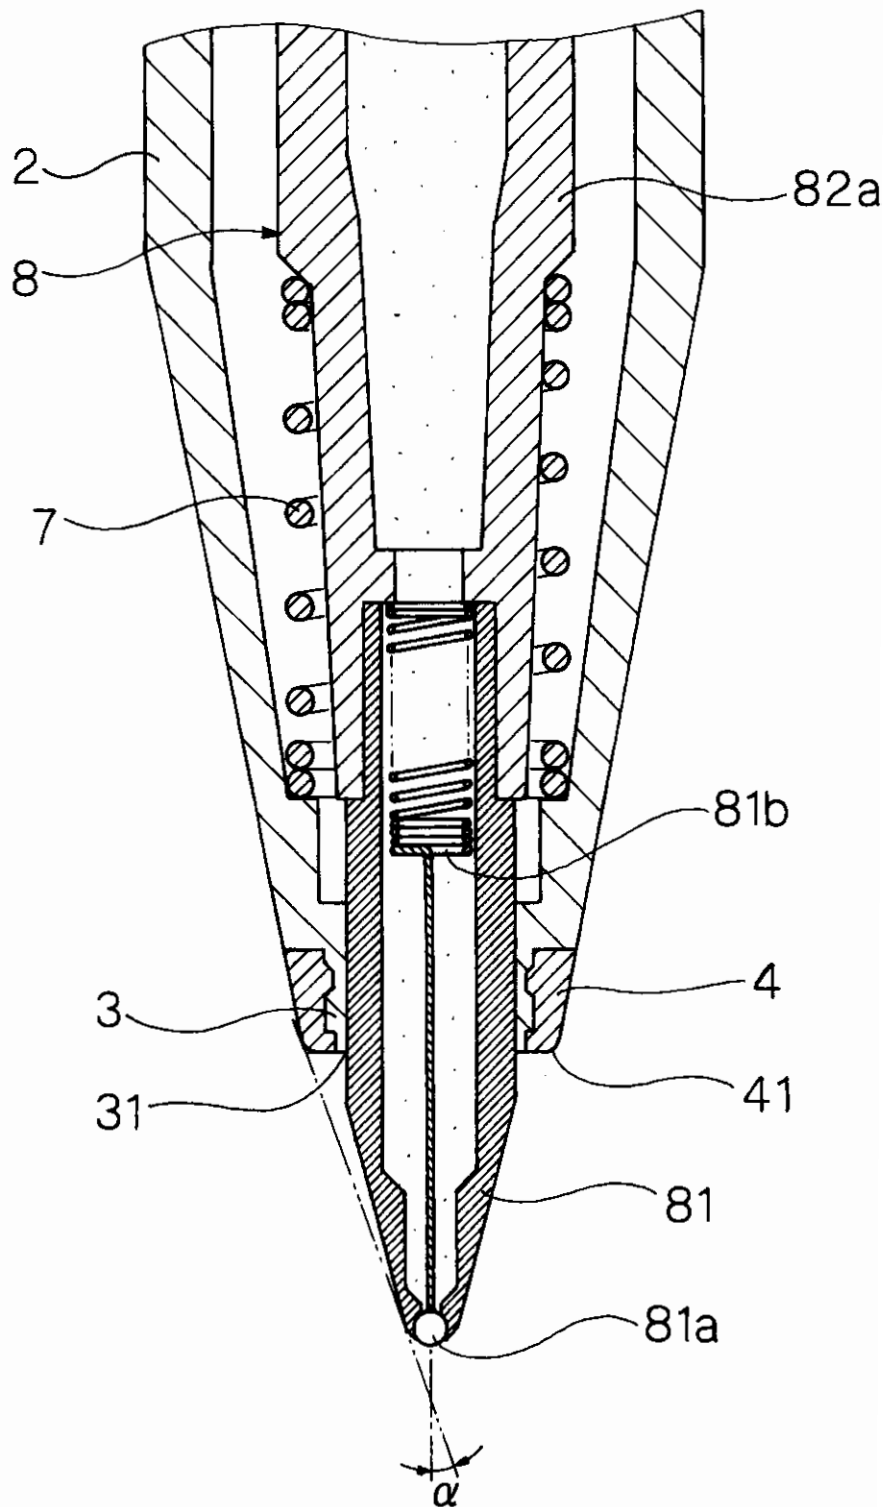


FIG. 3

FIG. 3 is a cross-sectional view of a probe assembly 1. The assembly includes a handle 5, a trigger 6, a main body 2, and a probe tip 3. The probe tip 3 is shown in a cross-section, revealing internal components: a central shaft 8, a sleeve 81, and a tip 4. The sleeve 81 has a flange 82a and a tip 82b. The tip 4 has a flange 41. The probe tip 3 is mounted on a base 31. The handle 5 is connected to the main body 2, which is connected to the probe tip 3. The trigger 6 is located on the side of the main body 2.

FIG. 4

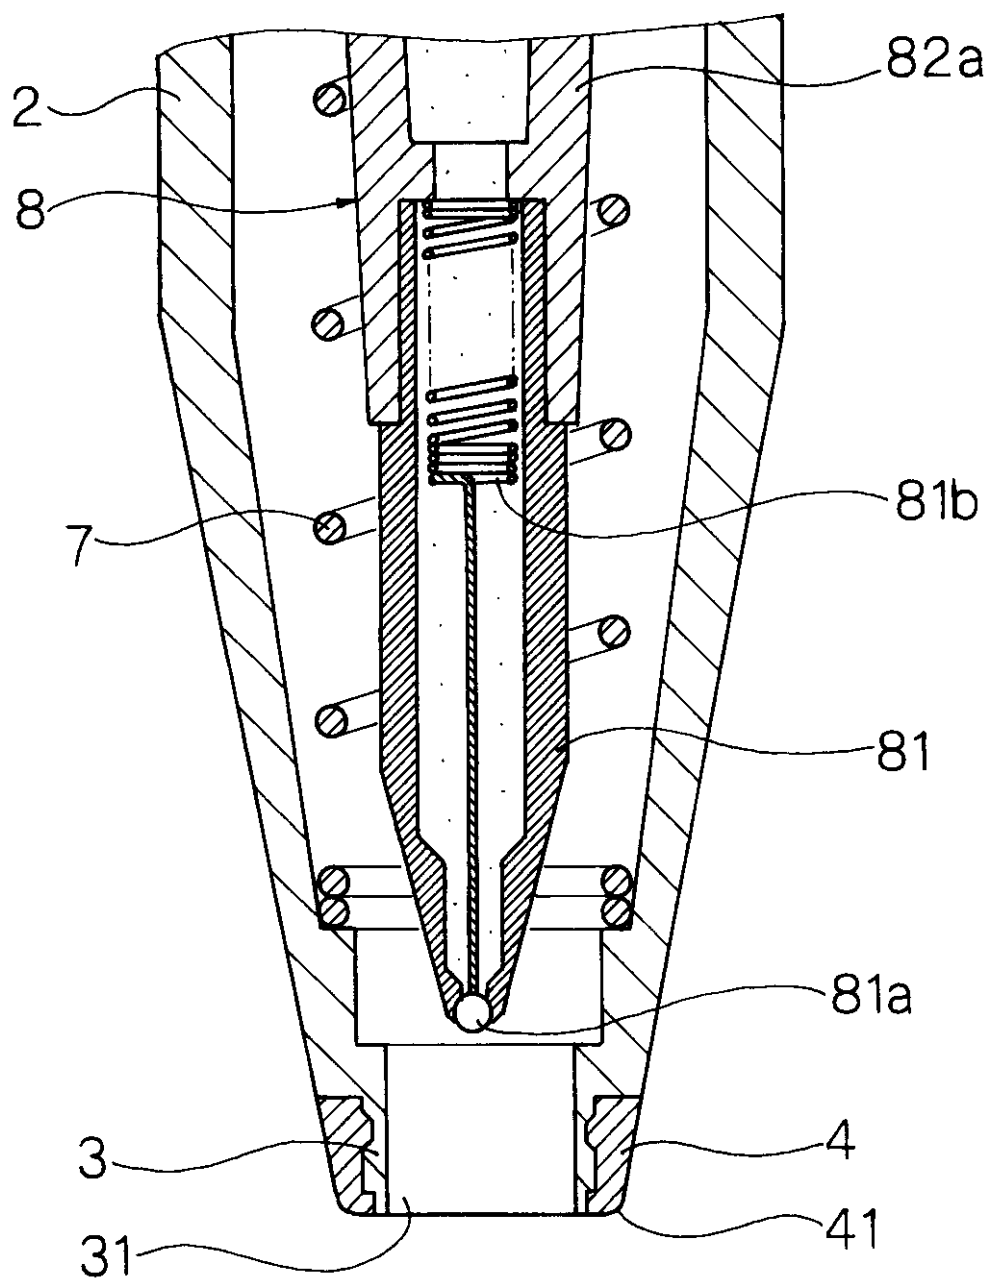


FIG. 5

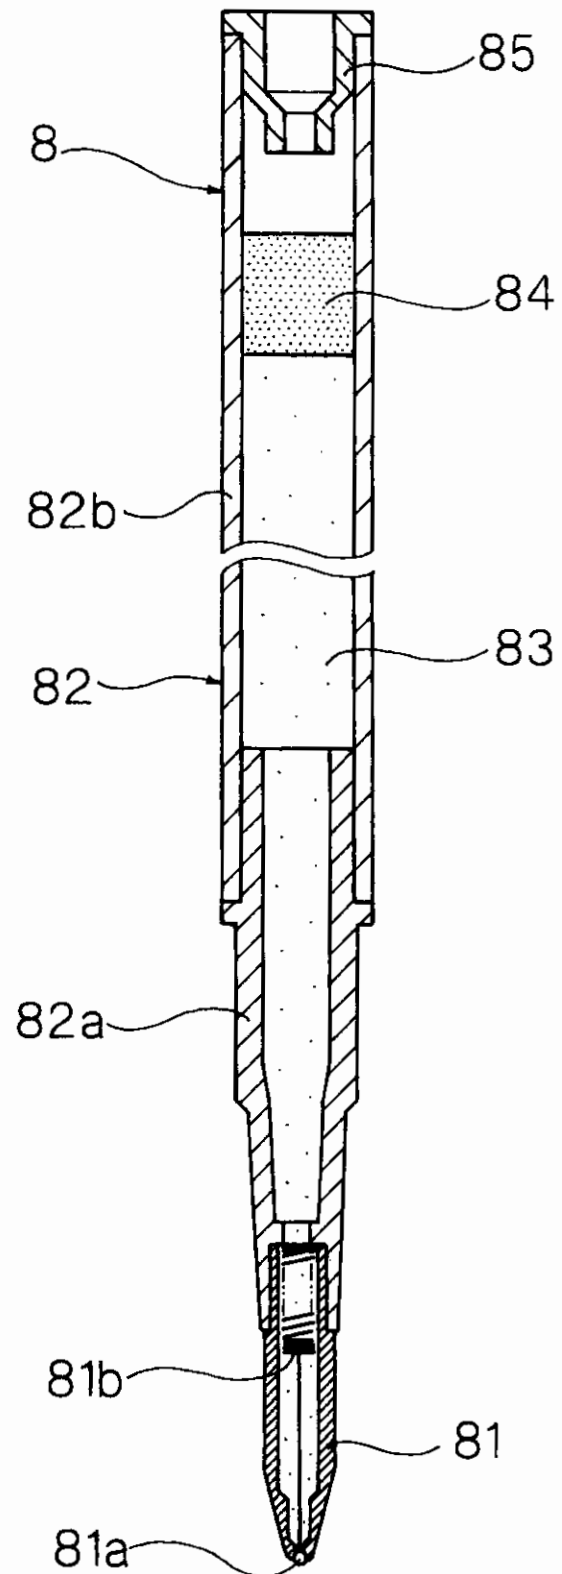


FIG. 6

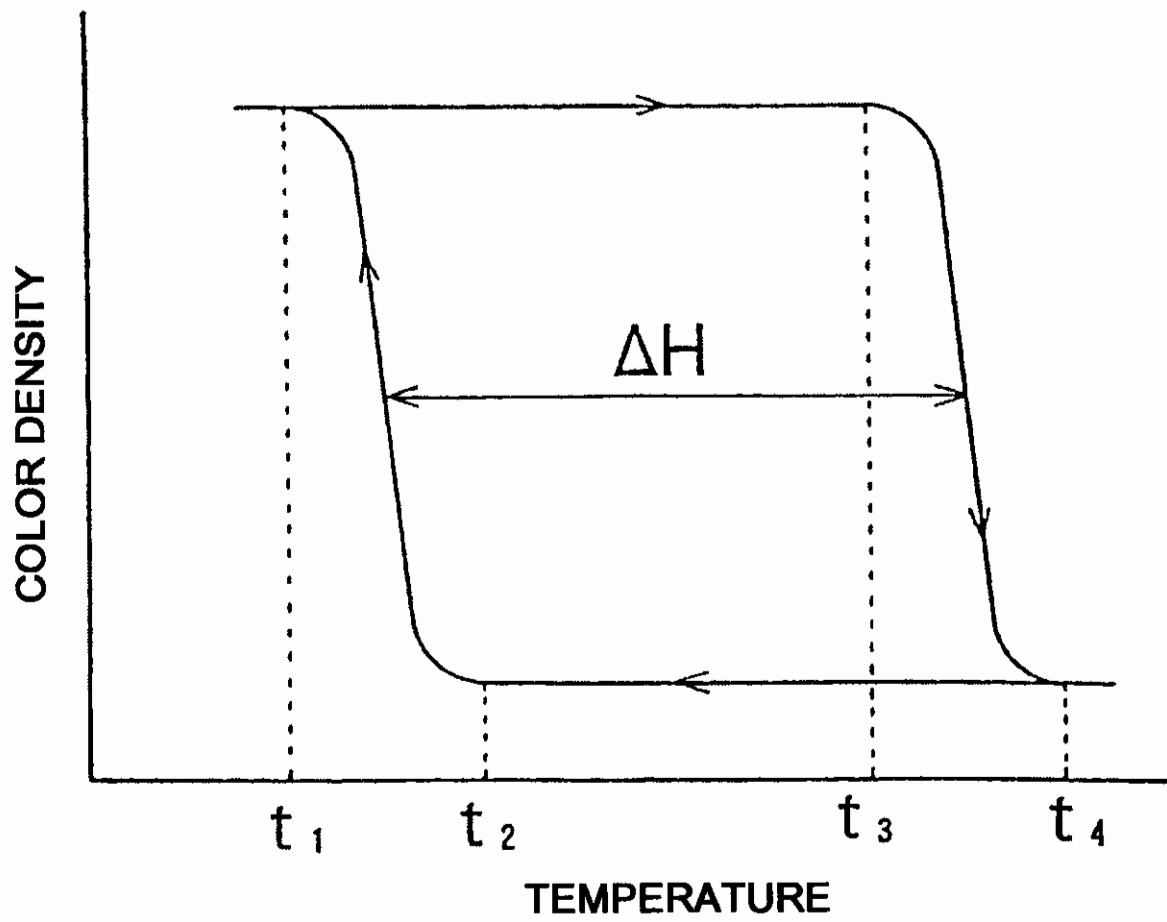


FIG. 7

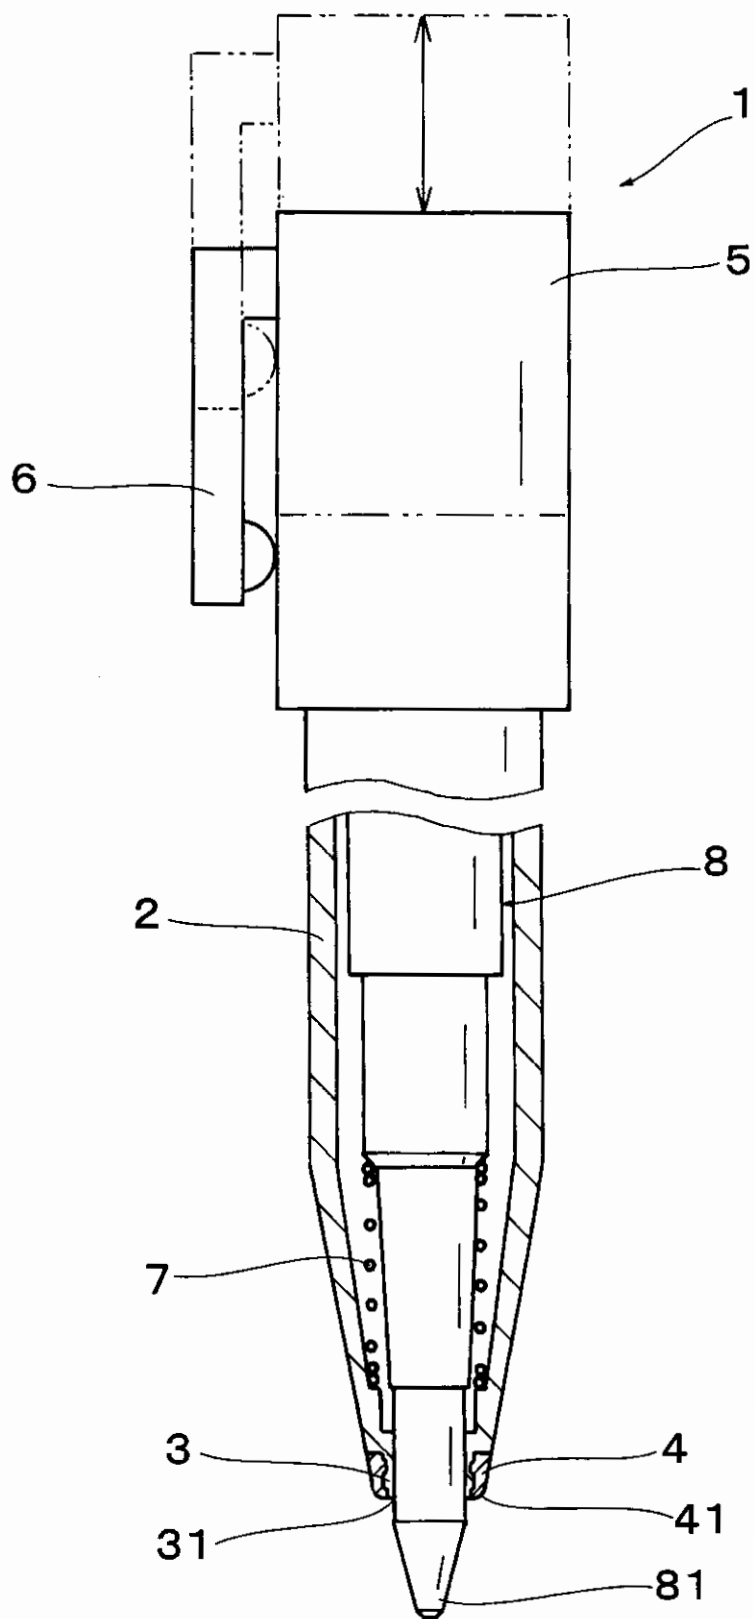


FIG. 8

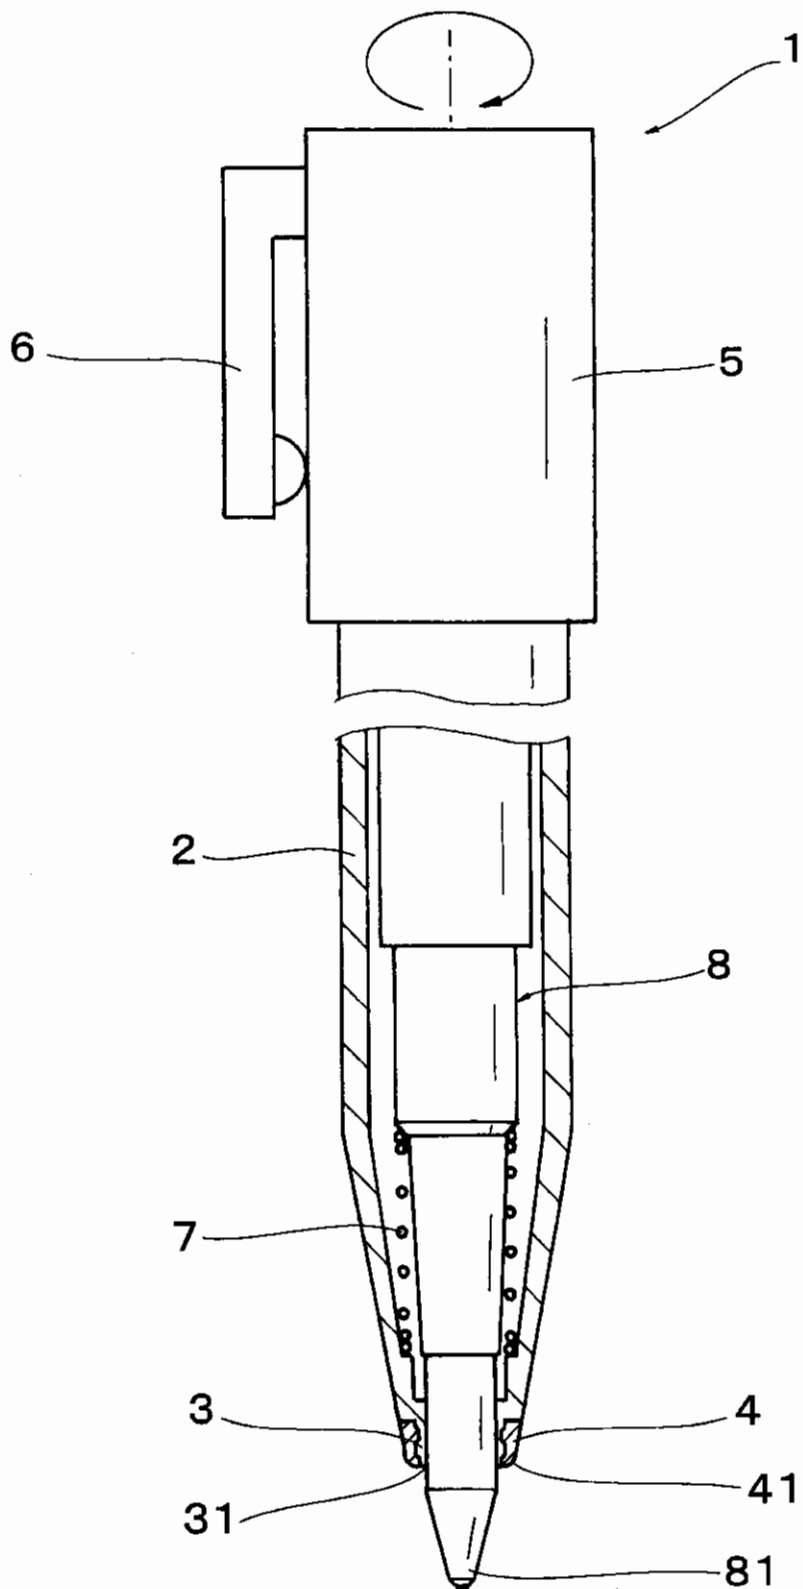
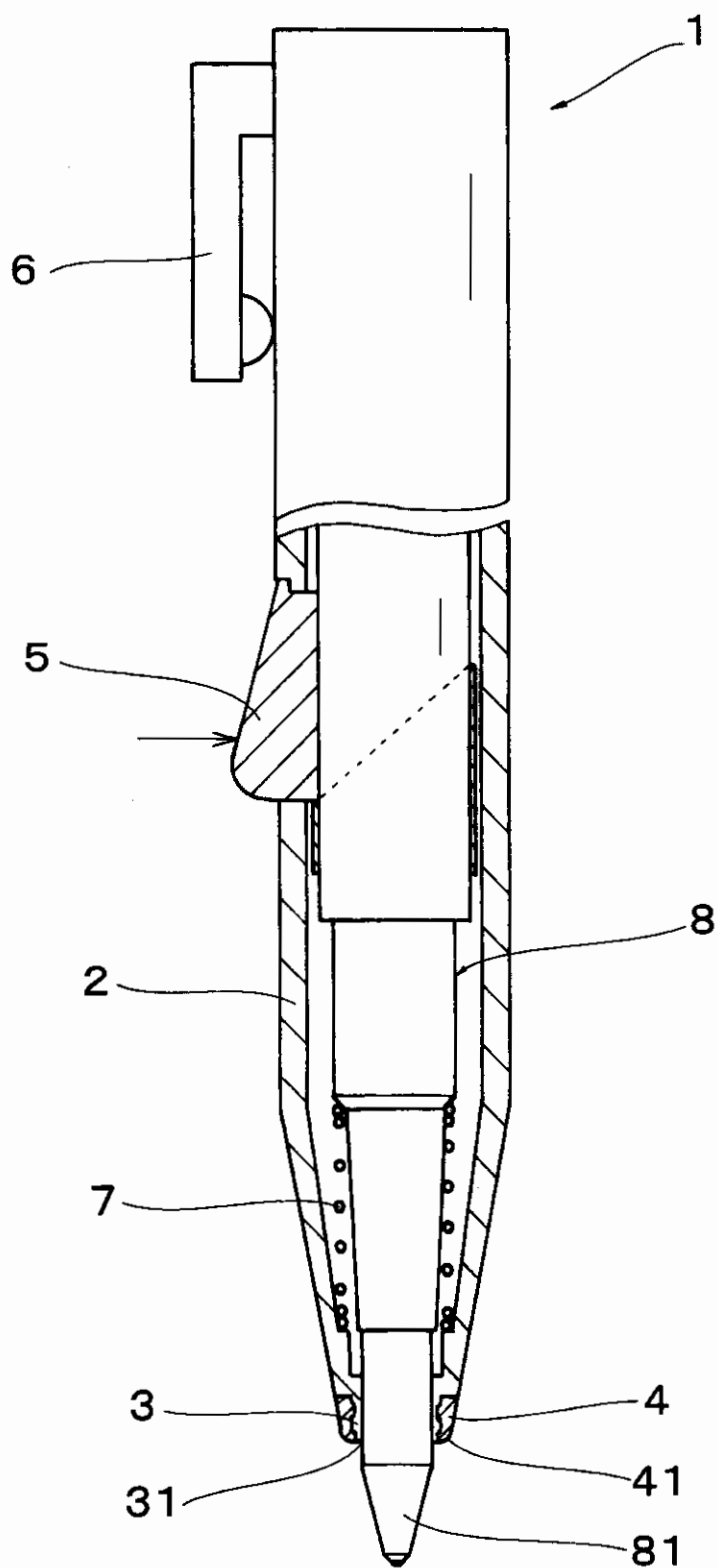


FIG. 9



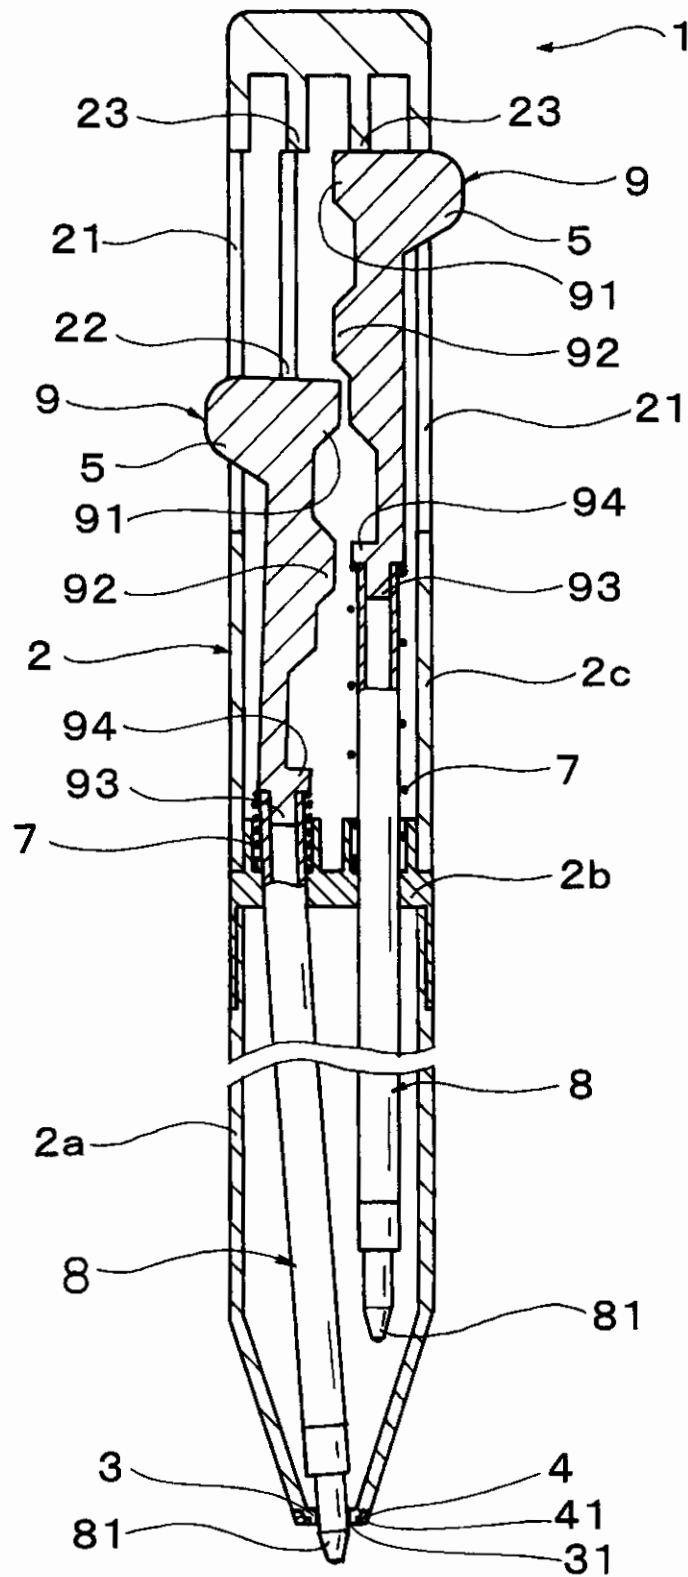


FIG. 11

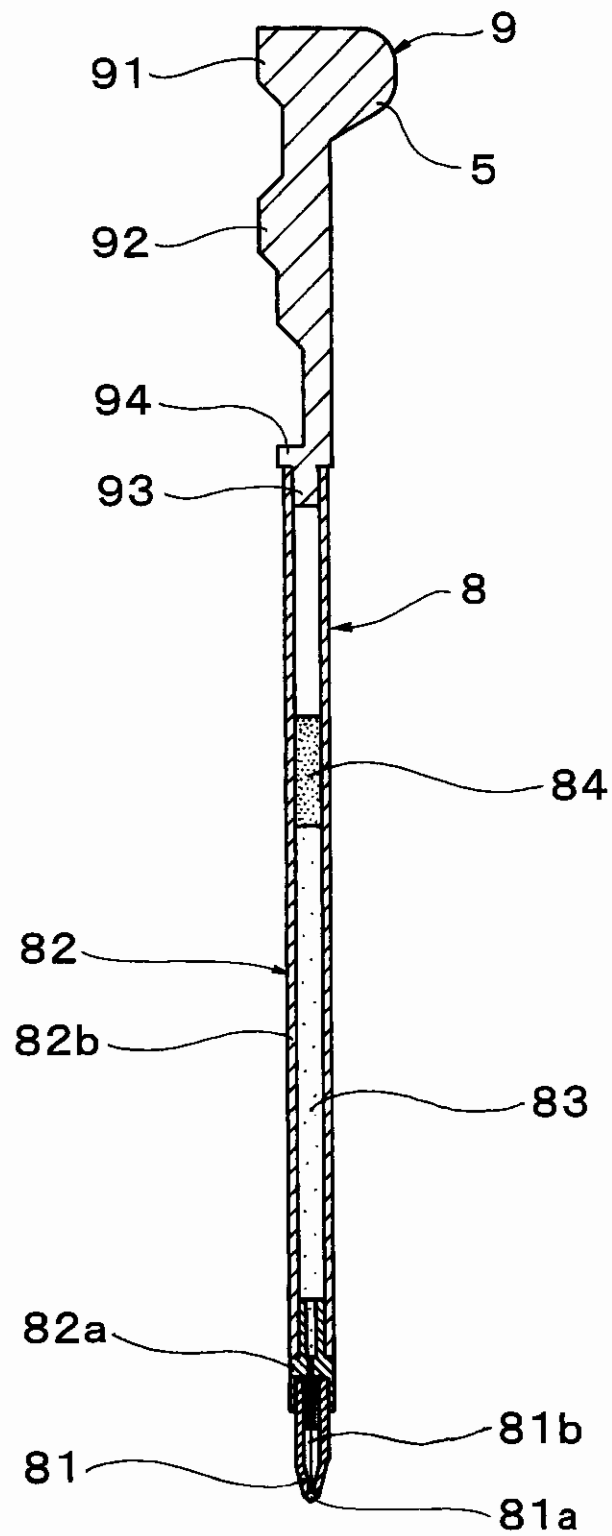


FIG. 12

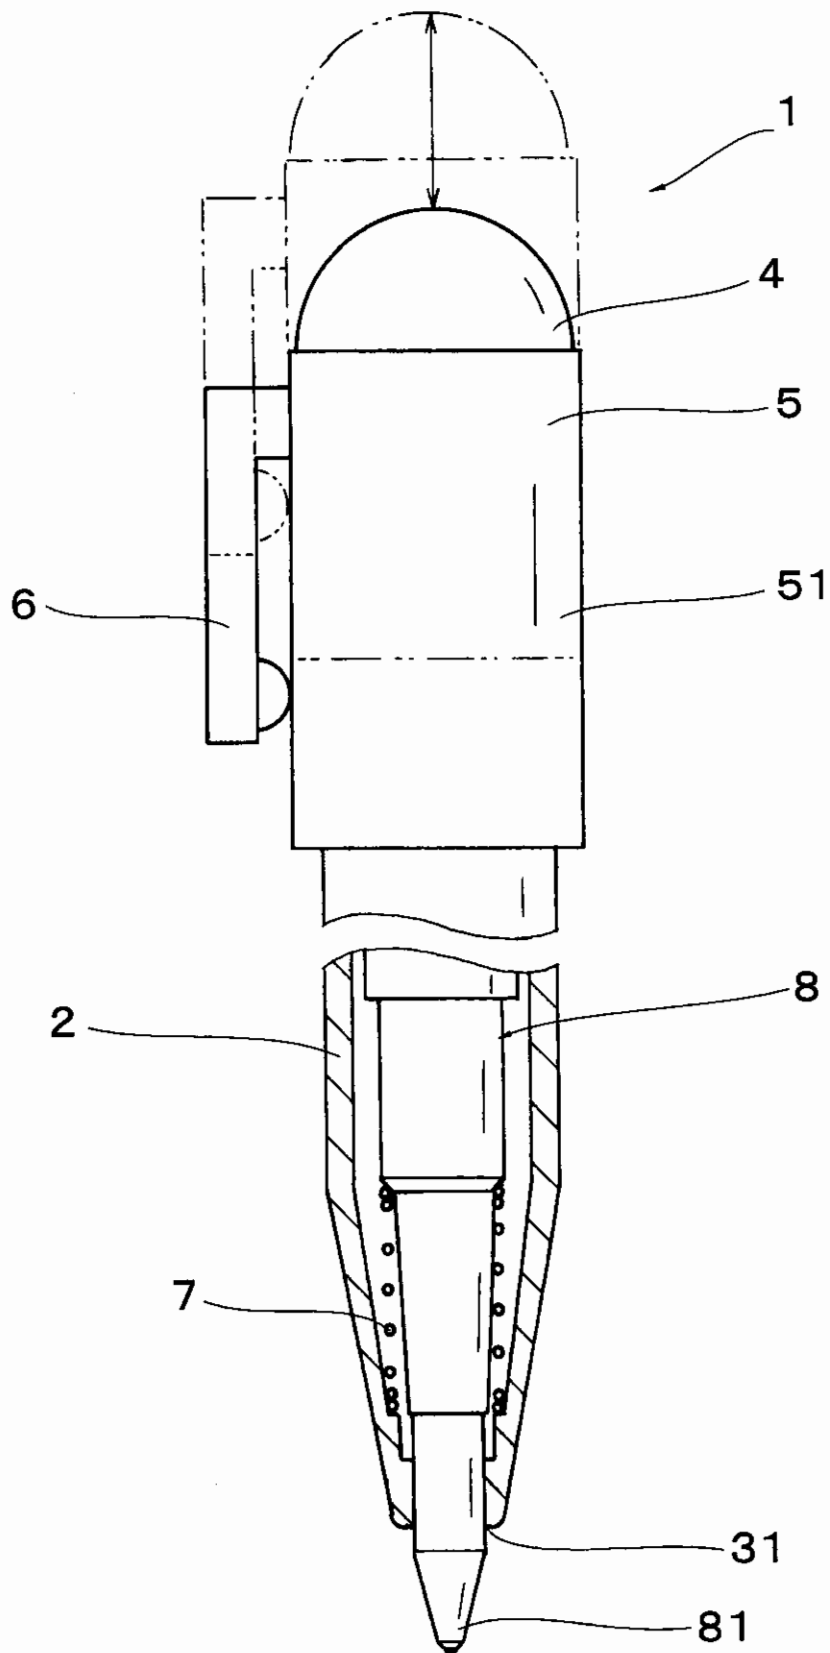


FIG. 13

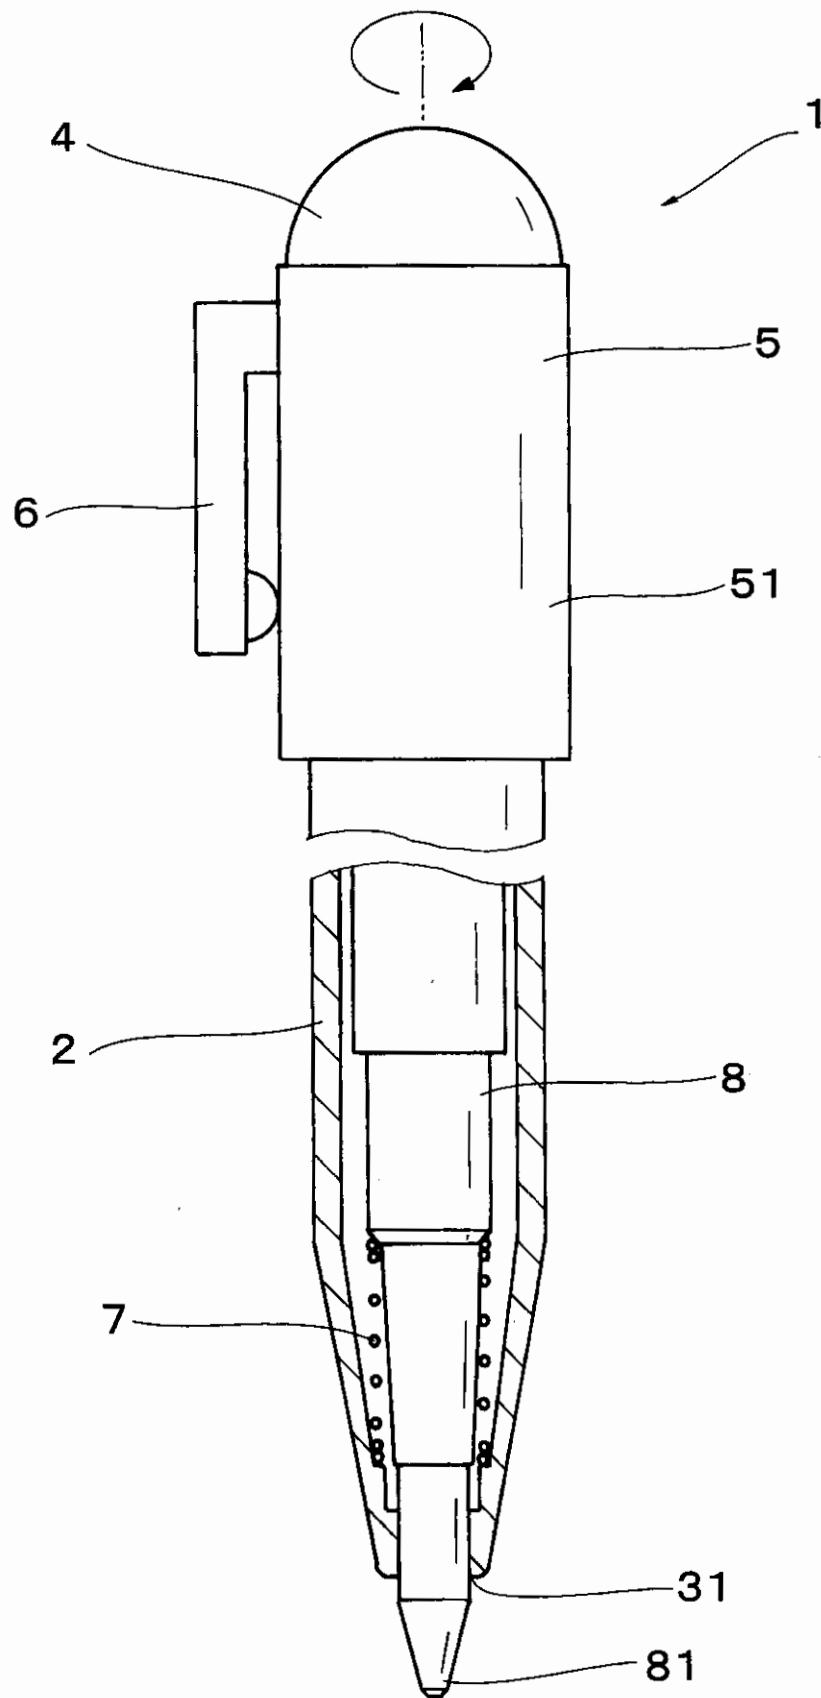


FIG. 14

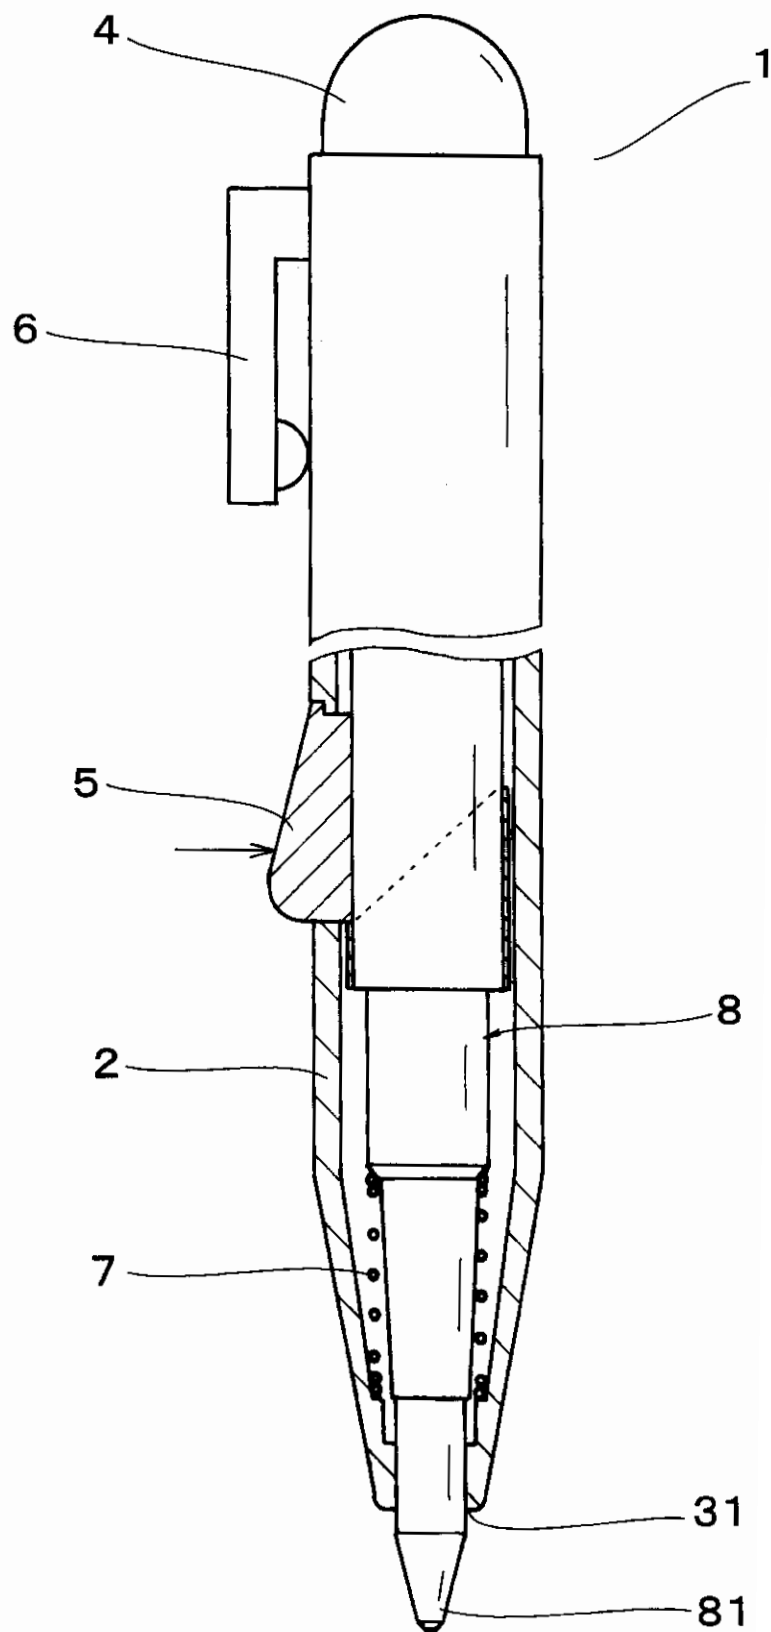


FIG. 15

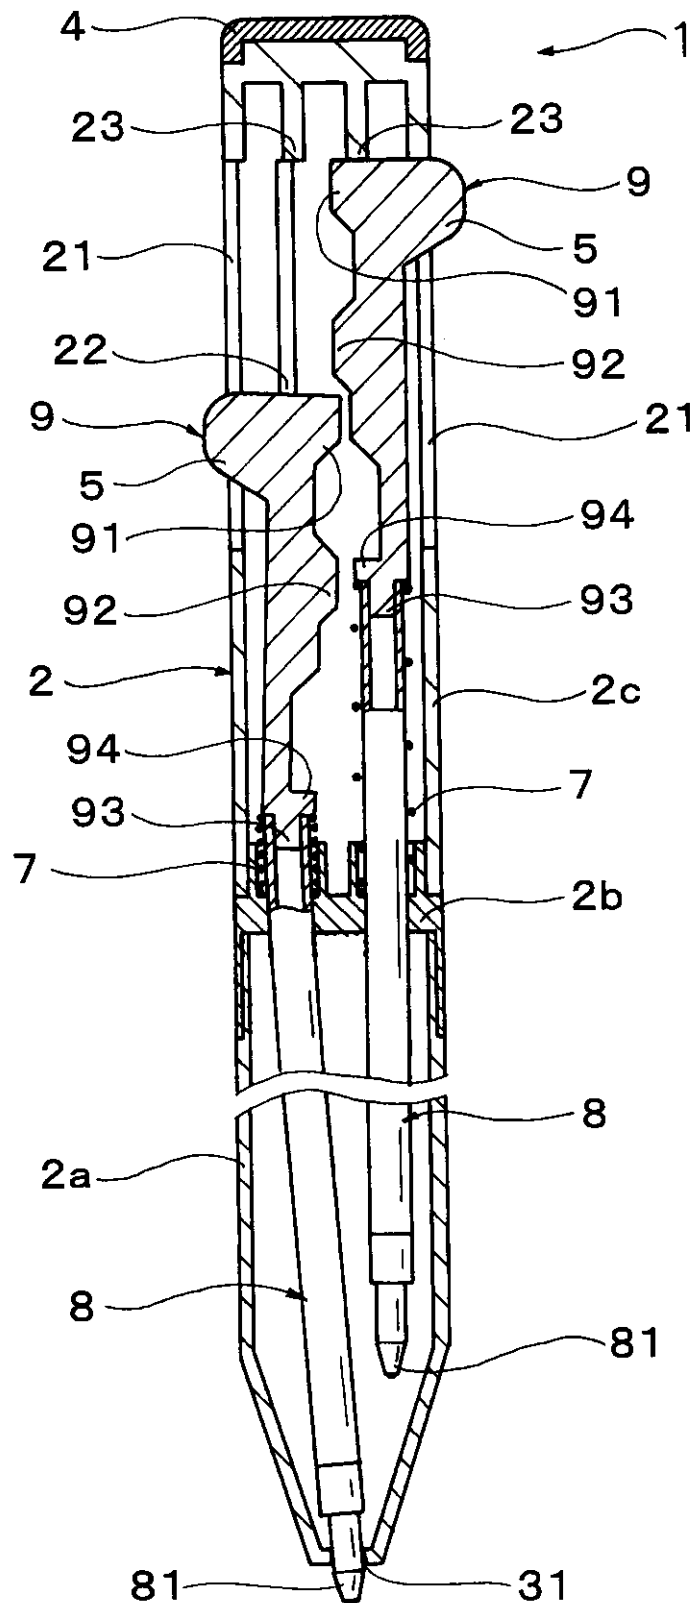


FIG. 16

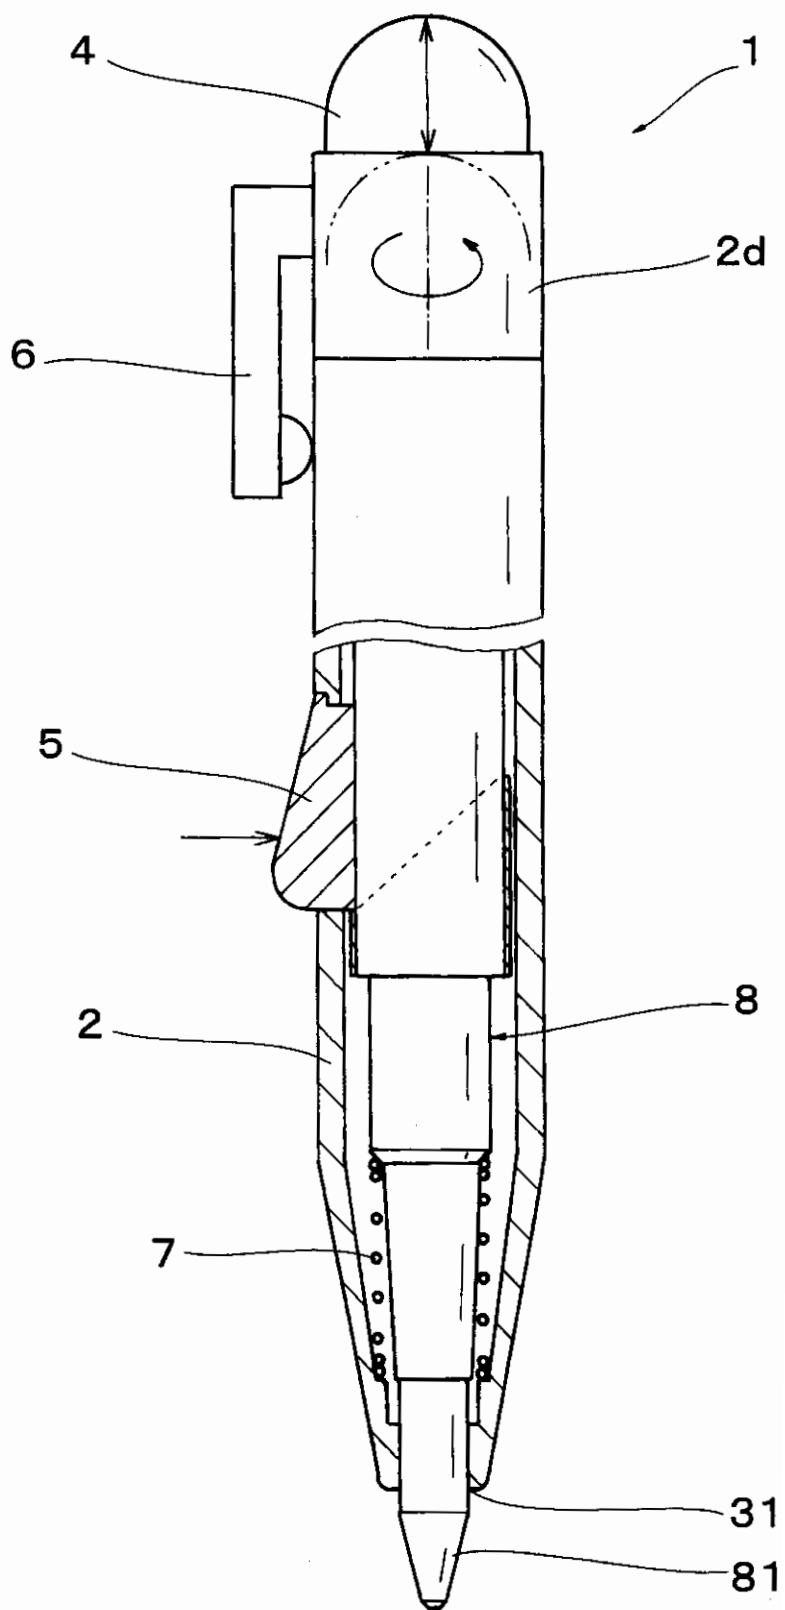


FIG. 17

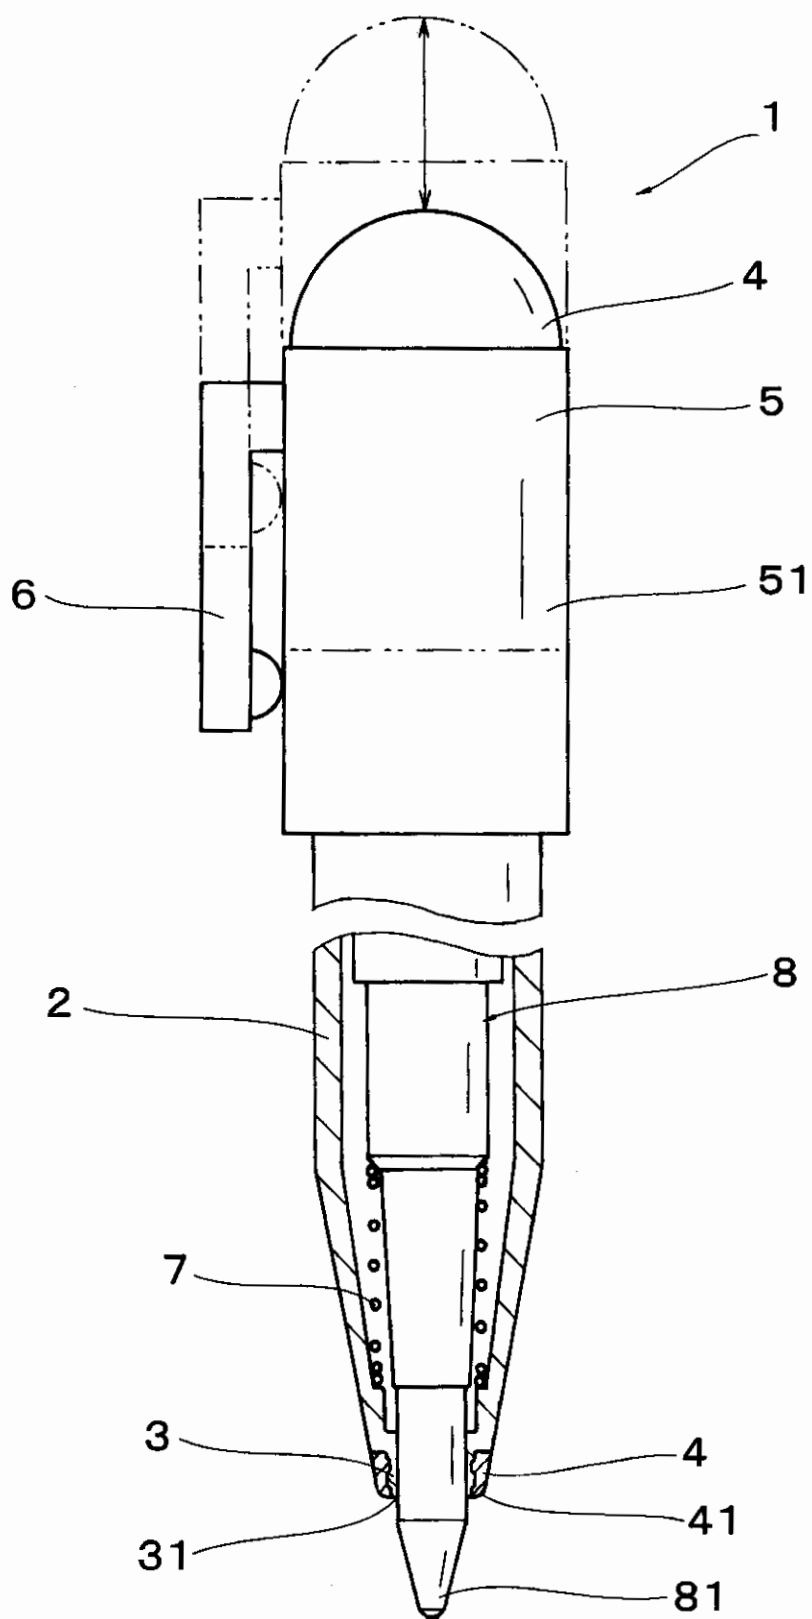


FIG. 18

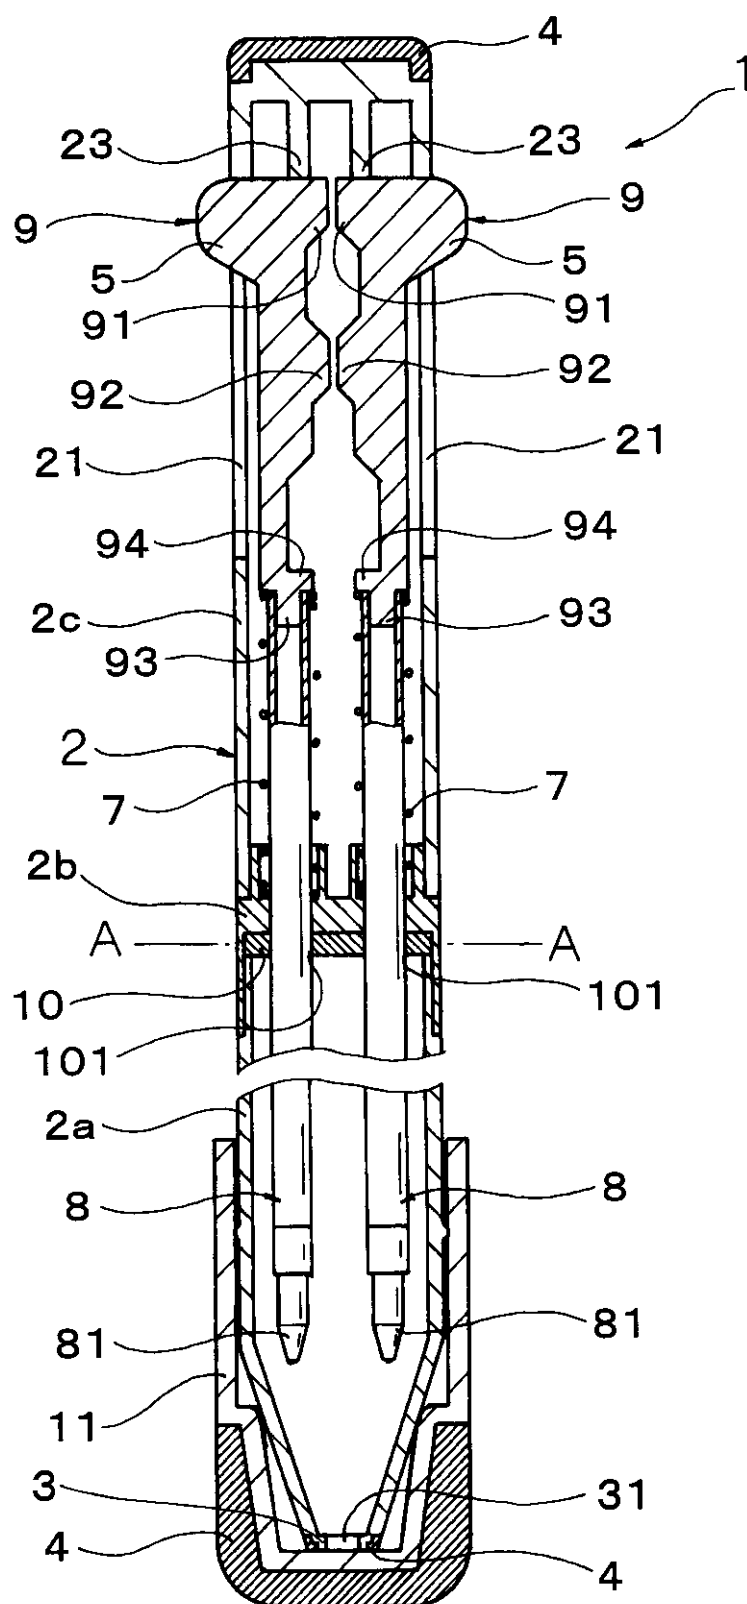


FIG. 19

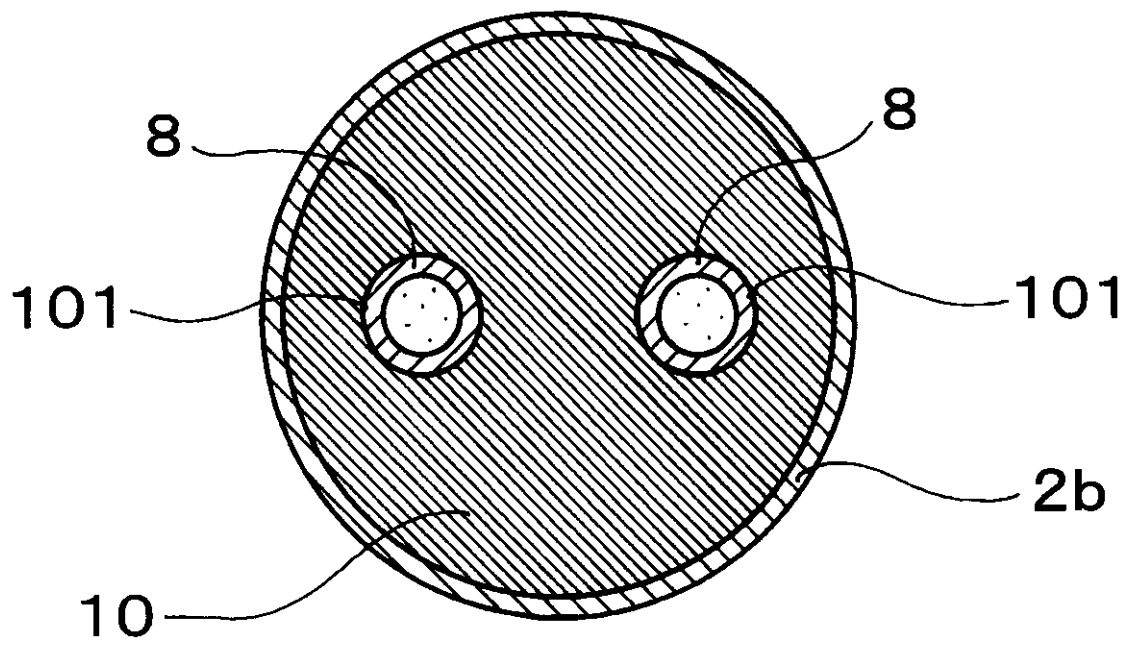


FIG. 20

