



(51) International Patent Classification:
A21B 1/00 (2006.01)

(21) International Application Number:
PCT/US2014/058836

(22) International Filing Date:
2 October 2014 (02.10.2014)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
14/045,257 3 October 2013 (03.10.2013) US

(71) Applicant: **APPLIANCE INNOVATION, INC.**
[US/US]; 10500 Metric Drive, Suite 128, Dallas, TX (US).

(72) Inventors: **MCKEE, Philip, R.**; 6 Windsor Ridge, Frisco, TX 75034 (US). **JOHNSON, Alex, Wayne**; 5148 Willis Avenue #2228, Dallas, TX 75206 (US).

(74) Agent: **EBENSTEIN, Daniel**; Amster, Rothstein & Ebenstein LLP, 90 Park Avenue, New York, NY 10016 (US).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: OVEN HAVING A ROTATING DOOR

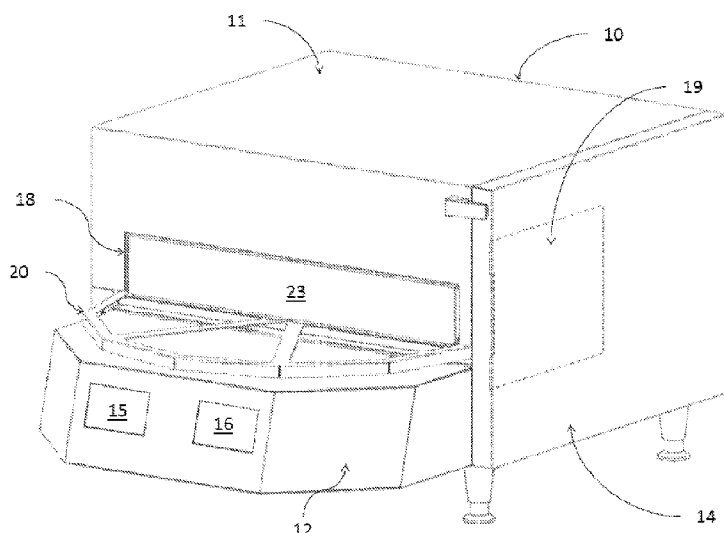


FIG 1

(57) Abstract: An oven comprising a housing, a cavity located within the housing, and a rotator having a first food loading section and a second food loading section is disclosed. The cavity includes a single opening for loading a food item into the cavity. If one of the first food loading section and the second food loading section is located outside of said cavity, then the other of the first food loading section and the second food loading section is located within said cavity. A first cook setting of the oven when the first food loading section is within the cavity and a second cook setting of the oven when the second food loading section is within the cavity are independently controllable. The first food loading section and the second food loading section may be separated by a divider, which prevents heat from escaping from the cavity through the opening.